
QLib Documentation

Release 0.7.2

Microsoft

Sep 30, 2021

Contents

1 Document Structure	3
1.1 Qlib: Quantitative Platform	3
1.2 Quick Start	4
1.3 Installation	6
1.4 Qlib Initialization	6
1.5 Data Retrieval	8
1.6 Custom Model Integration	10
1.7 Workflow: Workflow Management	13
1.8 Data Layer: Data Framework & Usage	18
1.9 Forecast Model: Model Training & Prediction	32
1.10 Portfolio Strategy: Portfolio Management	35
1.11 Intraday Trading: Model&Strategy Testing	38
1.12 Qlib Recorder: Experiment Management	40
1.13 Analysis: Evaluation & Results Analysis	54
1.14 Online Serving	66
1.15 Building Formulaic Alphas	75
1.16 Online & Offline mode	76
1.17 Serialization	77
1.18 Task Management	78
1.19 API Reference	83
1.20 Qlib FAQ	174
1.21 Changelog	177
Python Module Index	181
Index	183

`Qlib` is an AI-oriented quantitative investment platform, which aims to realize the potential, empower the research, and create the value of AI technologies in quantitative investment.

CHAPTER 1

Document Structure

1.1 Qlib: Quantitative Platform


1.1.1 Introduction



Qlib is an AI-oriented quantitative investment platform, which aims to realize the potential, empower the research, and create the value of AI technologies in quantitative investment.

With Qlib, users can easily try their ideas to create better Quant investment strategies.

1.1.2 Framework

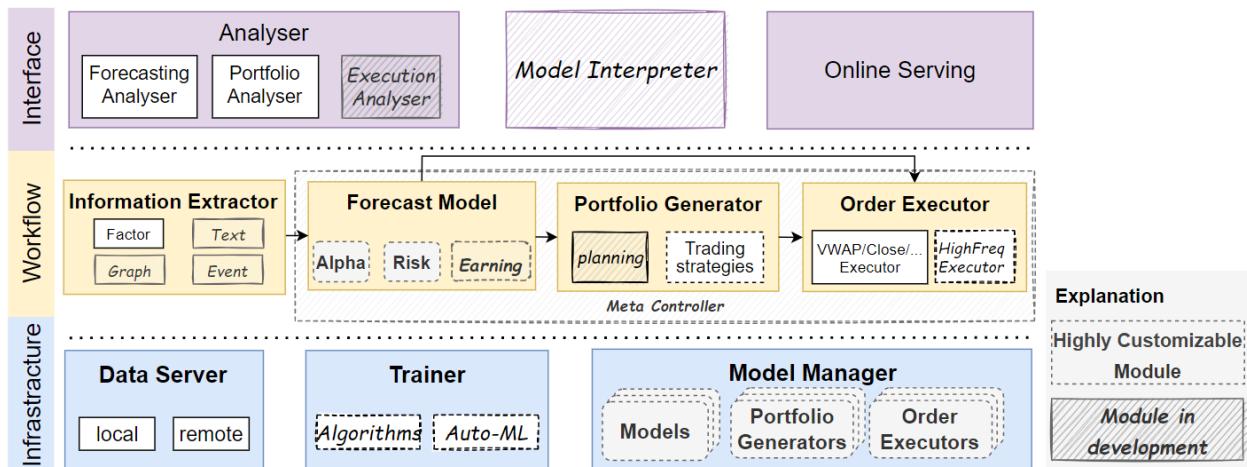

At the module level, Qlib is a platform that consists of above components. The components are designed as loose-coupled modules and each component could be used stand-alone.

Name	Description
<i>Infrastructure</i> layer	<i>Infrastructure</i> layer provides underlying support for Quant research. <i>DataServer</i> provides high-performance infrastructure for users to manage and retrieve raw data. <i>Trainer</i> provides flexible interface to control the training process of models which enable algorithms controlling the training process.
<i>Workflow</i> layer	<i>Workflow</i> layer covers the whole workflow of quantitative investment. <i>Information Extractor</i> extracts data for models. <i>Forecast Model</i> focuses on producing all kinds of forecast signals (e.g. <code>_alpha_</code> , risk) for other modules. With these signals <i>Portfolio Generator</i> will generate the target portfolio and produce orders to be executed by <i>Order Executor</i> .
<i>Interface</i> layer	<i>Interface</i> layer tries to present a user-friendly interface for the underlying system. <i>Analyser</i> module will provide users detailed analysis reports of forecasting signals, portfolios and execution results

- The modules with hand-drawn style are under development and will be released in the future.
- The modules with dashed borders are highly user-customizable and extendible.

1.2 Quick Start

1.2.1 Introduction

This Quick Start guide tries to demonstrate

- It's very easy to build a complete Quant research workflow and try users' ideas with Qlib.
- Though with public data and simple models, machine learning technologies work very well in practical Quant investment.

1.2.2 Installation

Users can easily install Qlib according to the following steps:

- Before installing Qlib from source, users need to install some dependencies:
- Clone the repository and install Qlib

To know more about *installation*, please refer to [Qlib Installation](#).

1.2.3 Prepare Data

Load and prepare data by running the following code:

This dataset is created by public data collected by crawler scripts in `scripts/data_collector/`, which have been released in the same repository. Users could create the same dataset with it.

To know more about *prepare data*, please refer to [Data Preparation](#).

1.2.4 Auto Quant Research Workflow

Qlib provides a tool named `qrun` to run the whole workflow automatically (including building dataset, training models, backtest and evaluation). Users can start an auto quant research workflow and have a graphical reports analysis according to the following steps:

- **Quant Research Workflow:**
 - Run `qrun` with a config file of the LightGBM model `workflow_config_lightgbm.yaml` as following.
 - **Workflow result** The result of `qrun` is as follows, which is also the typical result of Forecast model (`alpha`). Please refer to [Intraday Trading](#). for more details about the result.

	risk
excess_return_without_cost mean	0.000605
std	0.005481
annualized_return	0.152373
information_ratio	1.751319
max_drawdown	-0.059055
excess_return_with_cost mean	0.000410
std	0.005478
annualized_return	0.103265
information_ratio	1.187411
max_drawdown	-0.075024

To know more about *workflow* and *qrun*, please refer to [Workflow: Workflow Management](#).

- **Graphical Reports Analysis:**
 - **Run `examples/workflow_by_code.ipynb` with jupyter notebook** Users can have portfolio analysis or prediction score (model prediction) analysis by run `examples/workflow_by_code.ipynb`.
 - **Graphical Reports** Users can get graphical reports about the analysis, please refer to [Analysis: Evaluation & Results Analysis](#) for more details.

1.2.5 Custom Model Integration

Qlib provides a batch of models (such as lightGBM and MLP models) as examples of Forecast Model. In addition to the default model, users can integrate their own custom models into Qlib. If users are interested in the custom model, please refer to [Custom Model Integration](#).

1.3 Installation

1.3.1 Qlib Installation

Note: *Qlib* supports both *Windows* and *Linux*. It's recommended to use *Qlib* in *Linux*. *Qlib* supports Python3, which is up to Python3.8.

Users can easily install *Qlib* by pip according to the following command:

```
pip install pyqlib
```

Also, Users can install *Qlib* by the source code according to the following steps:

- Enter the root directory of *Qlib*, in which the file `setup.py` exists.
- Then, please execute the following command to install the environment dependencies and install *Qlib*:

```
$ pip install numpy  
$ pip install --upgrade cython  
$ git clone https://github.com/microsoft/qlib.git && cd qlib  
$ python setup.py install
```

Note: It's recommended to use anaconda/miniconda to setup the environment. *Qlib* needs lightgbm and pytorch packages, use pip to install them.

Use the following code to make sure the installation successful:

```
>>> import qlib  
>>> qlib.__version__  
<LATEST VERSION>
```

1.4 Qlib Initialization

1.4.1 Initialization

Please follow the steps below to initialize *Qlib*.

Download and prepare the Data: execute the following command to download stock data. Please pay *attention* that the data is collected from [Yahoo Finance](#) and the data might not be perfect. We recommend users to prepare their own data if they have high-quality datasets. Please refer to [Data](#) for more information about customized dataset.

```
python scripts/get_data.py qlib_data --target_dir ~/.qlib/qlib_data/cn_data -  
--region cn
```

Please refer to [Data Preparation](#) for more information about `get_data.py`,

Initialize Qlib before calling other APIs: run following code in python.

```
import qlib  
# region in [REG_CN, REG_US]  
from qlib.config import REG_CN  
provider_uri = "~/.qlib/qlib_data/cn_data" # target_dir  
qlib.init(provider_uri=provider_uri, region=REG_CN)
```

Note: Do not import `qlib` package in the repository directory of `Qlib`, otherwise, errors may occur.

Parameters

Besides `provider_uri` and `region`, `qlib.init` has other parameters. The following are several important parameters of `qlib.init`:

- **`provider_uri`** Type: str. The URI of the Qlib data. For example, it could be the location where the data loaded by `get_data.py` are stored.

- **`region`**

Type: str, optional parameter(default: `qlib.config.REG_CN`). Currently: `qlib.config.REG_US` ('us') and `qlib.config.REG_CN` ('cn') is supported. Different value of `region` will result in different stock market mode. - `qlib.config.REG_US`: US stock market. - `qlib.config.REG_CN`: China stock market.

Different modes will result in different trading limitations and costs.

- **`redis_host`**

Type: str, optional parameter(default: "127.0.0.1"), host of `redis` The lock and cache mechanism relies on `redis`.

- **`redis_port`** Type: int, optional parameter(default: 6379), port of `redis`

Note: The value of `region` should be aligned with the data stored in `provider_uri`. Currently, `scripts/get_data.py` only provides China stock market data. If users want to use the US stock market data, they should prepare their own US-stock data in `provider_uri` and switch to US-stock mode.

Note: If Qlib fails to connect `redis` via `redis_host` and `redis_port`, cache mechanism will not be used! Please refer to [Cache](#) for details.

- **`exp_manager`** Type: dict, optional parameter, the setting of `experiment manager` to be used in `qlib`. Users can specify an experiment manager class, as well as the tracking URI for all the experiments. However, please be aware that we only support input of a dictionary in the following style for `exp_manager`. For more information about `exp_manager`, users can refer to [Recorder: Experiment Management](#).

```
# For example, if you want to set your tracking_uri to a <specific folder>, you can initialize qlib below
qlib.init(provider_uri=provider_uri, region=REG_CN, exp_manager= {
    "class": "MLflowExpManager",
    "module_path": "qlib.workflow.expm",
    "kwargs": {
        "uri": "python_execution_path/mlruns",
        "default_exp_name": "Experiment",
    }
})
```

- **mongo** Type: dict, optional parameter, the setting of MongoDB which will be used in some features such as Task Management, with high performance and clustered processing. Users need to follow the steps in [installation](#) to install MongoDB firstly and then access it via a URI. Users can access mongodb with credential by setting “task_url” to a string like “`mongodb://%s:%s@%s`” % (user, pwd, host + “:” + port).

```
# For example, you can initialize qlib below
qlib.init(provider_uri=provider_uri, region=REG_CN, mongo={
    "task_url": "mongodb://localhost:27017/", # your mongo url
    "task_db_name": "rolling_db", # the database name of Task Management
})
```

1.5 Data Retrieval

1.5.1 Introduction

Users can get stock data with Qlib. The following examples demonstrate the basic user interface.

1.5.2 Examples

QLib Initialization:

Note: In order to get the data, users need to initialize Qlib with `qlib.init` first. Please refer to [initialization](#).

If users followed steps in [initialization](#) and downloaded the data, they should use the following code to initialize qlib

```
>> import qlib
>> qlib.init(provider_uri='~/.qlib/qlib_data/cn_data')
```

Load trading calendar with given time range and frequency:

```
>> from qlib.data import D
>> D.calendar(start_time='2010-01-01', end_time='2017-12-31', freq='day')[:2]
[Timestamp('2010-01-04 00:00:00'), Timestamp('2010-01-05 00:00:00')]
```

Parse a given market name into a stock pool config:

```
>> from qlib.data import D
>> D.instruments(market='all')
{'market': 'all', 'filter_pipe': []}
```

Load instruments of certain stock pool in the given time range:

```
>> from qlib.data import D
>> instruments = D.instruments(market='csi300')
>> D.list_instruments(instruments=instruments, start_time='2010-01-01', end_time=
    ↪'2017-12-31', as_list=True) [:6]
['SH600036', 'SH600110', 'SH600087', 'SH600900', 'SH600089', 'SZ000912']
```

Load dynamic instruments from a base market according to a name filter

```
>> from qlib.data import D
>> from qlib.data.filter import NameDFilter
>> nameDFilter = NameDFilter(name_rule_re='SH[0-9]{4}55')
>> instruments = D.instruments(market='csi300', filter_pipe=[nameDFilter])
>> D.list_instruments(instruments=instruments, start_time='2015-01-01', end_time=
    ↪'2016-02-15', as_list=True)
['SH600655', 'SH601555']
```

Load dynamic instruments from a base market according to an expression filter

```
>> from qlib.data import D
>> from qlib.data.filter import ExpressionDFilter
>> expressionDFilter = ExpressionDFilter(rule_expression='$close>2000')
>> instruments = D.instruments(market='csi300', filter_pipe=[expressionDFilter])
>> D.list_instruments(instruments=instruments, start_time='2015-01-01', end_time=
    ↪'2016-02-15', as_list=True)
['SZ000651', 'SZ000002', 'SH600655', 'SH600570']
```

For more details about filter, please refer [Filter API](#).

Load features of certain instruments in a given time range:

```
>> from qlib.data import D
>> instruments = ['SH600000']
>> fields = ['$close', '$volume', 'Ref($close, 1)', 'Mean($close, 3)', '$high-$low']
>> D.features(instruments, fields, start_time='2010-01-01', end_time='2017-12-31',
    ↪freq='day').head()

      $close      $volume  Ref($close, 1)  Mean($close, 3)  $high-
    ↪$low
      instrument  datetime
      SH600000  2010-01-04  86.778313  16162960.0      88.825928  88.061483
    ↪2.907631
      2010-01-05  87.433578  28117442.0      86.778313  87.679273
    ↪3.235252
      2010-01-06  85.713585  23632884.0      87.433578  86.641825
    ↪1.720009
      2010-01-07  83.788803  20813402.0      85.713585  85.645322
    ↪3.030487
      2010-01-08  84.730675  16044853.0      83.788803  84.744354
    ↪2.047623
```

Load features of certain stock pool in a given time range:

Note: With cache enabled, the qlib data server will cache data all the time for the requested stock pool and fields, it may take longer to process the request for the first time than that without cache. But after the first time, requests with the same stock pool and fields will hit the cache and be processed faster even the requested time period changes.

```
>> from qlib.data import D
>> from qlib.data.filter import NameDFilter, ExpressionDFilter
>> nameDFilter = NameDFilter(name_rule_re='SH[0-9]{4}55')
>> expressionDFilter = ExpressionDFilter(rule_expression='$close>Ref($close,1)')
>> instruments = D.instruments(market='csi300', filter_pipe=[nameDFilter, expressionDFilter])
>> fields = ['$close', '$volume', 'Ref($close, 1)', 'Mean($close, 3)', '$high-$low']
>> D.features(instruments, fields, start_time='2010-01-01', end_time='2017-12-31', freq='day').head()

          $close      $volume  Ref($close, 1)  Mean($close, 3)
$high-$low
instrument  datetime
SH600655    2010-01-04  2699.567383  158193.328125  2619.070312  2626.
097738    124.580566
              2010-01-08  2612.359619  77501.406250  2584.567627  2623.
220133    83.373047
              2010-01-11  2712.982422  160852.390625  2612.359619  2636.
636556    146.621582
              2010-01-12  2788.688232  164587.937500  2712.982422  2704.
676758    128.413818
              2010-01-13  2790.604004  145460.453125  2788.688232  2764.
091553    128.413818
```

For more details about features, please refer [Feature API](#).

Note: When calling `D.features()` at the client, use parameter `disk_cache=0` to skip dataset cache, use `disk_cache=1` to generate and use dataset cache. In addition, when calling at the server, users can use `disk_cache=2` to update the dataset cache.

1.5.3 API

To know more about how to use the Data, go to API Reference: [Data API](#)

1.6 Custom Model Integration

1.6.1 Introduction

Qlib's *Model Zoo* includes models such as LightGBM, MLP, LSTM, etc.. These models are examples of Forecast Model. In addition to the default models Qlib provide, users can integrate their own custom models into Qlib.

Users can integrate their own custom models according to the following steps.

- Define a custom model class, which should be a subclass of the `qlib.model.base.Model`.
- Write a configuration file that describes the path and parameters of the custom model.
- Test the custom model.

1.6.2 Custom Model Class

The Custom models need to inherit `qlib.model.base.Model` and override the methods in it.

- **Override the `__init__` method**

- Qlib passes the initialized parameters to the `__init__` method.
- The hyperparameters of model in the configuration must be consistent with those defined in the `__init__` method.
- Code Example: In the following example, the hyperparameters of model in the configuration file should contain parameters such as `loss:mse`.

```
def __init__(self, loss='mse', **kwargs):
    if loss not in {'mse', 'binary'}:
        raise NotImplementedError
    self._scorer = mean_squared_error if loss == 'mse' else roc_auc_score
    self._params.update(objective=loss, **kwargs)
    self._model = None
```

- **Override the `fit` method**

- Qlib calls the `fit` method to train the model.
- The parameters must include training feature `dataset`, which is designed in the interface.
- The parameters could include some *optional* parameters with default values, such as `num_boost_round = 1000` for `GBDT`.
- Code Example: In the following example, `num_boost_round = 1000` is an optional parameter.

```
def fit(self, dataset: DatasetH, num_boost_round = 1000, **kwargs):

    # prepare dataset for lgb training and evaluation
    df_train, df_valid = dataset.prepare(
        ["train", "valid"], col_set=["feature", "label"], data_
    ↪key=DataHandlerLP.DK_L
    )
    x_train, y_train = df_train["feature"], df_train["label"]
    x_valid, y_valid = df_valid["feature"], df_valid["label"]

    # Lightgbm need 1D array as its label
    if y_train.values.ndim == 2 and y_train.values.shape[1] == 1:
        y_train, y_valid = np.squeeze(y_train.values), np.squeeze(y_valid.
    ↪values)
    else:
        raise ValueError("LightGBM doesn't support multi-label training")

    dtrain = lgb.Dataset(x_train.values, label=y_train)
    dvalid = lgb.Dataset(x_valid.values, label=y_valid)

    # fit the model
    self.model = lgb.train(
        self.params,
        dtrain,
        num_boost_round=num_boost_round,
        valid_sets=[dtrain, dvalid],
        valid_names=["train", "valid"],
        early_stopping_rounds=early_stopping_rounds,
        verbose_eval=verbose_eval,
        evals_result=evals_result,
        **kwargs
    )
```

- **Override the *predict* method**

- The parameters must include the parameter *dataset*, which will be used to get the test dataset.
- Return the *prediction score*.
- Please refer to [Model API](#) for the parameter types of the fit method.
- Code Example: In the following example, users need to use *LightGBM* to predict the label(such as *preds*) of test data *x_test* and return it.

```
def predict(self, dataset: DatasetH, **kwargs) -> pandas.Series:  
    if self.model is None:  
        raise ValueError("model is not fitted yet!")  
    x_test = dataset.prepare("test", col_set="feature", data_  
    ↪key=DataHandlerLP.DK_I)  
    return pd.Series(self.model.predict(x_test.values), index=x_test.index)
```

- **Override the *finetune* method (Optional)**

- This method is optional to the users. When users want to use this method on their own models, they should inherit the [ModelFT](#) base class, which includes the interface of *finetune*.
- The parameters must include the parameter *dataset*.
- Code Example: In the following example, users will use *LightGBM* as the model and finetune it.

```
def finetune(self, dataset: DatasetH, num_boost_round=10, verbose_eval=20):  
    # Based on existing model and finetune by train more rounds  
    dtrain, _ = self._prepare_data(dataset)  
    self.model = lgb.train(  
        self.params,  
        dtrain,  
        num_boost_round=num_boost_round,  
        init_model=self.model,  
        valid_sets=[dtrain],  
        valid_names=["train"],  
        verbose_eval=verbose_eval,  
    )
```

1.6.3 Configuration File

The configuration file is described in detail in the [Workflow](#) document. In order to integrate the custom model into Qlib, users need to modify the “model” field in the configuration file. The configuration describes which models to use and how we can initialize it.

- Example: The following example describes the *model* field of configuration file about the custom lightgbm model mentioned above, where *module_path* is the module path, *class* is the class name, and *args* is the hyper-parameter passed into the *__init__* method. All parameters in the field is passed to *self._params* by ***kwargs* in *__init__* except *loss = mse*.

```
model:  
    class: LGBModel  
    module_path: qlib.contrib.model.gbdt  
    args:  
        loss: mse  
        colsample_bytree: 0.8879  
        learning_rate: 0.0421
```

(continues on next page)

(continued from previous page)

```
subsample: 0.8789
lambda_11: 205.6999
lambda_12: 580.9768
max_depth: 8
num_leaves: 210
num_threads: 20
```

Users could find configuration file of the baselines of the Model in examples/benchmarks. All the configurations of different models are listed under the corresponding model folder.

1.6.4 Model Testing

Assuming that the configuration file is examples/benchmarks/LightGBM/workflow_config_lightgbm.yaml, users can run the following command to test the custom model:

```
cd examples # Avoid running program under the directory contains `qlib`
qrun benchmarks/LightGBM/workflow_config_lightgbm.yaml
```

Note: qrun is a built-in command of Qlib.

Also, Model can also be tested as a single module. An example has been given in examples/workflow_by_code.ipynb.

1.6.5 Reference

To know more about Forecast Model, please refer to [Forecast Model: Model Training & Prediction](#) and [Model API](#).

1.7 Workflow: Workflow Management

1.7.1 Introduction

The components in [Qlib Framework](#) are designed in a loosely-coupled way. Users could build their own Quant research workflow with these components like [Example](#).

Besides, Qlib provides more user-friendly interfaces named qrun to automatically run the whole workflow defined by configuration. Running the whole workflow is called an *execution*. With qrun, user can easily start an *execution*, which includes the following steps:

- **Data**
 - Loading
 - Processing
 - Slicing
- **Model**
 - Training and inference
 - Saving & loading

- Evaluation

- Forecast signal analysis
- Backtest

For each *execution*, Qlib has a complete system to tracking all the information as well as artifacts generated during training, inference and evaluation phase. For more information about how Qlib handles this, please refer to the related document: [Recorder: Experiment Management](#).

1.7.2 Complete Example

Before getting into details, here is a complete example of `qrun`, which defines the workflow in typical Quant research. Below is a typical config file of `qrun`.

```
qlib_init:  
    provider_uri: "~/.qlib/qlib_data/cn_data"  
    region: cn  
market: &market csi300  
benchmark: &benchmark SH000300  
data_handler_config: &data_handler_config  
    start_time: 2008-01-01  
    end_time: 2020-08-01  
    fit_start_time: 2008-01-01  
    fit_end_time: 2014-12-31  
    instruments: *market  
port_analysis_config: &port_analysis_config  
    strategy:  
        class: TopkDropoutStrategy  
        module_path: qlib.contrib.strategy.strategy  
        kwargs:  
            topk: 50  
            n_drop: 5  
backtest:  
    verbose: False  
    limit_threshold: 0.095  
    account: 1000000000  
    benchmark: *benchmark  
    deal_price: close  
    open_cost: 0.0005  
    close_cost: 0.0015  
    min_cost: 5  
task:  
    model:  
        class: LGBModel  
        module_path: qlib.contrib.model.gbdt  
        kwargs:  
            loss: mse  
            colsample_bytree: 0.8879  
            learning_rate: 0.0421  
            subsample: 0.8789  
            lambda_11: 205.6999  
            lambda_12: 580.9768  
            max_depth: 8  
            num_leaves: 210  
            num_threads: 20  
dataset:  
    class: DatasetH
```

(continues on next page)

(continued from previous page)

```

module_path: qlib.data.dataset
kwargs:
  handler:
    class: Alpha158
    module_path: qlib.contrib.data.handler
    kwargs: *data_handler_config
  segments:
    train: [2008-01-01, 2014-12-31]
    valid: [2015-01-01, 2016-12-31]
    test: [2017-01-01, 2020-08-01]
  record:
    - class: SignalRecord
      module_path: qlib.workflow.record_temp
      kwargs: {}
    - class: PortAnaRecord
      module_path: qlib.workflow.record_temp
      kwargs:
        config: *port_analysis_config

```

After saving the config into `configuration.yaml`, users could start the workflow and test their ideas with a single command below.

```
qrun configuration.yaml
```

If users want to use `qrun` under debug mode, please use the following command:

```
python -m pdb qlib/workflow/cli.py examples/benchmarks/LightGBM/workflow_config_
→lightgbm_Alpha158.yaml
```

Note: `qrun` will be placed in your \$PATH directory when installing Qlib.

Note: The symbol & in `yaml` file stands for an anchor of a field, which is useful when another fields include this parameter as part of the value. Taking the configuration file above as an example, users can directly change the value of `market` and `benchmark` without traversing the entire configuration file.

1.7.3 Configuration File

Let's get into details of `qrun` in this section.

Before using `qrun`, users need to prepare a configuration file. The following content shows how to prepare each part of the configuration file.

Qlib Init Section

At first, the configuration file needs to contain several basic parameters which will be used for qlib initialization.

```

provider_uri: "~/.qlib/qlib_data/cn_data"
region: cn

```

The meaning of each field is as follows:

- **provider_uri** Type: str. The URI of the Qlib data. For example, it could be the location where the data loaded by `get_data.py` are stored.
- **region**
 - If `region == "us"`, Qlib will be initialized in US-stock mode.
 - If `region == "cn"`, Qlib will be initialized in China-stock mode.

Note: The value of `region` should be aligned with the data stored in `provider_uri`.

Task Section

The `task` field in the configuration corresponds to a `task`, which contains the parameters of three different subsections: `Model`, `Dataset` and `Record`.

Model Section

In the `task` field, the `model` section describes the parameters of the model to be used for training and inference. For more information about the base `Model` class, please refer to [Qlib Model](#).

```
model:  
    class: LGBModel  
    module_path: qlib.contrib.model.gbdt  
    kwargs:  
        loss: mse  
        colsample_bytree: 0.8879  
        learning_rate: 0.0421  
        subsample: 0.8789  
        lambda_11: 205.6999  
        lambda_12: 580.9768  
        max_depth: 8  
        num_leaves: 210  
        num_threads: 20
```

The meaning of each field is as follows:

- **class** Type: str. The name for the model class.
- **module_path** Type: str. The path for the model in qlib.
- **kwargs** The keywords arguments for the model. Please refer to the specific model implementation for more information: [models](#).

Note: Qlib provides a util named: `init_instance_by_config` to initialize any class inside Qlib with the configuration includes the fields: `class`, `module_path` and `kwargs`.

Dataset Section

The `dataset` field describes the parameters for the Dataset module in Qlib as well those for the module DataHandler. For more information about the Dataset module, please refer to [Qlib Model](#).

The keywords arguments configuration of the DataHandler is as follows:

```
data_handler_config: &data_handler_config
  start_time: 2008-01-01
  end_time: 2020-08-01
  fit_start_time: 2008-01-01
  fit_end_time: 2014-12-31
  instruments: *market
```

Users can refer to the document of [DataHandler](#) for more information about the meaning of each field in the configuration.

Here is the configuration for the Dataset module which will take care of data prepossing and slicing during the training and testing phase.

```
dataset:
  class: DatasetH
  module_path: qlib.data.dataset
  kwargs:
    handler:
      class: Alpha158
      module_path: qlib.contrib.data.handler
      kwargs: *data_handler_config
    segments:
      train: [2008-01-01, 2014-12-31]
      valid: [2015-01-01, 2016-12-31]
      test: [2017-01-01, 2020-08-01]
```

Record Section

The *record* field is about the parameters the Record module in Qlib. Record is responsible for tracking training process and results such as *information Coefficient (IC)* and *backtest* in a standard format.

The following script is the configuration of *backtest* and the *strategy* used in *backtest*:

```
port_analysis_config: &port_analysis_config
  strategy:
    class: TopkDropoutStrategy
    module_path: qlib.contrib.strategy.strategy
    kwargs:
      topk: 50
      n_drop: 5
  backtest:
    verbose: False
    limit_threshold: 0.095
    account: 100000000
    benchmark: *benchmark
    deal_price: close
    open_cost: 0.0005
    close_cost: 0.0015
    min_cost: 5
```

For more information about the meaning of each field in configuration of *strategy* and *backtest*, users can look up the documents: [Strategy](#) and [Backtest](#).

Here is the configuration details of different *Record Template* such as *SignalRecord* and *PortAnaRecord*:

```
record:
  - class: SignalRecord
    module_path: qlib.workflow.record_temp
    kwargs: {}
  - class: PortAnaRecord
    module_path: qlib.workflow.record_temp
    kwargs:
      config: *port_analysis_config
```

For more information about the Record module in Qlib, user can refer to the related document: [Record](#).

1.8 Data Layer: Data Framework & Usage

1.8.1 Introduction

Data Layer provides user-friendly APIs to manage and retrieve data. It provides high-performance data infrastructure.

It is designed for quantitative investment. For example, users could build formulaic alphas with Data Layer easily. Please refer to [Building Formulaic Alphas](#) for more details.

The introduction of Data Layer includes the following parts.

- Data Preparation
- Data API
- Data Loader
- Data Handler
- Dataset
- Cache
- Data and Cache File Structure

1.8.2 Data Preparation

Qlib Format Data

We've specially designed a data structure to manage financial data, please refer to the [File storage design section](#) in [Qlib paper](#) for detailed information. Such data will be stored with filename suffix `.bin` (We'll call them `.bin` file, `.bin` format, or `qlib` format). `.bin` file is designed for scientific computing on finance data.

Qlib provides two different off-the-shelf datasets, which can be accessed through this [link](#):

Dataset	US Market	China Market
Alpha360		
Alpha158		

Also, Qlib provides a high-frequency dataset. Users can run a high-frequency dataset example through this [link](#).

Qlib Format Dataset

Qlib has provided an off-the-shelf dataset in `.bin` format, users could use the script `scripts/get_data.py` to download the China-Stock dataset as follows.

```
# download 1d
python scripts/get_data.py qlib_data --target_dir ~/.qlib/qlib_data/cn_data --region cn

# download 1min
python scripts/get_data.py qlib_data --target_dir ~/.qlib/qlib_data/qlib_cn_1min --
    ↪region cn --interval 1min
```

In addition to China-Stock data, Qlib also includes a US-Stock dataset, which can be downloaded with the following command:

```
python scripts/get_data.py qlib_data --target_dir ~/.qlib/qlib_data/us_data --region us
```

After running the above command, users can find china-stock and us-stock data in Qlib format in the `~/.qlib/qlib_data/cn_data` directory and `~/.qlib/qlib_data/us_data` directory respectively.

Qlib also provides the scripts in `scripts/data_collector` to help users crawl the latest data on the Internet and convert it to qlib format.

When Qlib is initialized with this dataset, users could build and evaluate their own models with it. Please refer to [Initialization](#) for more details.

Automatic update of daily frequency data

It is recommended that users update the data manually once (`--trading_date 2021-05-25`) and then set it to update automatically.

For more information refer to: [yahoo collector](#)

- **Automatic update of data to the “qlib” directory each trading day(Linux)**

- use `crontab: crontab -e`
- set up timed tasks:

```
* * * * 1-5 python <script path> update_data_to_bin --qlib_data_1d_
    ↪dir <user data dir>
```

* **script path:** `scripts/data_collector/yahoo/collector.py`

- Manual update of data

```
python scripts/data_collector/yahoo/collector.py update_data_to_
    ↪bin --qlib_data_1d_dir <user data dir> --trading_date <start_
        ↪date> --end_date <end date>
```

- `trading_date`: start of trading day
- `end_date`: end of trading day(not included)

Converting CSV Format into Qlib Format

Qlib has provided the script `scripts/dump_bin.py` to convert **any** data in CSV format into `.bin` files (Qlib format) as long as they are in the correct format.

Besides downloading the prepared demo data, users could download demo data directly from the Collector as follows for reference to the CSV format. Here are some example:

for daily data:

```
python scripts/get_data.py csv_data_cn --target_dir ~/.qlib/csv_data/cn_data
```

for 1min data:

```
python scripts/data_collector/yahoo/collector.py download_data --source_dir ~/.qlib/stock_data/source/cn_1min --region CN --start 2021-05-20 --end 2021-05-23 --delay 0.1 --interval 1min --limit_nums 10
```

Users can also provide their own data in CSV format. However, the CSV data **must satisfies** following criterions:

- CSV file is named after a specific stock *or* the CSV file includes a column of the stock name
 - Name the CSV file after a stock: `SH600000.csv`, `AAPL.csv` (not case sensitive).
 - CSV file includes a column of the stock name. User **must** specify the column name when dumping the data. Here is an example:

```
python scripts/dump_bin.py dump_all ... --symbol_field_name symbol
```

where the data are in the following format:

- CSV file **must** includes a column for the date, and when dumping the data, user must specify the date column name. Here is an example:

```
python scripts/dump_bin.py dump_all ... --date_field_name date
```

where the data are in the following format:

Supposed that users prepare their CSV format data in the directory `~/.qlib/csv_data/my_data`, they can run the following command to start the conversion.

```
python scripts/dump_bin.py dump_all --csv_path ~/.qlib/csv_data/my_data --qlib_dir ~/.qlib/qlib_data/my_data --include_fields open,close,high,low,volume,factor
```

For other supported parameters when dumping the data into `.bin` file, users can refer to the information by running the following commands:

```
python dump_bin.py dump_all --help
```

After conversion, users can find their Qlib format data in the directory `~/.qlib/qlib_data/my_data`.

Note: The arguments of `--include_fields` should correspond with the column names of CSV files. The columns names of dataset provided by Qlib should include `open`, `close`, `high`, `low`, `volume` and `factor` at least.

- `open` The adjusted opening price
- `close` The adjusted closing price
- `high` The adjusted highest price
- `low` The adjusted lowest price

- **volume** The adjusted trading volume
- **factor** The Restoration factor. Normally, `factor = adjusted_price / original_price`, *adjusted price* reference: [split adjusted](#)

In the convention of *Qlib* data processing, *open*, *close*, *high*, *low*, *volume*, *money* and *factor* will be set to NaN if the stock is suspended. If you want to use your own alpha-factor which can't be calculate by OCHLV, like PE, EPS and so on, you could add it to the CSV files with OHCLV together and then dump it to the *Qlib* format data.

Stock Pool (Market)

Qlib defines stock pool as stock list and their date ranges. Predefined stock pools (e.g. csi300) may be imported as follows.

```
python collector.py --index_name CSI300 --qlib_dir <user qlib data dir> --method ↴parse_instruments
```

Multiple Stock Modes

Qlib now provides two different stock modes for users: China-Stock Mode & US-Stock Mode. Here are some different settings of these two modes:

Region	Trade Unit	Limit Threshold
China	100	0.099
US	1	None

The *trade unit* defines the unit number of stocks can be used in a trade, and the *limit threshold* defines the bound set to the percentage of ups and downs of a stock.

- **If users use Qlib in china-stock mode, china-stock data is required. Users can use Qlib in china-stock mode according to the following steps:**

- Download china-stock in qlib format, please refer to section [Qlib Format Dataset](#).
- **Initialize Qlib in china-stock mode** Supposed that users download their *Qlib* format data in the directory `~/.qlib/qlib_data/cn_data`. Users only need to initialize *Qlib* as follows.

```
from qlib.config import REG_CN
qlib.init(provider_uri='~/qlib/qlib_data/cn_data', region=REG_CN)
```

- **If users use Qlib in US-stock mode, US-stock data is required. Qlib also provides a script to download US-stock data. Users can use Qlib in us-stock mode according to the following steps:**

- Download us-stock in qlib format, please refer to section [Qlib Format Dataset](#).
- **Initialize Qlib in US-stock mode** Supposed that users prepare their *Qlib* format data in the directory `~/.qlib/qlib_data/us_data`. Users only need to initialize *Qlib* as follows.

```
from qlib.config import REG_US
qlib.init(provider_uri='~/qlib/qlib_data/us_data', region=REG_US)
```

Note: PRs for new data source are highly welcome! Users could commit the code to crawl data as a PR like [the examples here](#). And then we will use the code to create data cache on our server which other users could use directly.

1.8.3 Data API

Data Retrieval

Users can use APIs in `qlib.data` to retrieve data, please refer to [Data Retrieval](#).

Feature

`Qlib` provides *Feature* and *ExpressionOps* to fetch the features according to users' needs.

- **Feature** Load data from the data provider. User can get the features like `$high`, `$low`, `$open`, `$close`, .etc, which should correspond with the arguments of `-include_fields`, please refer to section [Converting CSV Format into Qlib Format](#).
- **ExpressionOps** *ExpressionOps* will use operator for feature construction. To know more about Operator, please refer to [Operator API](#). Also, `Qlib` supports users to define their own custom Operator, an example has been given in `tests/test_register_ops.py`.

To know more about Feature, please refer to [Feature API](#).

Filter

`Qlib` provides *NameDFilter* and *ExpressionDFilter* to filter the instruments according to users' needs.

- **NameDFilter** Name dynamic instrument filter. Filter the instruments based on a regulated name format. A name rule regular expression is required.
- **ExpressionDFilter** Expression dynamic instrument filter. Filter the instruments based on a certain expression. An expression rule indicating a certain feature field is required.
 - *basic features filter*: `rule_expression = '$close/$open>5'`
 - *cross-sectional features filter* : `rule_expression = '$rank($close)<10'`
 - *time-sequence features filter*: `rule_expression = '$Ref($close, 3)>100'`

Here is a simple example showing how to use filter in a basic `Qlib` workflow configuration file:

```
filter: &filter
    filter_type: ExpressionDFilter
    rule_expression: "Ref($close, -2) / Ref($close, -1) > 1"
    filter_start_time: 2010-01-01
    filter_end_time: 2010-01-07
    keep: False

data_handler_config: &data_handler_config
    start_time: 2010-01-01
    end_time: 2021-01-22
    fit_start_time: 2010-01-01
    fit_end_time: 2015-12-31
    instruments: *market
    filter_pipe: [*filter]
```

To know more about Filter, please refer to [Filter API](#).

Reference

To know more about Data API, please refer to [Data API](#).

1.8.4 Data Loader

Data Loader in Qlib is designed to load raw data from the original data source. It will be loaded and used in the Data Handler module.

QlibDataLoader

The QlibDataLoader class in Qlib is such an interface that allows users to load raw data from the Qlib data source.

StaticDataLoader

The StaticDataLoader class in Qlib is such an interface that allows users to load raw data from file or as provided.

Interface

Here are some interfaces of the QlibDataLoader class:

class qlib.data.dataset.loader.**DataLoader**

DataLoader is designed for loading raw data from original data source.

load(*instruments*, *start_time*=None, *end_time*=None) → pandas.core.frame.DataFrame
load the data as pd.DataFrame.

Example of the data (The multi-index of the columns is optional.):

		feature				
	label	\$close	\$volume	Ref(\$close, 1)	Mean ()
→	→\$close, 3)	\$high-\$low	LABEL0			
datetime	instrument					
2010-01-04	SH600000	81.807068	17145150.0	83.737389		
→83.016739	2.741058	0.0032				
	SH600004	13.313329	11800983.0	13.313329		
→13.317701	0.183632	0.0042				
	SH600005	37.796539	12231662.0	38.258602		
→37.919757	0.970325	0.0289				

Parameters

- **instruments** (*str or dict*) – it can either be the market name or the config file of instruments generated by InstrumentProvider.
- **start_time** (*str*) – start of the time range.
- **end_time** (*str*) – end of the time range.

Returns data load from the under layer source

Return type pd.DataFrame

API

To know more about Data Loader, please refer to [Data Loader API](#).

1.8.5 Data Handler

The Data Handler module in Qlib is designed to handle those common data processing methods which will be used by most of the models.

Users can use Data Handler in an automatic workflow by qrun, refer to [Workflow: Workflow Management](#) for more details.

DataHandlerLP

In addition to use Data Handler in an automatic workflow with qrun, Data Handler can be used as an independent module, by which users can easily preprocess data (standardization, remove NaN, etc.) and build datasets.

In order to achieve so, Qlib provides a base class `qlib.data.dataset.DataHandlerLP`. The core idea of this class is that: we will have some learnable Processors which can learn the parameters of data processing(e.g., parameters for zscore normalization). When new data comes in, these *trained* Processors can then process the new data and thus processing real-time data in an efficient way becomes possible. More information about Processors will be listed in the next subsection.

Interface

Here are some important interfaces that DataHandlerLP provides:

```
class qlib.data.dataset.handler.DataHandlerLP(instruments=None,
                                              start_time=None,          end_time=None,
                                              data_loader: Union[dict, str,
qnib.data.dataset.loader.DataLoader]
                                              = None, infer_processors: List[T] =
[], learn_processors: List[T] = [], shared_processors: List[T] = [],
                                              process_type='append', drop_raw=False,
                                              **kwargs)
```

DataHandler with (L)earnable (P)rocessor

Tips to improving the performance of data handler - To reduce the memory cost

- `drop_raw=True`: this will modify the data inplace on raw data;

```
__init__(instruments=None, start_time=None, end_time=None, data_loader: Union[dict,
str, qlib.data.dataset.loader.DataLoader] = None, infer_processors: List[T] =
[], learn_processors: List[T] = [], shared_processors: List[T] = [],
drop_raw=False, **kwargs)
```

Parameters

- **infer_processors** (*list*) –
 - list of <description info> of processors to generate data for inference
 - example of <description info>:
- **learn_processors** (*list*) – similar to infer_processors, but for generating data for learning models
- **process_type** (*str*) – PTYPE_I = ‘independent’
 - self._infer will processed by infer_processors
 - self._learn will be processed by learn_processors

PTYPE_A = ‘append’

- self._infer will processed by infer_processors
- self._learn will be processed by infer_processors + learn_processors
 - * (e.g. self._infer processed by learn_processors)
- **drop_raw** (*bool*) – Whether to drop the raw data

fit()

fit data without processing the data

fit_process_data()

fit and process data

The input of the *fit* will be the output of the previous processor

process_data (*with_fit: bool = False*)

process_data data. Fun *processor.fit* if necessary

Notation: (data) [processor]

```
# data processing flow of self.process_type == DataHandlerLP.PTYPE_I (self._data)-[shared_processors]-(_shared_df)-[learn_processors]-(_learn_df)
-[infer_processors]-(_infer_df)
```

```
# data processing flow of self.process_type == DataHandlerLP.PTYPE_A (self._data)-[shared_processors]-(_shared_df)-[infer_processors]-(_infer_df)-[learn_processors]-(_learn_df)
```

Parameters with_fit (*bool*) – The input of the *fit* will be the output of the previous processor

config (*processor_kwargs: dict = None, **kwargs*)

configuration of data. # what data to be loaded from data source

This method will be used when loading pickled handler from dataset. The data will be initialized with different time range.

setup_data (*init_type: str = 'fit_seq', **kwargs*)

Set up the data in case of running initialization for multiple time

Parameters

- **init_type** (*str*) – The type *IT_** listed above.
- **enable_cache** (*bool*) – default value is false:
 - if *enable_cache* == True:

the processed data will be saved on disk, and handler will load the cached data from the disk directly when we call *init* next time

fetch (*selector: Union[pandas._libs.tslibs.timestamps.Timestamp, slice, str] = slice(None, None, None), level: Union[str, int] = 'datetime', col_set='__all', data_key: str = 'infer', proc_func: Callable = None*) → *pandas.core.frame.DataFrame*

fetch data from underlying data source

Parameters

- **selector** (*Union[pd.Timestamp, slice, str]*) – describe how to select data by index.
- **level** (*Union[str, int]*) – which index level to select the data.
- **col_set** (*str*) – select a set of meaningful columns.(e.g. features, columns).

- **data_key** (*str*) – the data to fetch: DK_*.
- **proc_func** (*Callable*) – please refer to the doc of DataHandler.fetch

Returns

Return type pd.DataFrame

get_cols (*col_set='__all'*, *data_key: str = 'infer'*) → list
get the column names

Parameters

- **col_set** (*str*) – select a set of meaningful columns.(e.g. features, columns).
- **data_key** (*str*) – the data to fetch: DK_*.

Returns list of column names

Return type list

If users want to load features and labels by config, users can define a new handler and call the static method `parse_config_to_fields` of `qlib.contrib.data.handler.Alpha158`.

Also, users can pass `qlib.contrib.data.processor.ConfigSectionProcessor` that provides some preprocess methods for features defined by config into the new handler.

Processor

The Processor module in Qlib is designed to be learnable and it is responsible for handling data processing such as *normalization* and *drop none/nan features/labels*.

Qlib provides the following Processors:

- DropnaProcessor: *processor* that drops N/A features.
- DropnaLabel: *processor* that drops N/A labels.
- TanhProcess: *processor* that uses *tanh* to process noise data.
- ProcessInf: *processor* that handles infinity values, it will be replaces by the mean of the column.
- Fillna: *processor* that handles N/A values, which will fill the N/A value by 0 or other given number.
- MinMaxNorm: *processor* that applies min-max normalization.
- ZscoreNorm: *processor* that applies z-score normalization.
- RobustZScoreNorm: *processor* that applies robust z-score normalization.
- CSZScoreNorm: *processor* that applies cross sectional z-score normalization.
- CSRankNorm: *processor* that applies cross sectional rank normalization.
- CSZFillna: *processor* that fills N/A values in a cross sectional way by the mean of the column.

Users can also create their own *processor* by inheriting the base class of `Processor`. Please refer to the implementation of all the processors for more information ([Processor Link](#)).

To know more about `Processor`, please refer to [Processor API](#).

Example

Data Handler can be run with qrun by modifying the configuration file, and can also be used as a single module. Know more about how to run Data Handler with qrun, please refer to [Workflow: Workflow Management](#). Qlib provides implemented data handler *Alpha158*. The following example shows how to run *Alpha158* as a single module.

Note: Users need to initialize Qlib with *qlib.init* first, please refer to [initialization](#).

```
import qlib
from qlib.contrib.data.handler import Alpha158

data_handler_config = {
    "start_time": "2008-01-01",
    "end_time": "2020-08-01",
    "fit_start_time": "2008-01-01",
    "fit_end_time": "2014-12-31",
    "instruments": "csi300",
}

if __name__ == "__main__":
    qlib.init()
    h = Alpha158(**data_handler_config)

    # get all the columns of the data
    print(h.get_cols())

    # fetch all the labels
    print(h.fetch(col_set="label"))

    # fetch all the features
    print(h.fetch(col_set="feature"))
```

Note: In the *Alpha158*, Qlib uses the label *Ref(\$close, -2)/Ref(\$close, -1) - 1* that means the change from T+1 to T+2, rather than *Ref(\$close, -1)/\$close - 1*, of which the reason is that when getting the T day close price of a china stock, the stock can be bought on T+1 day and sold on T+2 day.

API

To know more about Data Handler, please refer to [Data Handler API](#).

1.8.6 Dataset

The Dataset module in Qlib aims to prepare data for model training and inferencing.

The motivation of this module is that we want to maximize the flexibility of different models to handle data that are suitable for themselves. This module gives the model the flexibility to process their data in a unique way. For instance, models such as GBDT may work well on data that contains *nan* or *None* value, while neural networks such as MLP will break down on such data.

If user's model need process its data in a different way, user could implement his own `Dataset` class. If the model's data processing is not special, `DatasetH` can be used directly.

The `DatasetH` class is the *dataset* with *Data Handler*. Here is the most important interface of the class:

```
class qlib.data.dataset.__init__.DatasetH(handler: Union[Dict[KT, VT], qlib.data.dataset.handler.DataHandler], segments: Dict[str, Tuple], **kwargs)
```

Dataset with Data(H)andler

User should try to put the data preprocessing functions into handler. Only following data processing functions should be placed in Dataset:

- The processing is related to specific model.
- The processing is related to data split.

```
__init__(handler: Union[Dict[KT, VT], qlib.data.dataset.handler.DataHandler], segments: Dict[str, Tuple], **kwargs)
```

Setup the underlying data.

Parameters

- **handler** (`Union[dict, DataHandler]`) – handler could be:
 - instance of `DataHandler`
 - config of `DataHandler`. Please refer to `DataHandler`
- **segments** (`dict`) – Describe the options to segment the data. Here are some examples:

```
config(handler_kwargs: dict = None, **kwargs)
```

Initialize the DatasetH

Parameters

- **handler_kwargs** (`dict`) – Config of `DataHandler`, which could include the following arguments:
 - arguments of `DataHandler.conf_data`, such as ‘instruments’, ‘start_time’ and ‘end_time’.
- **kwargs** (`dict`) – Config of `DatasetH`, such as
 - **segments** [`dict`] Config of segments which is same as ‘segments’ in `self.__init__`

```
setup_data(handler_kwargs: dict = None, **kwargs)
```

Setup the Data

Parameters `handler_kwargs` (`dict`) – init arguments of `DataHandler`, which could include the following arguments:

- `init_type` : Init Type of Handler
- `enable_cache` : whether to enable cache

```
prepare(segments: Union[List[str], Tuple[str], str, slice], col_set='__all', data_key='infer', **kwargs) → Union[List[pandas.core.frame.DataFrame], pandas.core.frame.DataFrame]
```

Prepare the data for learning and inference.

Parameters

- **segments** (`Union[List[Text], Tuple[Text], Text, slice]`) – Describe the scope of the data to be prepared. Here are some examples:
 - ‘train’

- [‘train’, ‘valid’]
- **col_set** (*str*) – The col_set will be passed to self.handler when fetching data.
- **data_key** (*str*) – The data to fetch: DK_* Default is DK_I, which indicate fetching data for **inference**.
- **kwargs** –

The parameters that kwargs may contain:

fit_col [*str*] It only exists in TSDatasetH, can be used to add a column of data(True or False) to filter data. This parameter is only supported when it is an instance of TSDatasetH.

Returns

Return type Union[List[pd.DataFrame], pd.DataFrame]

Raises NotImplementedError:

API

To know more about Dataset, please refer to [Dataset API](#).

1.8.7 Cache

Cache is an optional module that helps accelerate providing data by saving some frequently-used data as cache file. Qlib provides a *Memcache* class to cache the most-frequently-used data in memory, an inheritable *ExpressionCache* class, and an inheritable *DatasetCache* class.

Global Memory Cache

Memcache is a global memory cache mechanism that composes of three *MemCacheUnit* instances to cache **Calendar**, **Instruments**, and **Features**. The *MemCache* is defined globally in *cache.py* as *H*. Users can use *H[‘c’]*, *H[‘i’]*, *H[‘f’]* to get/set *memcache*.

```
class qlib.data.cache.MemCacheUnit (*args, **kwargs)
    Memory Cache Unit.

    __init__ (*args, **kwargs)
        Initialize self. See help(type(self)) for accurate signature.

    limited
        whether memory cache is limited

class qlib.data.cache.MemCache (mem_cache_size_limit=None, limit_type='length')
    Memory cache.

    __init__ (mem_cache_size_limit=None, limit_type='length')
```

Parameters

- **mem_cache_size_limit** (*cache max size*) –
- **limit_type** (*length or sizeof; length(call fun: len), size(call fun: sys.getsizeof)*) –

ExpressionCache

ExpressionCache is a cache mechanism that saves expressions such as `Mean($close, 5)`. Users can inherit this base class to define their own cache mechanism that saves expressions according to the following steps.

- Override `self._uri` method to define how the cache file path is generated
- Override `self._expression` method to define what data will be cached and how to cache it.

The following shows the details about the interfaces:

```
class qlib.data.cache.ExpressionCache(provider)
    Expression cache mechanism base class.
```

This class is used to wrap expression provider with self-defined expression cache mechanism.

Note: Override the `_uri` and `_expression` method to create your own expression cache mechanism.

```
expression(instrument, field, start_time, end_time, freq)
    Get expression data.
```

Note: Same interface as `expression` method in expression provider

```
update(cache_uri: Union[str, pathlib.Path], freq: str = 'day')
    Update expression cache to latest calendar.
```

Override this method to define how to update expression cache corresponding to users' own cache mechanism.

Parameters

- `cache_uri (str or Path)` – the complete uri of expression cache file (include dir path).
- `freq (str)` –

Returns 0(successful update)/ 1(no need to update)/ 2(update failure).

Return type int

QLib has currently provided implemented disk cache `DiskExpressionCache` which inherits from `ExpressionCache` . The expressions data will be stored in the disk.

DatasetCache

DatasetCache is a cache mechanism that saves datasets. A certain dataset is regulated by a stock pool configuration (or a series of instruments, though not recommended), a list of expressions or static feature fields, the start time, and end time for the collected features and the frequency. Users can inherit this base class to define their own cache mechanism that saves datasets according to the following steps.

- Override `self._uri` method to define how their cache file path is generated
- Override `self._expression` method to define what data will be cached and how to cache it.

The following shows the details about the interfaces:

```
class qlib.data.cache.DatasetCache(provider)
    Dataset cache mechanism base class.
```

This class is used to wrap dataset provider with self-defined dataset cache mechanism.

Note: Override the `_uri` and `_dataset` method to create your own dataset cache mechanism.

dataset (`instruments`, `fields`, `start_time=None`, `end_time=None`, `freq='day'`, `disk_cache=1`,
`inst_processors=[]`)
Get feature dataset.

Note: Same interface as `dataset` method in dataset provider

Note: The server use redis_lock to make sure read-write conflicts will not be triggered
but client readers are not considered.

update (`cache_uri: Union[str, pathlib.Path]`, `freq: str = 'day'`)
Update dataset cache to latest calendar.

Override this method to define how to update dataset cache corresponding to users' own cache mechanism.

Parameters

- **cache_uri** (`str or Path`) – the complete uri of dataset cache file (include dir path).
- **freq** (`str`) –

Returns 0(successful update)/ 1(no need to update)/ 2(update failure)

Return type int

static cache_to_origin_data (`data, fields`)
cache data to origin data

Parameters

- **data** – `pd.DataFrame`, cache data.
- **fields** – feature fields.

Returns `pd.DataFrame`.

static normalize_uri_args (`instruments, fields, freq`)
normalize uri args

Qlib has currently provided implemented disk cache `DiskDatasetCache` which inherits from `DatasetCache`. The datasets' data will be stored in the disk.

1.8.8 Data and Cache File Structure

We've specially designed a file structure to manage data and cache, please refer to the [File storage design section in Qlib paper](#) for detailed information. The file structure of data and cache is listed as follows.

```
- data/
    [raw data] updated by data providers
    - calendars/
        - day.txt
    - instruments/
        - all.txt
```

(continues on next page)

(continued from previous page)

```

- csi500.txt
- ...
- features/
  - sh600000/
    - open.day.bin
    - close.day.bin
    - ...
    - ...
[cached data] updated when raw data is updated
- calculated features/
  - sh600000/
    - [hash(instrument, field_expression, freq)]
      - all-time expression -cache data file
      - .meta : an assorted meta file recording the instrument name, field_
      ↪name, freq, and visit times
    - ...
- cache/
  - [hash(stockpool_config, field_expression_list, freq)]
    - all-time Dataset-cache data file
    - .meta : an assorted meta file recording the stockpool config, field_
    ↪names and visit times
    - .index : an assorted index file recording the line index of all_
    ↪calendars
    - ...

```

1.9 Forecast Model: Model Training & Prediction

1.9.1 Introduction

Forecast Model is designed to make the *prediction score* about stocks. Users can use the Forecast Model in an automatic workflow by qrun, please refer to [Workflow: Workflow Management](#).

Because the components in Qlib are designed in a loosely-coupled way, Forecast Model can be used as an independent module also.

1.9.2 Base Class & Interface

Qlib provides a base class `qlib.model.base.Model` from which all models should inherit.

The base class provides the following interfaces:

```
class qlib.model.base.Model
  Learnable Models
  fit (dataset: qlib.data.dataset.Dataset)
    Learn model from the base model
```

Note: The attribute names of learned model should *not* start with ‘_’. So that the model could be dumped to disk.

The following code example shows how to retrieve `x_train`, `y_train` and `w_train` from the `dataset`:

```

# get features and labels
df_train, df_valid = dataset.prepare(
    ["train", "valid"], col_set=["feature", "label"], data_
    ↪key=DataHandlerLP.DK_L
)
x_train, y_train = df_train["feature"], df_train["label"]
x_valid, y_valid = df_valid["feature"], df_valid["label"]

# get weights
try:
    wdf_train, wdf_valid = dataset.prepare(["train", "valid"], col_
    ↪set=[ "weight" ],
                                         data_key=DataHandlerLP.DK_
    ↪L)
    w_train, w_valid = wdf_train["weight"], wdf_valid["weight"]
except KeyError as e:
    w_train = pd.DataFrame(np.ones_like(y_train.values), index=y_
    ↪train.index)
    w_valid = pd.DataFrame(np.ones_like(y_valid.values), index=y_
    ↪valid.index)

```

Parameters `dataset` (`Dataset`) – dataset will generate the processed data from model training.

predict (`dataset: qlib.data.dataset.Dataset, segment: Union[str, slice] = 'test'`) → object
give prediction given Dataset

Parameters

- `dataset` (`Dataset`) – dataset will generate the processed dataset from model training.
- `segment` (`Text or slice`) – dataset will use this segment to prepare data. (default=`test`)

Returns

Return type Prediction results with certain type such as `pandas.Series`.

Qlib also provides a base class `qlib.model.base.ModelIFT`, which includes the method for finetuning the model.

For other interfaces such as `finetune`, please refer to [Model API](#).

1.9.3 Example

Qlib's *Model Zoo* includes models such as LightGBM, MLP, LSTM, etc.. These models are treated as the baselines of Forecast Model. The following steps show how to run “LightGBM” as an independent module.

- Initialize Qlib with `qlib.init` first, please refer to [Initialization](#).
- **Run the following code to get the prediction score `pred_score`**

```

from qlib.contrib.model.gbdt import LGBModel
from qlib.contrib.data.handler import Alpha158
from qlib.utils import init_instance_by_config, flatten_dict
from qlib.workflow import R
from qlib.workflow.record_temp import SignalRecord, PortAnaRecord

```

(continues on next page)

(continued from previous page)

```

market = "csi300"
benchmark = "SH000300"

data_handler_config = {
    "start_time": "2008-01-01",
    "end_time": "2020-08-01",
    "fit_start_time": "2008-01-01",
    "fit_end_time": "2014-12-31",
    "instruments": market,
}

task = {
    "model": {
        "class": "LGBModel",
        "module_path": "qlib.contrib.model.gbdt",
        "kwargs": {
            "loss": "mse",
            "colsample_bytree": 0.8879,
            "learning_rate": 0.0421,
            "subsample": 0.8789,
            "lambda_l1": 205.6999,
            "lambda_l2": 580.9768,
            "max_depth": 8,
            "num_leaves": 210,
            "num_threads": 20,
        },
    },
    "dataset": {
        "class": "DatasetH",
        "module_path": "qlib.data.dataset",
        "kwargs": {
            "handler": {
                "class": "Alpha158",
                "module_path": "qlib.contrib.data.handler",
                "kwargs": data_handler_config,
            },
            "segments": {
                "train": ("2008-01-01", "2014-12-31"),
                "valid": ("2015-01-01", "2016-12-31"),
                "test": ("2017-01-01", "2020-08-01"),
            },
        },
    },
}

# model initiaiton
model = init_instance_by_config(task["model"])
dataset = init_instance_by_config(task["dataset"])

# start exp
with R.start(experiment_name="workflow"):
    # train
    R.log_params(**flatten_dict(task))
    model.fit(dataset)

    # prediction
    recorder = R.get_recorder()

```

(continues on next page)

(continued from previous page)

```
sr = SignalRecord(model, dataset, recorder)
sr.generate()
```

Note: *Alpha158* is the data handler provided by Qlib, please refer to [Data Handler](#). *SignalRecord* is the *Record Template* in Qlib, please refer to [Workflow](#).

Also, the above example has been given in `examples/train_backtest_analyze.ipynb`.

1.9.4 Custom Model

Qlib supports custom models. If users are interested in customizing their own models and integrating the models into Qlib, please refer to [Custom Model Integration](#).

1.9.5 API

Please refer to [Model API](#).

1.10 Portfolio Strategy: Portfolio Management

1.10.1 Introduction

Portfolio Strategy is designed to adopt different portfolio strategies, which means that users can adopt different algorithms to generate investment portfolios based on the prediction scores of the Forecast Model. Users can use the Portfolio Strategy in an automatic workflow by Workflow module, please refer to [Workflow: Workflow Management](#).

Because the components in Qlib are designed in a loosely-coupled way, Portfolio Strategy can be used as an independent module also.

Qlib provides several implemented portfolio strategies. Also, Qlib supports custom strategy, users can customize strategies according to their own needs.

1.10.2 Base Class & Interface

BaseStrategy

Qlib provides a base class `qlib.contrib.strategy.BaseStrategy`. All strategy classes need to inherit the base class and implement its interface.

- **`get_risk_degree`** Return the proportion of your total value you will use in investment. Dynamically risk_degree will result in Market timing.
- **`generate_order_list`** Return the order list.

Users can inherit `BaseStrategy` to customize their strategy class.

WeightStrategyBase

Qlib also provides a class `qlib.contrib.strategy.WeightStrategyBase` that is a subclass of `BaseStrategy`.

`WeightStrategyBase` only focuses on the target positions, and automatically generates an order list based on positions. It provides the `generate_target_weight_position` interface.

- `generate_target_weight_position`

- According to the current position and trading date to generate the target position. The cash is not considered in the output weight distribution.
- Return the target position.

Note: Here the *target position* means the target percentage of total assets.

`WeightStrategyBase` implements the interface `generate_order_list`, whose processions is as follows.

- Call `generate_target_weight_position` method to generate the target position.
- Generate the target amount of stocks from the target position.
- Generate the order list from the target amount

Users can inherit `WeightStrategyBase` and implement the interface `generate_target_weight_position` to customize their strategy class, which only focuses on the target positions.

1.10.3 Implemented Strategy

Qlib provides a implemented strategy classes named `TopkDropoutStrategy`.

TopkDropoutStrategy


`TopkDropoutStrategy` is a subclass of `BaseStrategy` and implement the interface `generate_order_list` whose process is as follows.

- Adopt the Topk-Drop algorithm to calculate the target amount of each stock

Note: Topk-Drop algorithm

- *Topk*: The number of stocks held
- *Drop*: The number of stocks sold on each trading day

Currently, the number of held stocks is *Topk*. On each trading day, the *Drop* number of held stocks with the worst *prediction score* will be sold, and the same number of unheld stocks with the best *prediction score* will be bought.

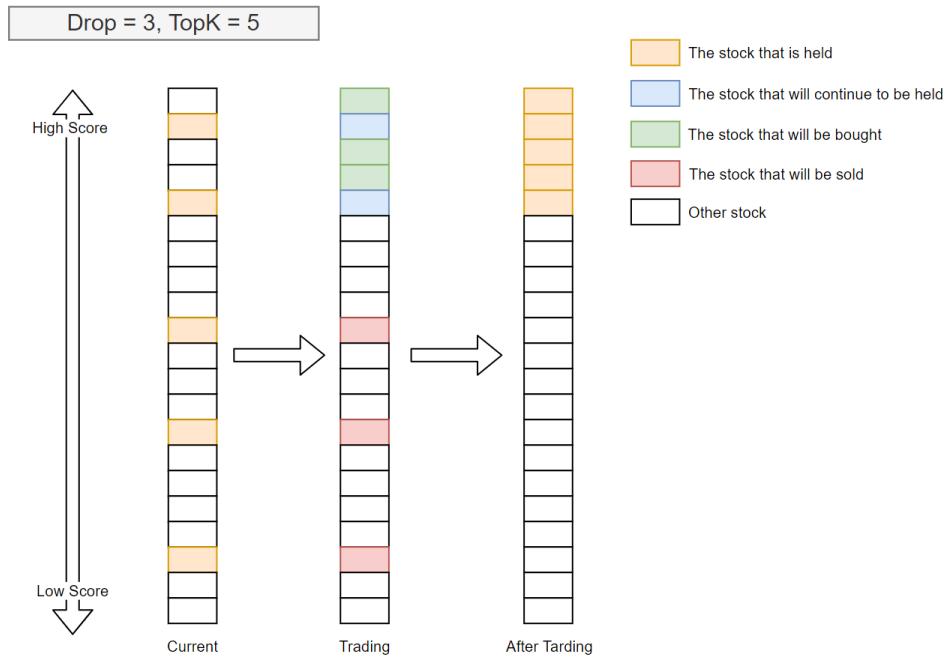

TopkDrop algorithm sells *Drop* stocks every trading day, which guarantees a fixed turnover rate.

- Generate the order list from the target amount

1.10.4 Usage & Example

Portfolio Strategy can be specified in the Intraday Trading(Backtest), the example is as follows.

```
from qlib.contrib.strategy.strategy import TopkDropoutStrategy
from qlib.contrib.evaluate import backtest
STRATEGY_CONFIG = {
    "topk": 50,
    "n_drop": 5,
}
BACKTEST_CONFIG = {
    "verbose": False,
    "limit_threshold": 0.095,
    "account": 1000000000,
    "benchmark": BENCHMARK,
    "deal_price": "close",
    "open_cost": 0.0005,
    "close_cost": 0.0015,
    "min_cost": 5,
}
# use default strategy
strategy = TopkDropoutStrategy(**STRATEGY_CONFIG)

# pred_score is the `prediction score` output by Model
report_normal, positions_normal = backtest(
```

(continues on next page)

(continued from previous page)

```
    pred_score, strategy=strategy, **BACKTEST_CONFIG
)
```

To know more about the *prediction score* `pred_score` output by Forecast Model, please refer to [Forecast Model: Model Training & Prediction](#).

To know more about Intraday Trading, please refer to [Intraday Trading: Model&Strategy Testing](#).

1.10.5 Reference

To know more about Portfolio Strategy, please refer to [Strategy API](#).

1.11 Intraday Trading: Model&Strategy Testing

1.11.1 Introduction

Intraday Trading is designed to test models and strategies, which help users to check the performance of a custom model/strategy.

Note: Intraday Trading uses Order Executor to trade and execute orders output by Portfolio Strategy. Order Executor is a component in [Qlib Framework](#), which can execute orders. VWAP Executor and Close Executor is supported by Qlib now. In the future, Qlib will support HighFreq Executor also.

1.11.2 Example

Users need to generate a *prediction score* '(a pandas DataFrame) with `MultiIndex<instrument, datetime>` and a 'score' column. And users need to assign a strategy used in backtest, if strategy is not assigned, a `TopkDropoutStrategy` strategy with (`topk=50, n_drop=5, risk_degree=0.95, limit_threshold=0.0095`) will be used. If Strategy module is not users' interested part, `TopkDropoutStrategy` is enough.

The simple example of the default strategy is as follows.

```
from qlib.contrib.evaluate import backtest
# pred_score is the prediction score
report, positions = backtest(pred_score, topk=50, n_drop=0.5, verbose=False, limit_
    ↴threshold=0.0095)
```

To know more about backtesting with a specific Strategy, please refer to [Portfolio Strategy](#).

To know more about the prediction score `pred_score` output by Forecast Model, please refer to [Forecast Model: Model Training & Prediction](#).

Prediction Score

The *prediction score* is a pandas DataFrame. Its index is `<datetime(pd.Timestamp), instrument(str)>` and it must contains a `score` column.

A prediction sample is shown as follows.

datetime	instrument	score
2019-01-04	SH600000	-0.505488
2019-01-04	SZ002531	-0.320391
2019-01-04	SZ000999	0.583808
2019-01-04	SZ300569	0.819628
2019-01-04	SZ001696	-0.137140

2019-04-30	SZ000996	-1.027618
2019-04-30	SH603127	0.225677
2019-04-30	SH603126	0.462443
2019-04-30	SH603133	-0.302460
2019-04-30	SZ300760	-0.126383

Forecast Model module can make predictions, please refer to Forecast Model: Model Training & Prediction.

Backtest Result

The backtest results are in the following form:

		risk
excess_return_without_cost	mean	0.000605
	std	0.005481
	annualized_return	0.152373
	information_ratio	1.751319
	max_drawdown	-0.059055
excess_return_with_cost	mean	0.000410
	std	0.005478
	annualized_return	0.103265
	information_ratio	1.187411
	max_drawdown	-0.075024

- **excess_return_without_cost**
 - **mean** Mean value of the *CAR* (cumulative abnormal return) without cost
 - **std** The *Standard Deviation* of *CAR* (cumulative abnormal return) without cost.
 - **annualized_return** The *Annualized Rate* of *CAR* (cumulative abnormal return) without cost.
 - **information_ratio** The *Information Ratio* without cost. please refer to [Information Ratio – IR](#).
 - **max_drawdown** The *Maximum Drawdown* of *CAR* (cumulative abnormal return) without cost, please refer to [Maximum Drawdown \(MDD\)](#).
- **excess_return_with_cost**
 - **mean** Mean value of the *CAR* (cumulative abnormal return) series with cost
 - **std** The *Standard Deviation* of *CAR* (cumulative abnormal return) series with cost.
 - **annualized_return** The *Annualized Rate* of *CAR* (cumulative abnormal return) with cost.
 - **information_ratio** The *Information Ratio* with cost. please refer to [Information Ratio – IR](#).
 - **max_drawdown** The *Maximum Drawdown* of *CAR* (cumulative abnormal return) with cost, please refer to [Maximum Drawdown \(MDD\)](#).

1.11.3 Reference

To know more about Intraday Trading, please refer to [Intraday Trading](#).

1.12 Qlib Recorder: Experiment Management

1.12.1 Introduction

Qlib contains an experiment management system named `QlibRecorder`, which is designed to help users handle experiment and analyse results in an efficient way.

There are three components of the system:

- **ExperimentManager** a class that manages experiments.
- **Experiment** a class of experiment, and each instance of it is responsible for a single experiment.
- **Recorder** a class of recorder, and each instance of it is responsible for a single run.

Here is a general view of the structure of the system:

This experiment management system defines a set of interface and provided a concrete implementation `MLflowExpManager`, which is based on the machine learning platform: `MLflow` ([link](#)).

If users set the implementation of `ExpManager` to be `MLflowExpManager`, they can use the command `mlflow ui` to visualize and check the experiment results. For more information, please refer to the related documents [here](#).

1.12.2 Qlib Recorder

`QlibRecorder` provides a high level API for users to use the experiment management system. The interfaces are wrapped in the variable `R` in `Qlib`, and users can directly use `R` to interact with the system. The following command shows how to import `R` in Python:

```
from qlib.workflow import R
```

`QlibRecorder` includes several common API for managing *experiments* and *recorders* within a workflow. For more available APIs, please refer to the following section about *Experiment Manager*, *Experiment* and *Recorder*.

Here are the available interfaces of `QlibRecorder`:

```
class qlib.workflow.__init__.QlibRecorder(exp_manager)
    A global system that helps to manage the experiments.

    __init__(exp_manager)
        Initialize self. See help(type(self)) for accurate signature.

    start(*, experiment_id: Optional[str] = None, experiment_name: Optional[str] = None, recorder_id: Optional[str] = None, recorder_name: Optional[str] = None, uri: Optional[str] = None, resume: bool = False)
        Method to start an experiment. This method can only be called within a Python's with statement. Here is the example code:
```

```
# start new experiment and recorder
with R.start(experiment_name='test', recorder_name='recorder_1'):
    model.fit(dataset)
    R.log...
    ... # further operations

# resume previous experiment and recorder
with R.start(experiment_name='test', recorder_name='recorder_1', ↴resume=True): # if users want to resume recorder, they have to specify the ↴exact same name for experiment and recorder.
    ... # further operations
```

Parameters

- **experiment_id** (*str*) – id of the experiment one wants to start.
- **experiment_name** (*str*) – name of the experiment one wants to start.
- **recorder_id** (*str*) – id of the recorder under the experiment one wants to start.
- **recorder_name** (*str*) – name of the recorder under the experiment one wants to start.
- **uri** (*str*) – The tracking uri of the experiment, where all the artifacts/metrics etc. will be stored. The default uri is set in the qlib.config. Note that this uri argument will not change the one defined in the config file. Therefore, the next time when users call this function in the same experiment, they have to also specify this argument with the same value. Otherwise, inconsistent uri may occur.
- **resume** (*bool*) – whether to resume the specific recorder with given name under the given experiment.

```
start_exp(*,
            experiment_id=None, experiment_name=None, recorder_id=None,
            recorder_name=None, uri=None, resume=False)
```

Lower level method for starting an experiment. When use this method, one should end the experiment manually and the status of the recorder may not be handled properly. Here is the example code:

```
R.start_exp(experiment_name='test', recorder_name='recorder_1')
... # further operations
R.end_exp('FINISHED') or R.end_exp(Recorder.STATUS_S)
```

Parameters

- **experiment_id** (*str*) – id of the experiment one wants to start.
- **experiment_name** (*str*) – the name of the experiment to be started
- **recorder_id** (*str*) – id of the recorder under the experiment one wants to start.
- **recorder_name** (*str*) – name of the recorder under the experiment one wants to start.
- **uri** (*str*) – the tracking uri of the experiment, where all the artifacts/metrics etc. will be stored. The default uri are set in the qlib.config.
- **resume** (*bool*) – whether to resume the specific recorder with given name under the given experiment.

Returns

Return type An experiment instance being started.

```
end_exp(recorder_status='FINISHED')
```

Method for ending an experiment manually. It will end the current active experiment, as well as its active recorder with the specified *status* type. Here is the example code of the method:

```
R.start_exp(experiment_name='test')
... # further operations
R.end_exp('FINISHED') or R.end_exp(Recorder.STATUS_S)
```

Parameters **status** (*str*) – The status of a recorder, which can be SCHEDULED, RUNNING, FINISHED, FAILED.

search_records (*experiment_ids*, ***kwargs*)

Get a pandas DataFrame of records that fit the search criteria.

The arguments of this function are not set to be rigid, and they will be different with different implementation of ExpManager in Qlib. Qlib now provides an implementation of ExpManager with mlflow, and here is the example code of the this method with the MLflowExpManager:

```
R.log_metrics(m=2.50, step=0)
records = R.search_runs([experiment_id], order_by=["metrics.m DESC"])
```

Parameters

- **experiment_ids** (*list*) – list of experiment IDs.
- **filter_string** (*str*) – filter query string, defaults to searching all runs.
- **run_view_type** (*int*) – one of enum values ACTIVE_ONLY, DELETED_ONLY, or ALL (e.g. in mlflow.entities.ViewType).
- **max_results** (*int*) – the maximum number of runs to put in the dataframe.
- **order_by** (*list*) – list of columns to order by (e.g., “metrics.rmse”).

Returns

- A pandas.DataFrame of records, where each metric, parameter, and tag are expanded into their own columns named metrics., params.*, and tags.** respectively. For records that don't have a particular metric, parameter, or tag, their value will be (NumPy) Nan, None, or None respectively.

list_experiments()

Method for listing all the existing experiments (except for those being deleted.)

```
exps = R.list_experiments()
```

Returns

Return type A dictionary (name -> experiment) of experiments information that being stored.

list_recorders (*experiment_id=None*, *experiment_name=None*)

Method for listing all the recorders of experiment with given id or name.

If user doesn't provide the id or name of the experiment, this method will try to retrieve the default experiment and list all the recorders of the default experiment. If the default experiment doesn't exist, the method will first create the default experiment, and then create a new recorder under it. (More information about the default experiment can be found [here](#)).

Here is the example code:

```
recorders = R.list_recorders(experiment_name='test')
```

Parameters

- **experiment_id** (*str*) – id of the experiment.
- **experiment_name** (*str*) – name of the experiment.

Returns

Return type A dictionary (id -> recorder) of recorder information that being stored.

```
get_exp(*, experiment_id=None, experiment_name=None, create: bool = True) → qlib.workflow.exp.Experiment
```

Method for retrieving an experiment with given id or name. Once the *create* argument is set to True, if no valid experiment is found, this method will create one for you. Otherwise, it will only retrieve a specific experiment or raise an Error.

- If ‘*create*’ is True:
 - If *active experiment* exists:
 - * no id or name specified, return the active experiment.
 - * if id or name is specified, return the specified experiment. If no such exp found, create a new experiment with given id or name.
 - If *active experiment* not exists:
 - * no id or name specified, create a default experiment, and the experiment is set to be active.
 - * if id or name is specified, return the specified experiment. If no such exp found, create a new experiment with given name or the default experiment.
- Else If ‘*create*’ is False:
 - If “*active experiment*” exists:
 - * no id or name specified, return the active experiment.
 - * if id or name is specified, return the specified experiment. If no such exp found, raise Error.
 - If *active experiment* not exists:
 - * no id or name specified. If the default experiment exists, return it, otherwise, raise Error.
 - * if id or name is specified, return the specified experiment. If no such exp found, raise Error.

Here are some use cases:

```
# Case 1
with R.start('test'):
    exp = R.get_exp()
    recorders = exp.list_recorders()

# Case 2
with R.start('test'):
    exp = R.get_exp(experiment_name='test1')

# Case 3
exp = R.get_exp() -> a default experiment.

# Case 4
exp = R.get_exp(experiment_name='test')

# Case 5
exp = R.get_exp(create=False) -> the default experiment if exists.
```

Parameters

- **experiment_id** (*str*) – id of the experiment.
- **experiment_name** (*str*) – name of the experiment.

- **create** (*boolean*) – an argument determines whether the method will automatically create a new experiment according to user's specification if the experiment hasn't been created before.

Returns

Return type An experiment instance with given id or name.

delete_exp (*experiment_id=None, experiment_name=None*)

Method for deleting the experiment with given id or name. At least one of id or name must be given, otherwise, error will occur.

Here is the example code:

```
R.delete_exp(experiment_name='test')
```

Parameters

- **experiment_id** (*str*) – id of the experiment.
- **experiment_name** (*str*) – name of the experiment.

get_uri()

Method for retrieving the uri of current experiment manager.

Here is the example code:

```
uri = R.get_uri()
```

Returns

Return type The uri of current experiment manager.

set_uri (*uri: Optional[str]*)

Method to reset the current uri of current experiment manager.

get_recorder (*, *recorder_id=None, recorder_name=None, experiment_id=None, experiment_name=None*) → qlib.workflow.recorder.Recorder

Method for retrieving a recorder.

- If *active recorder* exists:
 - no id or name specified, return the active recorder.
 - if id or name is specified, return the specified recorder.
- If *active recorder* not exists:
 - no id or name specified, raise Error.
 - if id or name is specified, and the corresponding experiment_name must be given, return the specified recorder. Otherwise, raise Error.

The recorder can be used for further process such as *save_object*, *load_object*, *log_params*, *log_metrics*, etc.

Here are some use cases:

```
# Case 1
with R.start('test'):
    recorder = R.get_recorder()
```

(continues on next page)

(continued from previous page)

```

# Case 2
with R.start('test'):
    recorder = R.get_recorder(recorder_id='2e7a4efd66574fa49039e00ffaefa99d')

# Case 3
recorder = R.get_recorder() -> Error

# Case 4
recorder = R.get_recorder(recorder_id='2e7a4efd66574fa49039e00ffaefa99d') ->_
->Error

# Case 5
recorder = R.get_recorder(recorder_id='2e7a4efd66574fa49039e00ffaefa99d',_
->experiment_name='test')

```

Parameters

- **recorder_id** (*str*) – id of the recorder.
- **recorder_name** (*str*) – name of the recorder.
- **experiment_name** (*str*) – name of the experiment.

Returns

Return type A recorder instance.

delete_recorder (*recorder_id=None, recorder_name=None*)

Method for deleting the recorders with given id or name. At least one of id or name must be given, otherwise, error will occur.

Here is the example code:

```
R.delete_recorder(recorder_id='2e7a4efd66574fa49039e00ffaefa99d')
```

Parameters

- **recorder_id** (*str*) – id of the experiment.
- **recorder_name** (*str*) – name of the experiment.

save_objects (*local_path=None, artifact_path=None, **kwargs*)

Method for saving objects as artifacts in the experiment to the uri. It supports either saving from a local file/directory, or directly saving objects. User can use valid python's keywords arguments to specify the object to be saved as well as its name (name: value).

- If *active recorder* exists: it will save the objects through the active recorder.
- If *active recorder* not exists: the system will create a default experiment, and a new recorder and save objects under it.

Note: If one wants to save objects with a specific recorder. It is recommended to first get the specific recorder through *get_recorder* API and use the recorder the save objects. The supported arguments are the same as this method.

Here are some use cases:

```
# Case 1
with R.start('test'):
    pred = model.predict(dataset)
    R.save_objects(**{"pred.pkl": pred}, artifact_path='prediction')

# Case 2
with R.start('test'):
    R.save_objects(local_path='results/pred.pkl')
```

Parameters

- **local_path** (*str*) – if provided, them save the file or directory to the artifact URI.
- **artifact_path** (*str*) – the relative path for the artifact to be stored in the URI.

load_object (*name: str*)

Method for loading an object from artifacts in the experiment in the uri.

log_params (***kwargs*)

Method for logging parameters during an experiment. In addition to using *R*, one can also log to a specific recorder after getting it with *get_recorder* API.

- If *active recorder* exists: it will log parameters through the active recorder.
- If *active recorder* not exists: the system will create a default experiment as well as a new recorder, and log parameters under it.

Here are some use cases:

```
# Case 1
with R.start('test'):
    R.log_params(learning_rate=0.01)

# Case 2
R.log_params(learning_rate=0.01)
```

Parameters argument (*keyword*) – name1=value1, name2=value2, ...

log_metrics (*step=None, **kwargs*)

Method for logging metrics during an experiment. In addition to using *R*, one can also log to a specific recorder after getting it with *get_recorder* API.

- If *active recorder* exists: it will log metrics through the active recorder.
- If *active recorder* not exists: the system will create a default experiment as well as a new recorder, and log metrics under it.

Here are some use cases:

```
# Case 1
with R.start('test'):
    R.log_metrics(train_loss=0.33, step=1)

# Case 2
R.log_metrics(train_loss=0.33, step=1)
```

Parameters argument (*keyword*) – name1=value1, name2=value2, ...

set_tags (**kwargs)

Method for setting tags for a recorder. In addition to using `R`, one can also set the tag to a specific recorder after getting it with `get_recorder` API.

- If *active recorder* exists: it will set tags through the active recorder.
- If *active recorder* not exists: the system will create a default experiment as well as a new recorder, and set the tags under it.

Here are some use cases:

```
# Case 1
with R.start('test'):
    R.set_tags(release_version="2.2.0")

# Case 2
R.set_tags(release_version="2.2.0")
```

Parameters `argument` (*keyword*) – name1=value1, name2=value2, ...

1.12.3 Experiment Manager

The `ExpManager` module in `Qlib` is responsible for managing different experiments. Most of the APIs of `ExpManager` are similar to `QlibRecorder`, and the most important API will be the `get_exp` method. User can directly refer to the documents above for some detailed information about how to use the `get_exp` method.

class `qlib.workflow.expm.ExpManager` (`uri: str, default_exp_name: Optional[str]`)

This is the `ExpManager` class for managing experiments. The API is designed similar to mlflow. (The link: https://mlflow.org/docs/latest/python_api/mlflow.html)

__init__ (`uri: str, default_exp_name: Optional[str]`)

Initialize self. See `help(type(self))` for accurate signature.

start_exp (*, `experiment_id: Optional[str] = None, experiment_name: Optional[str] = None, recorder_id: Optional[str] = None, recorder_name: Optional[str] = None, uri: Optional[str] = None, resume: bool = False, **kwargs`)

Start an experiment. This method includes first `get_or_create` an experiment, and then set it to be active.

Parameters

- `experiment_id` (`str`) – id of the active experiment.
- `experiment_name` (`str`) – name of the active experiment.
- `recorder_id` (`str`) – id of the recorder to be started.
- `recorder_name` (`str`) – name of the recorder to be started.
- `uri` (`str`) – the current tracking URI.
- `resume` (`boolean`) – whether to resume the experiment and recorder.

Returns

Return type An active experiment.

end_exp (`recorder_status: str = 'SCHEDULED', **kwargs`)

End an active experiment.

Parameters

- `experiment_name` (`str`) – name of the active experiment.

- **recorder_status** (*str*) – the status of the active recorder of the experiment.

create_exp (*experiment_name: Optional[str] = None*)

Create an experiment.

Parameters **experiment_name** (*str*) – the experiment name, which must be unique.

Returns

Return type An experiment object.

search_records (*experiment_ids=None, **kwargs*)

Get a pandas DataFrame of records that fit the search criteria of the experiment. Inputs are the search criteria user want to apply.

Returns

- *A pandas.DataFrame of records, where each metric, parameter, and tag are expanded into their own columns named metrics., params.*, and tags.* respectively. For records that don't have a particular metric, parameter, or tag, their value will be (NumPy) Nan, None, or None respectively.*

get_exp (*, *experiment_id=None, experiment_name=None, create: bool = True, start: bool = False*)

Retrieve an experiment. This method includes getting an active experiment, and get_or_create a specific experiment.

When user specify experiment id and name, the method will try to return the specific experiment. When user does not provide recorder id or name, the method will try to return the current active experiment. The *create* argument determines whether the method will automatically create a new experiment according to user's specification if the experiment hasn't been created before.

- If *create* is True:
 - If *active experiment* exists:
 - * no id or name specified, return the active experiment.
 - * if id or name is specified, return the specified experiment. If no such exp found, create a new experiment with given id or name. If *start* is set to be True, the experiment is set to be active.
 - If *active experiment* not exists:
 - * no id or name specified, create a default experiment.
 - * if id or name is specified, return the specified experiment. If no such exp found, create a new experiment with given id or name. If *start* is set to be True, the experiment is set to be active.
- Else If *create* is False:
 - If *active experiment* exists:
 - * no id or name specified, return the active experiment.
 - * if id or name is specified, return the specified experiment. If no such exp found, raise Error.
 - If *active experiment* not exists:
 - * no id or name specified. If the default experiment exists, return it, otherwise, raise Error.
 - * if id or name is specified, return the specified experiment. If no such exp found, raise Error.

Parameters

- **experiment_id** (*str*) – id of the experiment to return.
- **experiment_name** (*str*) – name of the experiment to return.
- **create** (*boolean*) – create the experiment it if hasn't been created before.
- **start** (*boolean*) – start the new experiment if one is created.

Returns**Return type** An experiment object.**delete_exp** (*experiment_id=None, experiment_name=None*)

Delete an experiment.

Parameters

- **experiment_id** (*str*) – the experiment id.
- **experiment_name** (*str*) – the experiment name.

default_uri

Get the default tracking URI from qlib.config.C

uri

Get the default tracking URI or current URI.

Returns**Return type** The tracking URI string.**set_uri** (*uri: Optional[str] = None*)

Set the current tracking URI and the corresponding variables.

Parameters **uri** (*str*) –**list_experiments** ()

List all the existing experiments.

Returns**Return type** A dictionary (name -> experiment) of experiments information that being stored.For other interfaces such as *create_exp*, *delete_exp*, please refer to [Experiment Manager API](#).

1.12.4 Experiment

The *Experiment* class is solely responsible for a single experiment, and it will handle any operations that are related to an experiment. Basic methods such as *start*, *end* an experiment are included. Besides, methods related to *recorders* are also available: such methods include *get_recorder* and *list_recorders*.

class `qlib.workflow.exp.Experiment` (*id, name*)

This is the *Experiment* class for each experiment being run. The API is designed similar to mlflow. (The link: https://mlflow.org/docs/latest/python_api/mlflow.html)

__init__ (*id, name*)

Initialize self. See `help(type(self))` for accurate signature.

start (*, *recorder_id=None, recorder_name=None, resume=False*)

Start the experiment and set it to be active. This method will also start a new recorder.

Parameters

- **recorder_id** (*str*) – the id of the recorder to be created.

- **recorder_name** (*str*) – the name of the recorder to be created.
- **resume** (*bool*) – whether to resume the first recorder

Returns

Return type An active recorder.

end (*recorder_status*=‘SCHEDULED’)

End the experiment.

Parameters **recorder_status** (*str*) – the status the recorder to be set with when ending (SCHEDULED, RUNNING, FINISHED, FAILED).

create_recorder (*recorder_name*=*None*)

Create a recorder for each experiment.

Parameters **recorder_name** (*str*) – the name of the recorder to be created.

Returns

Return type A recorder object.

search_records (***kargs*)

Get a pandas DataFrame of records that fit the search criteria of the experiment. Inputs are the search critera user want to apply.

Returns

- *A pandas.DataFrame of records, where each metric, parameter, and tag are expanded into their own columns named metrics., params.*, and tags.* respectively. For records that don’t have a particular metric, parameter, or tag, their value will be (NumPy) Nan, None, or None respectively.*

delete_recorder (*recorder_id*)

Create a recorder for each experiment.

Parameters **recorder_id** (*str*) – the id of the recorder to be deleted.

get_recorder (*recorder_id*=*None*, *recorder_name*=*None*, *create*: *bool* = *True*, *start*: *bool* = *False*)

Retrieve a Recorder for user. When user specify recorder id and name, the method will try to return the specific recorder. When user does not provide recorder id or name, the method will try to return the current active recorder. The *create* argument determines whether the method will automatically create a new recorder according to user’s specification if the recorder hasn’t been created before.

- If *create* is True:

- If *active recorder* exists:

- * no id or name specified, return the active recorder.

- * if id or name is specified, return the specified recorder. If no such exp found, create a new recorder with given id or name. If *start* is set to be True, the recorder is set to be active.

- If *active recorder* not exists:

- * no id or name specified, create a new recorder.

- * if id or name is specified, return the specified experiment. If no such exp found, create a new recorder with given id or name. If *start* is set to be True, the recorder is set to be active.

- Else If *create* is False:

- If *active recorder* exists:

- * no id or name specified, return the active recorder.
- * if id or name is specified, return the specified recorder. If no such exp found, raise Error.
- If *active recorder* not exists:
 - * no id or name specified, raise Error.
 - * if id or name is specified, return the specified recorder. If no such exp found, raise Error.

Parameters

- **recorder_id** (*str*) – the id of the recorder to be deleted.
- **recorder_name** (*str*) – the name of the recorder to be deleted.
- **create** (*boolean*) – create the recorder if it hasn't been created before.
- **start** (*boolean*) – start the new recorder if one is created.

Returns

Return type A recorder object.

list_recorders (***flt_kwarg*s)

List all the existing recorders of this experiment. Please first get the experiment instance before calling this method. If user want to use the method *R.list_recorders()*, please refer to the related API document in *QlibRecorder*.

flt_kwarg [dict] filter recorders by conditions e.g. `list_recorders(status=Recorder.STATUS_FI)`

Returns

Return type A dictionary (id -> recorder) of recorder information that being stored.

For other interfaces such as *search_records*, *delete_recorder*, please refer to [Experiment API](#).

Qlib also provides a default *Experiment*, which will be created and used under certain situations when users use the APIs such as *log_metrics* or *get_exp*. If the default *Experiment* is used, there will be related logged information when running *Qlib*. Users are able to change the name of the default *Experiment* in the config file of *Qlib* or during *Qlib*'s [initialization](#), which is set to be '*Experiment*'.

1.12.5 Recorder

The *Recorder* class is responsible for a single recorder. It will handle some detailed operations such as *log_metrics*, *log_params* of a single run. It is designed to help user to easily track results and things being generated during a run.

Here are some important APIs that are not included in the *QlibRecorder*:

class `qlib.workflow.recorder.Recorder(experiment_id, name)`

This is the *Recorder* class for logging the experiments. The API is designed similar to mlflow. (The link: https://mlflow.org/docs/latest/python_api/mlflow.html)

The status of the recorder can be SCHEDULED, RUNNING, FINISHED, FAILED.

__init__ (*experiment_id, name*)

Initialize self. See `help(type(self))` for accurate signature.

save_objects (*local_path=None, artifact_path=None, **kwargs*)

Save objects such as prediction file or model checkpoints to the artifact URI. User can save object through keywords arguments (name:value).

Parameters

- **local_path** (*str*) – if provided, them save the file or directory to the artifact URI.
- **artifact_path=None** (*str*) – the relative path for the artifact to be stored in the URI.

load_object (*name*)

Load objects such as prediction file or model checkpoints.

Parameters **name** (*str*) – name of the file to be loaded.

Returns

Return type The saved object.

start_run ()

Start running or resuming the Recorder. The return value can be used as a context manager within a *with* block; otherwise, you must call `end_run()` to terminate the current run. (See `ActiveRun` class in mlflow)

Returns

Return type An active running object (e.g. `mlflow.ActiveRun` object)

end_run ()

End an active Recorder.

log_params (***kwargs*)

Log a batch of params for the current run.

Parameters **arguments** (*keyword*) – key, value pair to be logged as parameters.

log_metrics (*step=None*, ***kwargs*)

Log multiple metrics for the current run.

Parameters **arguments** (*keyword*) – key, value pair to be logged as metrics.

set_tags (***kwargs*)

Log a batch of tags for the current run.

Parameters **arguments** (*keyword*) – key, value pair to be logged as tags.

delete_tags (**keys*)

Delete some tags from a run.

Parameters **keys** (*series of strs of the keys*) – all the name of the tag to be deleted.

list_artifacts (*artifact_path: str = None*)

List all the artifacts of a recorder.

Parameters **artifact_path** (*str*) – the relative path for the artifact to be stored in the URI.

Returns

Return type A list of artifacts information (name, path, etc.) that being stored.

list_metrics ()

List all the metrics of a recorder.

Returns

Return type A dictionary of metrics that being stored.

list_params ()

List all the params of a recorder.

Returns

Return type A dictionary of params that being stored.

```
list_tags()
```

List all the tags of a recorder.

Returns

Return type A dictionary of tags that being stored.

For other interfaces such as `save_objects`, `load_object`, please refer to [Recorder API](#).

1.12.6 Record Template

The `RecordTemp` class is a class that enables generate experiment results such as IC and backtest in a certain format. We have provided three different *Record Template* class:

- `SignalRecord`: This class generates the *prediction* results of the model.
- `SigAnaRecord`: This class generates the *IC*, *ICIR*, *Rank IC* and *Rank ICIR* of the model.

Here is a simple example of what is done in `SigAnaRecord`, which users can refer to if they want to calculate IC, Rank IC, Long-Short Return with their own prediction and label.

```
from qlib.contrib.eva.alpha import calc_ic, calc_long_short_return

ic, ric = calc_ic(pred.iloc[:, 0], label.iloc[:, 0])
long_short_r, long_avg_r = calc_long_short_return(pred.iloc[:, 0], label.iloc[:, 0])
```

- `PortAnaRecord`: This class generates the results of *backtest*. The detailed information about *backtest* as well as the available *strategy*, users can refer to [Strategy](#) and [Backtest](#).

Here is a simple example of what is done in `PortAnaRecord`, which users can refer to if they want to do backtest based on their own prediction and label.

```
from qlib.contrib.strategy.strategy import TopkDropoutStrategy
from qlib.contrib.evaluate import (
    backtest as normal_backtest,
    risk_analysis,
)

# backtest
STRATEGY_CONFIG = {
    "topk": 50,
    "n_drop": 5,
}
BACKTEST_CONFIG = {
    "verbose": False,
    "limit_threshold": 0.095,
    "account": 100000000,
    "benchmark": BENCHMARK,
    "deal_price": "close",
    "open_cost": 0.0005,
    "close_cost": 0.0015,
    "min_cost": 5,
}

strategy = TopkDropoutStrategy(**STRATEGY_CONFIG)
```

(continues on next page)

(continued from previous page)

```

report_normal, positions_normal = normal_backtest(pred_score, strategy=strategy,
                                                **BACKTEST_CONFIG)

# analysis
analysis = dict()
analysis["excess_return_without_cost"] = risk_analysis(report_normal["return"] -
                                                       report_normal["bench"])
analysis["excess_return_with_cost"] = risk_analysis(report_normal["return"] - report_
                                                       normal["bench"] - report_normal["cost"])
analysis_df = pd.concat(analysis) # type: pd.DataFrame
print(analysis_df)

```

For more information about the APIs, please refer to [Record Template API](#).

1.13 Analysis: Evaluation & Results Analysis

1.13.1 Introduction

Analysis is designed to show the graphical reports of Intraday Trading , which helps users to evaluate and analyse investment portfolios visually. The following are some graphics to view:

- **analysis_position**
 - report_graph
 - score_ic_graph
 - cumulative_return_graph
 - risk_analysis_graph
 - rank_label_graph
- **analysis_model**
 - model_performance_graph

1.13.2 Graphical Reports

Users can run the following code to get all supported reports.

```

>> import qlib.contrib.report as qcr
>> print(qcr.GRAPH_NAME_LIST)
['analysis_position.report_graph', 'analysis_position.score_ic_graph', 'analysis_-
position.cumulative_return_graph', 'analysis_position.risk_analysis_graph',
 'analysis_position.rank_label_graph', 'analysis_model.model_performance_graph']

```

Note: For more details, please refer to the function document: similar to `help(qcr.analysis_position.report_graph)`

1.13.3 Usage & Example

Usage of `analysis_position.report`

API

```
qlib.contrib.report.analysis_position.report.report_graph(report_df: pandas.core.frame.DataFrame, show_notebook: bool = True) → [<class 'list'>, <class 'tuple'>]
```

display backtest report

Example:

```
from qlib.contrib.evaluate import backtest
from qlib.contrib.strategy import TopkDropoutStrategy

# backtest parameters
bparas = {}
bparas['limit_threshold'] = 0.095
bparas['account'] = 1000000000

sparas = {}
sparas['topk'] = 50
sparas['n_drop'] = 230
strategy = TopkDropoutStrategy(**sparas)

report_normal_df, _ = backtest(pred_df, strategy, **bparas)

qcr.analysis_position.report_graph(report_normal_df)
```

Parameters

- **report_df – df.index.name** must be **date**, **df.columns** must contain **return**, **turnover**, **cost**, **bench**.

	return	cost	bench	turnover
date				
2017-01-04	0.003421	0.000864	0.011693	0.576325
2017-01-05	0.000508	0.000447	0.000721	0.227882
2017-01-06	-0.003321	0.000212	-0.004322	0.102765
2017-01-09	0.006753	0.000212	0.006874	0.105864
2017-01-10	-0.000416	0.000440	-0.003350	0.208396

- **show_notebook** – whether to display graphics in notebook, the default is **True**.


Returns if show_notebook is True, display in notebook; else return **plotly.graph_objs.Figure** list.

Graphical Result

Note:

- Axis X: Trading day
- **Axis Y:**

- **cum bench** Cumulative returns series of benchmark
 - **cum return wo cost** Cumulative returns series of portfolio without cost
 - **cum return w cost** Cumulative returns series of portfolio with cost
 - **return wo mdd** Maximum drawdown series of cumulative return without cost
 - **return w cost mdd:** Maximum drawdown series of cumulative return with cost
 - **cum ex return wo cost** The CAR (cumulative abnormal return) series of the portfolio compared to the benchmark without cost.
 - **cum ex return w cost** The CAR (cumulative abnormal return) series of the portfolio compared to the benchmark with cost.
 - **turnover** Turnover rate series
 - **cum ex return wo cost mdd** Drawdown series of CAR (cumulative abnormal return) without cost
 - **cum ex return w cost mdd** Drawdown series of CAR (cumulative abnormal return) with cost
- The shaded part above: Maximum drawdown corresponding to *cum return wo cost*
 - The shaded part below: Maximum drawdown corresponding to *cum ex return wo cost*
-

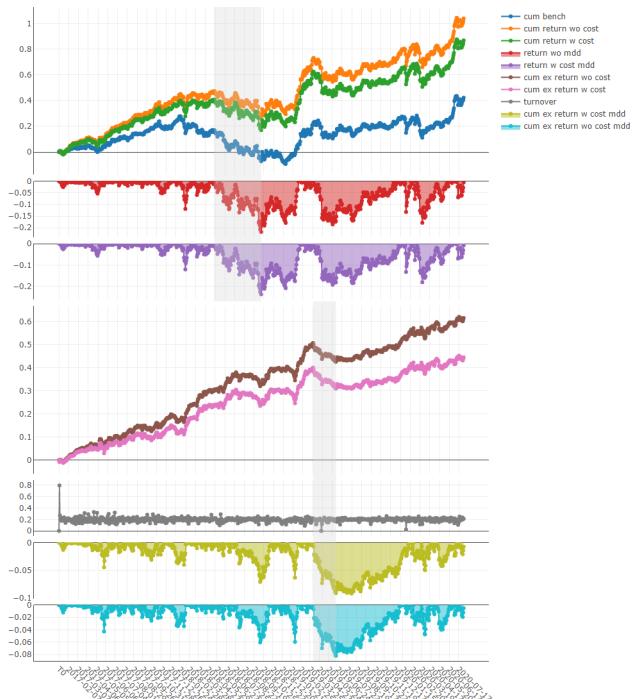

Usage of `analysis_position.score_ic`

API

```
qlib.contrib.report.analysis_position.score_ic_graph(pred_label: pandas.core.frame.DataFrame,
                                                    show_notebook: bool = True) →
[<class 'list'>, <class 'tuple'>]
```

score IC

Example:

```
from qlib.data import D
from qlib.contrib.report import analysis_position
pred_df_dates = pred_df.index.get_level_values(level='datetime')
features_df = D.features(D.instruments('csi500'), ['Ref($close, -2)/Ref($close, -1)-1'], pred_df_dates.min(), pred_df_dates.max())
features_df.columns = ['label']
pred_label = pd.concat([features_df, pred], axis=1, sort=True).
    reindex(features_df.index)
analysis_position.score_ic_graph(pred_label)
```

Parameters

- **pred_label** – index is **pd.MultiIndex**, index name is **[instrument, datetime]**; columns names is **[score, label]**.

instrument	datetime	score	label
SH600004	2017-12-11	-0.013502	-0.013502
	2017-12-12	-0.072367	-0.072367
	2017-12-13	-0.068605	-0.068605
	2017-12-14	0.012440	0.012440
	2017-12-15	-0.102778	-0.102778


- **show_notebook** – whether to display graphics in notebook, the default is **True**.

Returns if show_notebook is True, display in notebook; else return **plotly.graph_objs.Figure** list.

Graphical Result

Note:

- Axis X: Trading day
- **Axis Y:**
 - **ic** The Pearson correlation coefficient series between *label* and *prediction score*. In the above example, the *label* is formulated as *Ref(\$close, -1)/\$close - 1*. Please refer to [Data Feature](#) for more details.
 - **rank_ic** The Spearman's rank correlation coefficient series between *label* and *prediction score*.

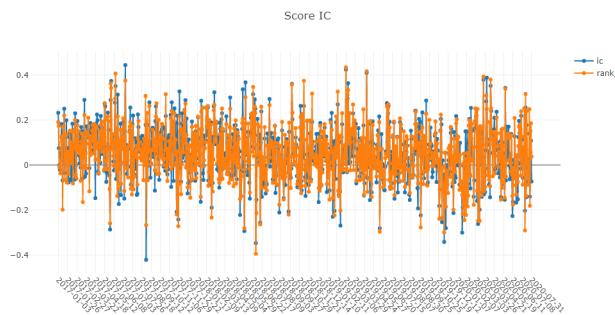

Usage of `analysis_position.risk_analysis`

API

```
qlib.contrib.report.analysis_position.risk_analysis.risk_analysis_graph(analysis_df:  
    pan-  
    das.core.frame.DataFrame  
    =  
    None,  
    re-  
    port_normal_df:  
    pan-  
    das.core.frame.DataFrame  
    =  
    None,  
    re-  
    port_long_short_df:  
    pan-  
    das.core.frame.DataFrame  
    =  
    None,  
    show_notebook:  
    bool  
    =  
    True)  
→  
It-  
er-  
able[plotly.graph_objs._figu
```

Generate analysis graph and monthly analysis

Example:

```
from qlib.contrib.evaluate import risk_analysis, backtest, long_  
    ↪short_backtest  
from qlib.contrib.strategy import TopkDropoutStrategy  
from qlib.contrib.report import analysis_position  
  
# backtest parameters  
bparas = {}  
bparas['limit_threshold'] = 0.095  
bparas['account'] = 1000000000
```

(continues on next page)

(continued from previous page)

```

sparas = {}
sparas['topk'] = 50
sparas['n_drop'] = 230
strategy = TopkDropoutStrategy(**sparas)

report_normal_df, positions = backtest(pred_df, strategy, ↴
                                         **bparas)
# long_short_map = long_short_backtest(pred_df)
# report_long_short_df = pd.DataFrame(long_short_map)

analysis = dict()
# analysis['pred_long'] = risk_analysis(report_long_short_df[
#                                         'long'])
# analysis['pred_short'] = risk_analysis(report_long_short_df[
#                                         'short'])
# analysis['pred_long_short'] = risk_analysis(report_long_short_
#                                         df['long_short'])
analysis['excess_return_without_cost'] = risk_analysis(report_-
                                         normal_df['return'] - report_normal_df['bench'])
analysis['excess_return_with_cost'] = risk_analysis(report_-
                                         normal_df['return'] - report_normal_df['bench'] - report_-
                                         normal_df['cost'])
analysis_df = pd.concat(analysis)

analysis_position.risk_analysis_graph(analysis_df, report_-
                                         normal_df)

```

Parameters

- **analysis_df** – analysis data, index is **pd.MultiIndex**; columns names is **[risk]**.

		risk
excess_return_without_cost	mean	0.000692
	std	0.005374
	annualized_return	0.174495
	information_ratio	2.045576
	max_drawdown	-0.079103
excess_return_with_cost	mean	0.000499
	std	0.005372
	annualized_return	0.125625
	information_ratio	1.473152
	max_drawdown	-0.088263

- **report_normal_df** – **df.index.name** must be **date**, **df.columns** must contain **return**, **turnover**, **cost**, **bench**.

	return	cost	bench	turnover
date				
2017-01-04	0.003421	0.000864	0.011693	0.576325
2017-01-05	0.000508	0.000447	0.000721	0.227882
2017-01-06	-0.003321	0.000212	-0.004322	0.102765
2017-01-09	0.006753	0.000212	0.006874	0.105864
2017-01-10	-0.000416	0.000440	-0.003350	0.208396

- **report_long_short_df** – **df.index.name** must be **date**, **df.columns** contain **long**, **short**, **long_short**.

	long	short	long_short
date			
2017-01-04	-0.001360	0.001394	0.000034
2017-01-05	0.002456	0.000058	0.002514
2017-01-06	0.000120	0.002739	0.002859
2017-01-09	0.001436	0.001838	0.003273
2017-01-10	0.000824	-0.001944	-0.001120

- **show_notebook** – Whether to display graphics in a notebook, default **True**. If True, show graph in notebook If False, return graph figure

Returns

Graphical Result

Note:

- general graphics
 - **std**
 - * **excess_return_without_cost** The *Standard Deviation* of CAR (cumulative abnormal return) without cost.
 - * **excess_return_with_cost** The *Standard Deviation* of CAR (cumulative abnormal return) with cost.
 - **annualized_return**
 - * **excess_return_without_cost** The *Annualized Rate* of CAR (cumulative abnormal return) without cost.
 - * **excess_return_with_cost** The *Annualized Rate* of CAR (cumulative abnormal return) with cost.
 - **information_ratio**
 - * **excess_return_without_cost** The *Information Ratio* without cost.
 - * **excess_return_with_cost** The *Information Ratio* with cost.

To know more about *Information Ratio*, please refer to [Information Ratio – IR](#).

– **max_drawdown**

- * **excess_return_without_cost** The *Maximum Drawdown* of CAR (cumulative abnormal return) without cost.
- * **excess_return_with_cost** The *Maximum Drawdown* of CAR (cumulative abnormal return) with cost.



Note:

- **annualized_return/max_drawdown/information_ratio/std graphics**

- Axis X: Trading days grouped by month

- **Axis Y:**

- * **annualized_return graphics**

- **excess_return_without_cost_annualized_return** The *Annualized Rate* series of monthly CAR (cumulative abnormal return) without cost.

- **excess_return_with_cost_annualized_return** The *Annualized Rate* series of monthly CAR (cumulative abnormal return) with cost.

- * **max_drawdown graphics**

- **excess_return_without_cost_max_drawdown** The *Maximum Drawdown* series of monthly CAR (cumulative abnormal return) without cost.

- **excess_return_with_cost_max_drawdown** The *Maximum Drawdown* series of monthly CAR (cumulative abnormal return) with cost.

- * **information_ratio graphics**



- **excess_return_without_cost_information_ratio** The *Information Ratio* series of monthly CAR (cumulative abnormal return) without cost.


- **excess_return_with_cost_information_ratio** The *Information Ratio* series of monthly CAR (cumulative abnormal return) with cost.

- * **std graphics**

- **excess_return_without_cost_max_drawdown** The *Standard Deviation* series of monthly CAR (cumulative abnormal return) without cost.

- **excess_return_with_cost_max_drawdown** The *Standard Deviation* series of monthly CAR (cumulative abnormal return) with cost.

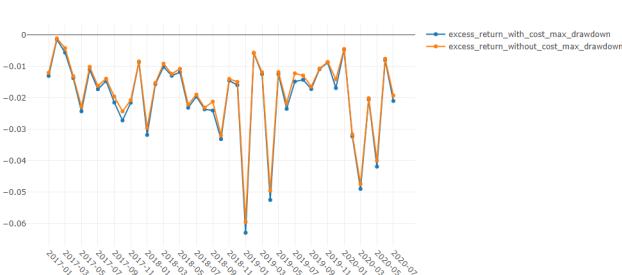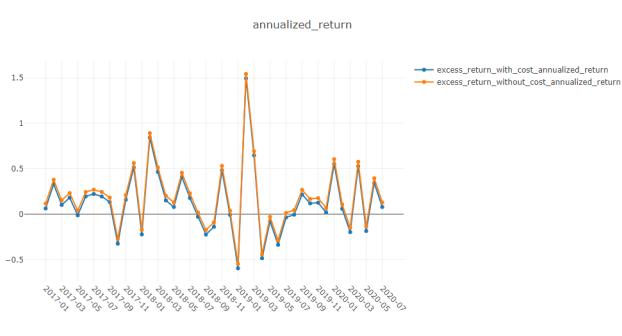

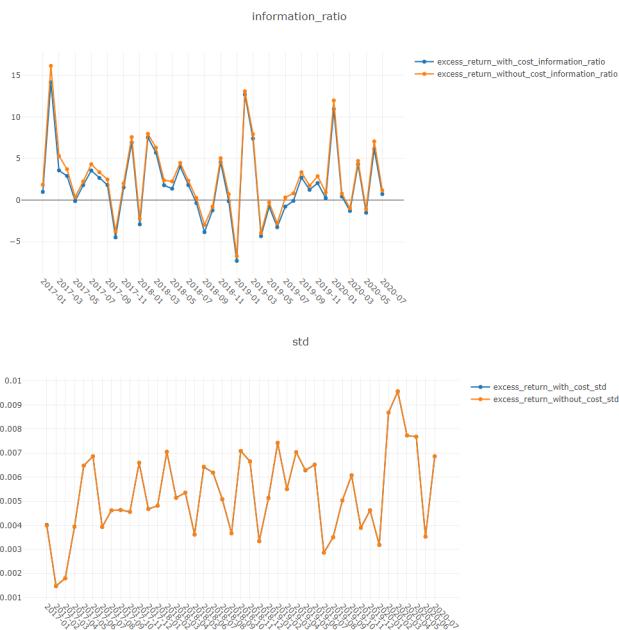

Usage of `analysis_model.analysis_model_performance`

API

```
qlib.contrib.report.analysis_model.analysis_model_performance.ic_figure(ic_df:  
    pandas.core.frame.DataFrame,  
    show_nature_day=True,  
    **kwargs)  
    →  
    plotly.graph_objs._Figure
```

IC figure

Parameters

- **ic_df** – ic DataFrame
- **show_nature_day** – whether to display the abscissa of non-trading day

Returns plotly.graph_objs.Figure

```
qlib.contrib.report.analysis_model.analysis_model_performance.model_performance_graph(pred_l
pan-
das.co
lag:
int
=
I,
N:
int
=
5,
re-
verse=
rank=
graph_
list
=
[‘group’,
‘pred_’,
‘pred_’,
show_
bool
=
True,
show_
→
[<class
‘list’>,
<class
‘tu-
ple’>]
```

Model performance

Parameters `pred_label` – index is `pd.MultiIndex`, index name is `[instrument, datetime]`; columns names is `**[score, label]**`. It is usually same as the label of model training(e.g. “Ref(\$close, -2)/Ref(\$close, -1) - 1”).

instrument	datetime	score	label
SH600004	2017-12-11	-0.013502	-0.013502
	2017-12-12	-0.072367	-0.072367
	2017-12-13	-0.068605	-0.068605
	2017-12-14	0.012440	0.012440
	2017-12-15	-0.102778	-0.102778

Parameters

- `lag` – `pred.groupby(level='instrument')[‘score’].shift(lag)`. It will be only used in the auto-correlation computing.
- `N` – group number, default 5.
- `reverse` – if `True`, `pred[‘score’] *= -1`.
- `rank` – if `True`, calculate rank ic.
- `graph_names` – graph names; default `['cumulative_return', ‘pred_ic’, ‘pred_autocorr’, ‘pred_turnover’]`.
- `show_notebook` – whether to display graphics in notebook, the default is `True`.

- **show_nature_day** – whether to display the abscissa of non-trading day.

Returns if show_notebook is True, display in notebook; else return `plotly.graph_objs.Figure` list.

Graphical Results


Note:

- **cumulative return graphics**

- **Group1**: The *Cumulative Return* series of stocks group with (*ranking ratio* of label $\leq 20\%$)
- **Group2**: The *Cumulative Return* series of stocks group with ($20\% < \text{ranking ratio} \leq 40\%$)
- **Group3**: The *Cumulative Return* series of stocks group with ($40\% < \text{ranking ratio} \leq 60\%$)
- **Group4**: The *Cumulative Return* series of stocks group with ($60\% < \text{ranking ratio} \leq 80\%$)
- **Group5**: The *Cumulative Return* series of stocks group with ($80\% < \text{ranking ratio}$)
- **long-short**: The Difference series between *Cumulative Return* of *Group1* and of *Group5*
- **long-average** The Difference series between *Cumulative Return* of *Group1* and average *Cumulative Return* for all stocks.


The *ranking ratio* can be formulated as follows.

$$\text{ranking ratio} = \frac{\text{Ascending Ranking of label}}{\text{Number of Stocks in the Portfolio}}$$

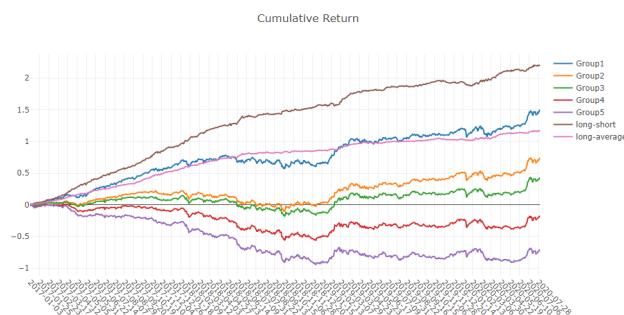

Note:


- **long-short/long-average** The distribution of long-short/long-average returns on each trading day

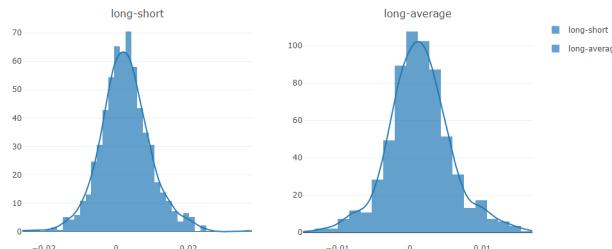

Note:


- **Information Coefficient**

- The *Pearson correlation coefficient* series between *labels* and *prediction scores* of stocks in portfolio.
- The graphics reports can be used to evaluate the *prediction scores*.

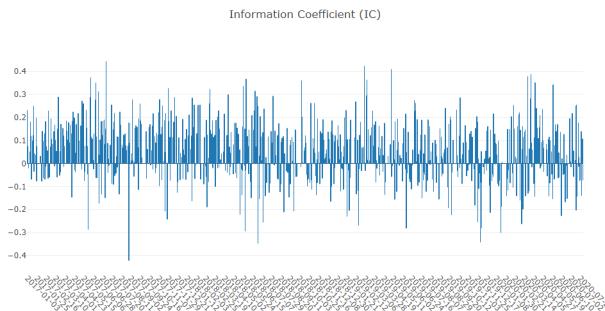


Note:

- **Monthly IC** Monthly average of the *Information Coefficient*
-

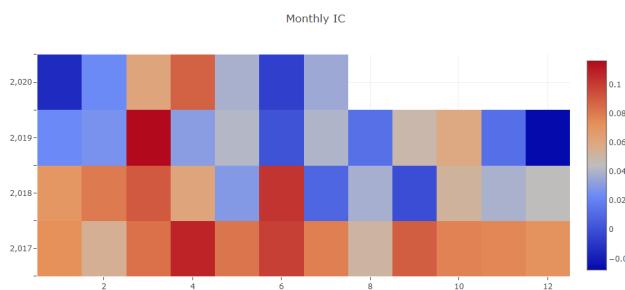

Note:


- **IC** The distribution of the *Information Coefficient* on each trading day.
 - **IC Normal Dist. Q-Q** The *Quantile-Quantile Plot* is used for the normal distribution of *Information Coefficient* on each trading day.
-

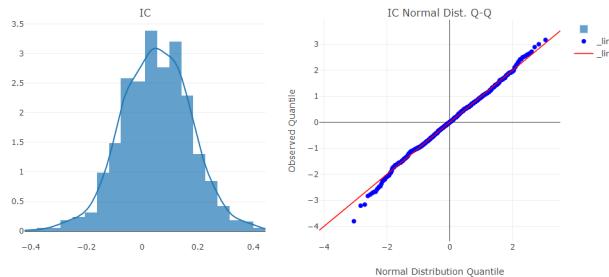

Note:


- **Auto Correlation**

- The *Pearson correlation coefficient* series between the latest *prediction scores* and the *prediction scores lag* days ago of stocks in portfolio on each trading day.
- The graphics reports can be used to estimate the turnover rate.

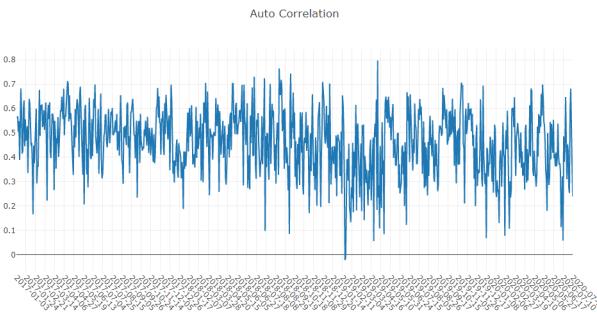

1.14 Online Serving

1.14.1 Introduction

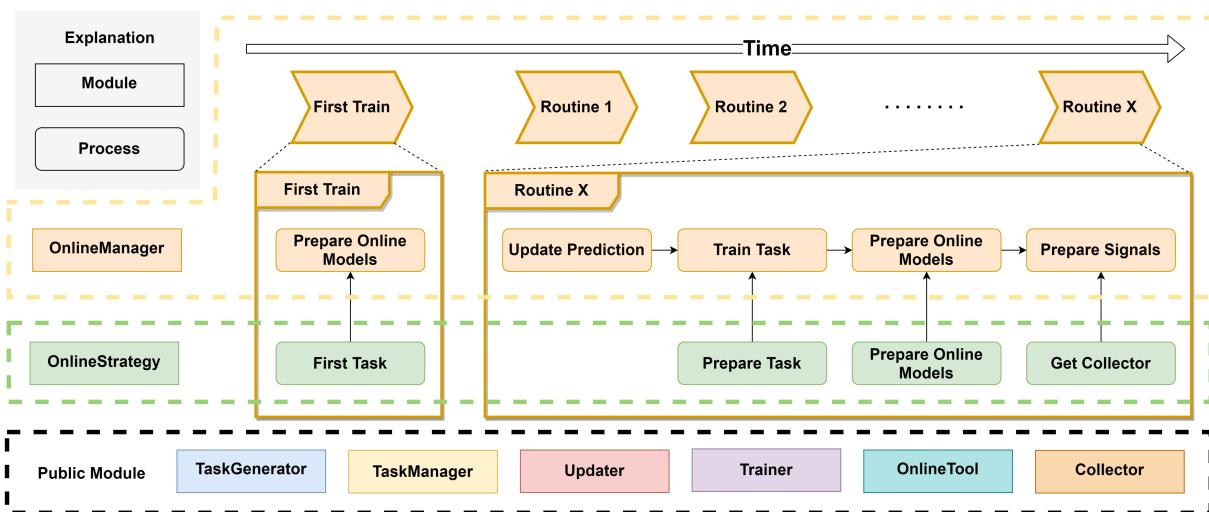

In addition to backtesting, one way to test a model is effective is to make predictions in real market conditions or even do real trading based on those predictions. Online Serving is a set of modules for online models using the latest data, which including *Online Manager*, *Online Strategy*, *Online Tool*, *Updater*.

Here are several examples for reference, which demonstrate different features of Online Serving. If you have many models or *task* needs to be managed, please consider [Task Management](#). The examples are based on some components in [Task Management](#) such as `TrainerRM` or `Collector`.

NOTE: User should keep his data source updated to support online serving. For example, Qlib provides a batch of scripts to help users update Yahoo daily data.

1.14.2 Online Manager

OnlineManager can manage a set of *Online Strategy* and run them dynamically.

With the change of time, the decisive models will be also changed. In this module, we call those contributing models *online* models. In every routine(such as every day or every minute), the *online* models may be changed and the prediction of them needs to be updated. So this module provides a series of methods to control this process.

This module also provides a method to simulate *Online Strategy* in history. Which means you can verify your strategy or find a better one.

There are 4 total situations for using different trainers in different situations:

Situations	Description
Online + Trainer	When you want to do a REAL routine, the Trainer will help you train the models. It will train models task by task and strategy by strategy.
Online + Delay-Trainer	When your models don't have any temporal dependence, the DelayTrainer will train nothing until all tasks have been prepared. It makes user can train all tasks in the end of <i>routine</i> or <i>first_train</i> .
Simulation + Trainer	When your models have some temporal dependence on the previous models, then you need to consider using Trainer. This means it will REAL train your models in every routine and prepare signals for every routine.
Simulation + Delay-Trainer	When your models don't have any temporal dependence, you can use DelayTrainer for the ability to multitasking. It means all tasks in all routines can be REAL trained at the end of simulating. The signals will be prepared well at different time segments (based on whether or not any new model is online).

```
class qlib.workflow.online.manager.OnlineManager(strategies:
    Union[qlib.workflow.online.strategy.OnlineStrategy,
    List[qlib.workflow.online.strategy.OnlineStrategy]],
    trainer: qlib.model.trainer.Trainer =
    None, begin_time: Union[str, pandas._libs.tslibs.timestamps.Timestamp]
    = None, freq='day')
```

OnlineManager can manage online models with *Online Strategy*. It also provides a history recording of which models are online at what time.

```
__init__(strategies: Union[qlib.workflow.online.strategy.OnlineStrategy,
    List[qlib.workflow.online.strategy.OnlineStrategy]], trainer: qlib.model.trainer.Trainer
    = None, begin_time: Union[str, pandas._libs.tslibs.timestamps.Timestamp] = None,
    freq='day')
```

Init OnlineManager. One OnlineManager must have at least one OnlineStrategy.

Parameters

- **strategies** (Union[OnlineStrategy, List[OnlineStrategy]]) – an instance of OnlineStrategy or a list of OnlineStrategy
- **begin_time** (Union[str, pd.Timestamp], optional) – the OnlineManager will begin at this time. Defaults to None for using the latest date.
- **trainer** (Trainer) – the trainer to train task. None for using TrainerR.
- **freq** (str, optional) – data frequency. Defaults to “day”.

```
first_train(strategies: List[qlib.workflow.online.strategy.OnlineStrategy] = None, model_kwarg:
    dict = {})
```

Get tasks from every strategy's first_tasks method and train them. If using DelayTrainer, it can finish training all together after every strategy's first_tasks.

Parameters

- **strategies** (*List[OnlineStrategy]*) – the strategies list (need this param when adding strategies). None for use default strategies.
- **model_kwargs** (*dict*) – the params for *prepare_online_models*

routine (*cur_time: Union[str, pandas._libs.tslibs.timestamps.Timestamp] = None, task_kwargs: dict = {}, model_kwargs: dict = {}, signal_kwargs: dict = {}*)
Typical update process for every strategy and record the online history.

The typical update process after a routine, such as day by day or month by month. The process is: Update predictions -> Prepare tasks -> Prepare online models -> Prepare signals.

If using DelayTrainer, it can finish training all together after every strategy's *prepare_tasks*.

Parameters

- **cur_time** (*Union[str, pd.Timestamp], optional*) – run routine method in this time. Defaults to None.
- **task_kwargs** (*dict*) – the params for *prepare_tasks*
- **model_kwargs** (*dict*) – the params for *prepare_online_models*
- **signal_kwargs** (*dict*) – the params for *prepare_signals*

get_collector (**kwargs) → qlib.workflow.task.collect.MergeCollector

Get the instance of [Collector](#) to collect results from every strategy. This collector can be a basis as the signals preparation.

Parameters **kwargs – the params for *get_collector*.

Returns the collector to merge other collectors.

Return type *MergeCollector*

add_strategy (*strategies: Union[qlib.workflow.online.strategy.OnlineStrategy, List[qlib.workflow.online.strategy.OnlineStrategy]]*)
Add some new strategies to OnlineManager.

Parameters **strategy** (*Union[OnlineStrategy, List[OnlineStrategy]]*)
– a list of OnlineStrategy

prepare_signals (*prepare_func: Callable = <qlib.model.ens.ensemble.AverageEnsemble object>, over_write=False*)

After preparing the data of the last routine (a box in box-plot) which means the end of the routine, we can prepare trading signals for the next routine.

NOTE: Given a set prediction, all signals before these prediction end times will be prepared well.

Even if the latest signal already exists, the latest calculation result will be overwritten.

Note: Given a prediction of a certain time, all signals before this time will be prepared well.

Parameters

- **prepare_func** (*Callable, optional*) – Get signals from a dict after collecting. Defaults to *AverageEnsemble()*, the results collected by *MergeCollector* must be {xxx:pred}.
- **over_write** (*bool, optional*) – If True, the new signals will overwrite. If False, the new signals will append to the end of signals. Defaults to False.

Returns the signals.

Return type pd.DataFrame

get_signals() → Union[pandas.core.series.Series, pandas.core.frame.DataFrame]
Get prepared online signals.

Returns pd.Series for only one signals every datetime. pd.DataFrame for multiple signals, for example, buy and sell operations use different trading signals.

Return type Union[pd.Series, pd.DataFrame]

simulate(*end_time=None*, *frequency='day'*, *task_kwargs={}*, *model_kwargs={}*, *signal_kwargs={}*)
→ Union[pandas.core.series.Series, pandas.core.frame.DataFrame]
Starting from the current time, this method will simulate every routine in OnlineManager until the end time.

Considering the parallel training, the models and signals can be prepared after all routine simulating.

The delay training way can be DelayTrainer and the delay preparing signals way can be `delay_prepare`.

Parameters

- **end_time** – the time the simulation will end
- **frequency** – the calendar frequency
- **task_kwargs (dict)** – the params for `prepare_tasks`
- **model_kwargs (dict)** – the params for `prepare_online_models`
- **signal_kwargs (dict)** – the params for `prepare_signals`

Returns pd.Series for only one signals every datetime. pd.DataFrame for multiple signals, for example, buy and sell operations use different trading signals.

Return type Union[pd.Series, pd.DataFrame]

delay_prepare(*model_kwargs={}*, *signal_kwargs={}*)
Prepare all models and signals if something is waiting for preparation.

Parameters

- **model_kwargs** – the params for `end_train`
- **signal_kwargs** – the params for `prepare_signals`

1.14.3 Online Strategy

OnlineStrategy module is an element of online serving.

class qlib.workflow.online.strategy.**OnlineStrategy**(*name_id: str*)
OnlineStrategy is working with *Online Manager*, responding to how the tasks are generated, the models are updated and signals are prepared.

__init__(*name_id: str*)
Init OnlineStrategy. This module **MUST** use Trainer to finishing model training.

Parameters

- **name_id (str)** – a unique name or id.
- **trainer (Trainer, optional)** – a instance of Trainer. Defaults to None.

prepare_tasks (*cur_time*, ***kwargs*) → List[dict]

After the end of a routine, check whether we need to prepare and train some new tasks based on *cur_time* (None for latest).. Return the new tasks waiting for training.

You can find the last online models by `OnlineTool.online_models`.

prepare_online_models (*trained_models*, *cur_time=None*) → List[object]

Select some models from trained models and set them to online models. This is a typical implementation to online all trained models, you can override it to implement the complex method. You can find the last online models by `OnlineTool.online_models` if you still need them.

NOTE: Reset all online models to trained models. If there are no trained models, then do nothing.

NOTE: Current implementation is very naive. Here is a more complex situation which is more closer to the practical scenarios. 1. Train new models at the day before *test_start* (at time stamp *T*) 2. Switch models at the *test_start* (at time timestamp *T + 1* typically)

Parameters

- **models** (*list*) – a list of models.
- **cur_time** (*pd.DataFrame*) – current time from `OnlineManger`. None for the latest.

Returns a list of online models.

Return type List[object]

first_tasks () → List[dict]

Generate a series of tasks firstly and return them.

get_collector () → `qlib.workflow.task.collect.Collector`

Get the instance of `Collector` to collect different results of this strategy.

For example:

- 1) collect predictions in Recorder
- 2) collect signals in a txt file

Returns Collector

```
class qlib.workflow.online.strategy.RollingStrategy(name_id: str,
                                                    task_template: Union[dict,
                                                    List[dict]],
                                                    rolling_gen:
                                                    qlib.workflow.task.gen.RollingGen)
```

This example strategy always uses the latest rolling model sas online models.

```
__init__(name_id: str, task_template: Union[dict, List[dict]], rolling_gen:
        qlib.workflow.task.gen.RollingGen)
```

Init RollingStrategy.

Assumption: the str of name_id, the experiment name, and the trainer's experiment name are the same.

Parameters

- **name_id** (*str*) – a unique name or id. Will be also the name of the Experiment.
- **task_template** (*Union[dict, List[dict]]*) – a list of task_template or a single template, which will be used to generate many tasks using `rolling_gen`.
- **rolling_gen** (`RollingGen`) – an instance of RollingGen

```
get_collector(process_list=[<qlib.model.ens.group.RollingGroup object>], rec_key_func=None,
               rec_filter_func=None, artifacts_key=None)
```

Get the instance of `Collector` to collect results. The returned collector must distinguish results in different models.

Assumption: the models can be distinguished based on the model name and rolling test segments. If you do not want this assumption, please implement your method or use another `rec_key_func`.

Parameters

- `rec_key_func` (`Callable`) – a function to get the key of a recorder. If None, use recorder id.
- `rec_filter_func` (`Callable, optional`) – filter the recorder by return True or False. Defaults to None.
- `artifacts_key` (`List[str], optional`) – the artifacts key you want to get. If None, get all artifacts.

```
first_tasks() → List[dict]
```

Use `rolling_gen` to generate different tasks based on `task_template`.

Returns a list of tasks

Return type List[dict]

```
prepare_tasks(cur_time) → List[dict]
```

Prepare new tasks based on `cur_time` (None for the latest).

You can find the last online models by `OnlineToolR.online_models`.

Returns a list of new tasks.

Return type List[dict]

1.14.4 Online Tool

`OnlineTool` is a module to set and unset a series of *online* models. The *online* models are some decisive models in some time points, which can be changed with the change of time. This allows us to use efficient submodels as the market-style changing.

```
class qlib.workflow.online.utils.OnlineTool
```

`OnlineTool` will manage *online* models in an experiment that includes the model recorders.

```
__init__()
```

Init `OnlineTool`.

```
set_online_tag(tag, recorder: Union[list, object])
```

Set `tag` to the model to sign whether online.

Parameters

- `tag` (`str`) – the tags in `ONLINE_TAG`, `OFFLINE_TAG`
- `recorder` (`Union[list, object]`) – the model's recorder

```
get_online_tag(recorder: object) → str
```

Given a model recorder and return its online tag.

Parameters `recorder` (`Object`) – the model's recorder

Returns the online tag

Return type str

reset_online_tag (*recorder: Union[list, object]*)

Offline all models and set the recorders to ‘online’.

Parameters **recorder** (*Union[list, object]*) – the recorder you want to reset to ‘online’.

online_models () → list

Get current *online* models

Returns a list of *online* models.

Return type list

update_online_pred (*to_date=None*)

Update the predictions of *online* models to *to_date*.

Parameters **to_date** (*pd.Timestamp*) – the pred before this date will be updated. None for updating to the latest.

class *qlib.workflow.online.utils.OnlineToolR* (*default_exp_name: str = None*)

The implementation of OnlineTool based on (R)ecorder.

__init__ (*default_exp_name: str = None*)

Init OnlineToolR.

Parameters **default_exp_name** (*str*) – the default experiment name.

set_online_tag (*tag, recorder: Union[qlib.workflow.recorder.Recorder, List[T]]*)

Set *tag* to the model’s recorder to sign whether online.

Parameters

- **tag** (*str*) – the tags in *ONLINE_TAG*, *NEXT_ONLINE_TAG*, *OFFLINE_TAG*
- **recorder** (*Union[Recorder, List]*) – a list of Recorder or an instance of Recorder

get_online_tag (*recorder: qlib.workflow.recorder.Recorder*) → str

Given a model recorder and return its online tag.

Parameters **recorder** (*Recorder*) – an instance of recorder

Returns the online tag

Return type str

reset_online_tag (*recorder: Union[qlib.workflow.recorder.Recorder, List[T]], exp_name: str = None*)

Offline all models and set the recorders to ‘online’.

Parameters

- **recorder** (*Union[Recorder, List]*) – the recorder you want to reset to ‘online’.
- **exp_name** (*str*) – the experiment name. If None, then use *default_exp_name*.

online_models (*exp_name: str = None*) → list

Get current *online* models

Parameters **exp_name** (*str*) – the experiment name. If None, then use *default_exp_name*.

Returns a list of *online* models.

Return type list

update_online_pred(*to_date=None*, *exp_name: str = None*)

Update the predictions of online models to *to_date*.

Parameters

- **to_date** (*pd.Timestamp*) – the pred before this date will be updated. *None* for updating to latest time in Calendar.
- **exp_name** (*str*) – the experiment name. If *None*, then use *default_exp_name*.

1.14.5 Updater

Updater is a module to update artifacts such as predictions when the stock data is updating.

class *qlib.workflow.online.update.RMDLoader*(*rec: qlib.workflow.recorder.Recorder*)

Recorder Model Dataset Loader

__init__(*rec: qlib.workflow.recorder.Recorder*)

Initialize self. See help(type(self)) for accurate signature.

get_dataset(*start_time*, *end_time*, *segments=None*) → *qlib.data.dataset.DatasetH*

Load, config and setup dataset.

This dataset is for inference.

Parameters

- **start_time** – the start_time of underlying data
- **end_time** – the end_time of underlying data
- **segments** – dict the segments config for dataset Due to the time series dataset (TSDatasetH), the test segments maybe different from start_time and end_time

Returns the instance of *DatasetH*

Return type *DatasetH*

class *qlib.workflow.online.update.RecordUpdater*(*record:*

qlib.workflow.recorder.Recorder,
**args, **kwargs)*

Update a specific recorders

__init__(*record: qlib.workflow.recorder.Recorder, *args, **kwargs*)

Initialize self. See help(type(self)) for accurate signature.

update(*args, **kwargs)

Update info for specific recorder

class *qlib.workflow.online.update.DSBasedUpdater*(*record:*

qlib.workflow.recorder.Recorder,
to_date=None, hist_ref: int = 0,
freq='day', fname='pred.pkl')

Dataset-Based Updater - Provding updating feature for Updating data based on Qlib Dataset

Assumption - Based on Qlib dataset - The data to be updated is a multi-level index pd.DataFrame. For example label , prediction.

LABEL0

datetime instrument 2021-05-10 SH600000 0.006965

SH600004 0.003407

... ... 2021-05-28 SZ300498 0.015748

```
SZ300676 -0.001321
__init__(record: qlib.workflow.recorder.Recorder, to_date=None, hist_ref: int = 0, freq='day',
         fname='pred.pkl')
    Init PredUpdater.
```

Parameters

- **record** – Recorder
- **to_date** – update to prediction to the *to_date*
- **hist_ref** – int Sometimes, the dataset will have historical depends. Leave the problem to users to set the length of historical dependency

Note: the start_time is not included in the hist_ref

prepare_data() → qlib.data.dataset.DatasetH

Load dataset

Separating this function will make it easier to reuse the dataset

Returns the instance of DatasetH

Return type *DatasetH*

update(dataset: qlib.data.dataset.DatasetH = None)

Update the data in a recorder.

Parameters **DatasetH** – the instance of DatasetH. None for reprepae.

get_update_data(dataset: qlib.data.dataset.Dataset) → pandas.core.frame.DataFrame

return the updated data based on the given dataset

The difference between *get_update_data* and *update - update_date* only include some data specific feature
- *update* include some general routine steps(e.g. prepare dataset, checking)

```
class qlib.workflow.online.update.PredUpdater(record: qlib.workflow.recorder.Recorder,
                                              to_date=None, hist_ref: int = 0,
                                              freq='day', fname='pred.pkl')
```

Update the prediction in the Recorder

get_update_data(dataset: qlib.data.dataset.Dataset) → pandas.core.frame.DataFrame

return the updated data based on the given dataset

The difference between *get_update_data* and *update - update_date* only include some data specific feature
- *update* include some general routine steps(e.g. prepare dataset, checking)

```
class qlib.workflow.online.update.LabelUpdater(record: qlib.workflow.recorder.Recorder,
                                               to_date=None, **kwargs)
```

Update the label in the recorder

Assumption - The label is generated from record_temp.SignalRecord.

__init__(record: qlib.workflow.recorder.Recorder, to_date=None, **kwargs)

Init PredUpdater.

Parameters

- **record** – Recorder
- **to_date** – update to prediction to the *to_date*

- **hist_ref** – int Sometimes, the dataset will have historical depends. Leave the problem to users to set the length of historical dependency

Note: the start_time is not included in the hist_ref

get_update_data (*dataset: qlib.data.dataset.Dataset*) → pandas.core.frame.DataFrame
return the updated data based on the given dataset

The difference between *get_update_data* and *update - update_date* only include some data specific feature - *update* include some general routine steps(e.g. prepare dataset, checking)

1.15 Building Formulaic Alphas

1.15.1 Introduction

In quantitative trading practice, designing novel factors that can explain and predict future asset returns are of vital importance to the profitability of a strategy. Such factors are usually called alpha factors, or alphas in short.

A formulaic alpha, as the name suggests, is a kind of alpha that can be presented as a formula or a mathematical expression.

1.15.2 Building Formulaic Alphas in Qlib

In Qlib, users can easily build formulaic alphas.

Example

MACD, short for moving average convergence/divergence, is a formulaic alpha used in technical analysis of stock prices. It is designed to reveal changes in the strength, direction, momentum, and duration of a trend in a stock's price.

MACD can be presented as the following formula:

$$MACD = 2 \times (DIF - DEA)$$

Note: *DIF* means Differential value, which is 12-period EMA minus 26-period EMA.

$$DIF = \frac{EMA(CLOSE, 12) - EMA(CLOSE, 26)}{CLOSE}$$

‘DEA’means a 9-period EMA of the DIF.

$$DEA = \frac{EMA(DIF, 9)}{CLOSE}$$

Users can use Data Handler to build formulaic alphas *MACD* in qlib:

Note: Users need to initialize Qlib with *qlib.init* first. Please refer to [initialization](#).

```
>> from qlib.data.dataset.loader import QlibDataLoader
>> MACD_EXP = '(EMA($close, 12) - EMA($close, 26))/$close - EMA((EMA($close, 12) -_
>> EMA($close, 26))/$close, 9)/$close'
>> fields = [MACD_EXP] # MACD
>> names = ['MACD']
>> labels = ['Ref($close, -2)/Ref($close, -1) - 1'] # label
>> label_names = ['LABEL']
>> data_loader_config = {
...     "feature": (fields, names),
...     "label": (labels, label_names)
... }
>> data_loader = QlibDataLoader(config=data_loader_config)
>> df = data_loader.load(instruments='csi300', start_time='2010-01-01', end_time=
>> '2017-12-31')
>> print(df)
      feature      label
      MACD      LABEL
datetime   instrument
2010-01-04 SH600000  -0.011547 -0.019672
             SH600004   0.002745 -0.014721
             SH600006   0.010133  0.002911
             SH600008  -0.001113  0.009818
             SH600009   0.025878 -0.017758
...
2017-12-29 SZ300124   0.007306 -0.005074
             SZ300136  -0.013492  0.056352
             SZ300144  -0.000966  0.011853
             SZ300251   0.004383  0.021739
             SZ300315  -0.030557  0.012455
```

1.15.3 Reference

To learn more about Data Loader, please refer to [Data Loader](#)

To learn more about Data API, please refer to [Data API](#)

1.16 Online & Offline mode

1.16.1 Introduction

Qlib supports Online mode and Offline mode. Only the Offline mode is introduced in this document.

The Online mode is designed to solve the following problems:

- Manage the data in a centralized way. Users don't have to manage data of different versions.
- Reduce the amount of cache to be generated.
- Make the data can be accessed in a remote way.

1.16.2 Qlib-Server

Qlib-Server is the assorted server system for Qlib, which utilizes Qlib for basic calculations and provides extensive server system and cache mechanism. With QLibServer, the data provided for Qlib can be managed in a

centralized manner. With Qlib-Server, users can use Qlib in Online mode.

1.16.3 Reference

If users are interested in Qlib-Server and Online mode, please refer to [Qlib-Server Project](#) and [Qlib-Server Document](#).

1.17 Serialization

1.17.1 Introduction

Qlib supports dumping the state of DataHandler, DataSet, Processor and Model, etc. into a disk and reloading them.

1.17.2 Serializable Class

Qlib provides a base class `qlib.utils.serial.Serializable`, whose state can be dumped into or loaded from disk in `pickle` format. When users dump the state of a `Serializable` instance, the attributes of the instance whose name **does not** start with `_` will be saved on the disk. However, users can use `config` method or override `default_dump_all` attribute to prevent this feature.

Users can also override `pickle_backend` attribute to choose a pickle backend. The supported value is “`pickle`” (default and common) and “`dill`” (dump more things such as function, more information in [here](#)).

1.17.3 Example

Qlib’s serializable class includes DataHandler, DataSet, Processor and Model, etc., which are subclass of `qlib.utils.serial.Serializable`. Specifically, `qlib.data.dataset.DatasetH` is one of them. Users can serialize `DatasetH` as follows.

```
##=====dump dataset=====
dataset.to_pickle(path="dataset.pkl") # dataset is an instance of qlib.data.dataset.
↪DatasetH

##=====reload dataset=====
with open("dataset.pkl", "rb") as file_dataset:
    dataset = pickle.load(file_dataset)
```

Note: Only state of `DatasetH` should be saved on the disk, such as some `mean` and `variance` used for data normalization, etc.

After reloading the `DatasetH`, users need to reinitialize it. It means that users can reset some states of `DatasetH` or `QlibDataHandler` such as `instruments`, `start_time`, `end_time` and `segments`, etc., and generate new data according to the states (data is not state and should not be saved on the disk).

A more detailed example is in this [link](#).

1.17.4 API

Please refer to [Serializable API](#).

1.18 Task Management

1.18.1 Introduction

The [Workflow](#) part introduces how to run research workflow in a loosely-coupled way. But it can only execute one task when you use `qrun`. To automatically generate and execute different tasks, Task Management provides a whole process including [Task Generating](#), [Task Storing](#), [Task Training](#) and [Task Collecting](#). With this module, users can run their task automatically at different periods, in different losses, or even by different models.

This whole process can be used in [Online Serving](#).

An example of the entire process is shown [here](#).

1.18.2 Task Generating

A task consists of *Model*, *Dataset*, *Record*, or anything added by users. The specific task template can be viewed in [Task Section](#). Even though the task template is fixed, users can customize their `TaskGen` to generate different task by task template.

Here is the base class of `TaskGen`:

```
class qlib.workflow.task.gen.TaskGen
```

The base class for generating different tasks

Example 1:

input: a specific task template and rolling steps

output: rolling version of the tasks

Example 2:

input: a specific task template and losses list

output: a set of tasks with different losses

`generate(task: dict) → List[dict]`

Generate different tasks based on a task template

Parameters `task (dict)` – a task template

Returns A list of tasks

Return type `typing.List[dict]`

Qlib provides a class `RollingGen` to generate a list of task of the dataset in different date segments. This class allows users to verify the effect of data from different periods on the model in one experiment. More information is [here](#).

1.18.3 Task Storing

To achieve higher efficiency and the possibility of cluster operation, Task Manager will store all tasks in [MongoDB](#). `TaskManager` can fetch undone tasks automatically and manage the lifecycle of a set of tasks with error handling. Users **MUST** finish the configuration of [MongoDB](#) when using this module.

Users need to provide the MongoDB URL and database name for using TaskManager in [initialization](#) or make a statement like this.

```
from qlib.config import C
C["mongo"] = {
    "task_url" : "mongodb://localhost:27017/", # your MongoDB url
    "task_db_name" : "rolling_db" # database name
}
```

```
class qlib.workflow.task.manage.TaskManager(task_pool: str)
```

Here is what will a task looks like when it created by TaskManager

```
{
    'def': pickle serialized task definition. using pickle will make it easier
    'filter': json-like data. This is for filtering the tasks.
    'status': 'waiting' | 'running' | 'done'
    'res': pickle serialized task result,
}
```

The tasks manager assumes that you will only update the tasks you fetched. The mongo fetch one and update will make it date updating secure.

This class can be used as a tool from commandline. Here are several examples

```
python -m qlib.workflow.task.manage -t <pool_name> wait
python -m qlib.workflow.task.manage -t <pool_name> task_stat
```

Note: Assumption: the data in MongoDB was encoded and the data out of MongoDB was decoded

Here are four status which are:

STATUS_WAITING: waiting for training

STATUS_RUNNING: training

STATUS_PART_DONE: finished some step and waiting for next step

STATUS_DONE: all work done

__init__(task_pool: str)

Init Task Manager, remember to make the statement of MongoDB url and database name firstly. A TaskManager instance serves a specific task pool. The static method of this module serves the whole MongoDB.

Parameters **task_pool** (*str*) – the name of Collection in MongoDB

static list() → list

List the all collection(task_pool) of the db.

Returns list

replace_task(task, new_task)

Use a new task to replace a old one

Parameters

- **task** – old task

- **new_task** – new task

insert_task(task)

Insert a task.

Parameters `task` – the task waiting for insert

Returns `pymongo.results.InsertOneResult`

insert_task_def (`task_def`)

Insert a task to task_pool

Parameters `task_def` (`dict`) – the task definition

Returns

Return type `pymongo.results.InsertOneResult`

create_task (`task_def_l`, `dry_run=False`, `print_nt=False`) → `List[str]`

If the tasks in `task_def_l` are new, then insert new tasks into the task_pool, and record inserted_id. If a task is not new, then just query its `_id`.

Parameters

- `task_def_l` (`list`) – a list of task
- `dry_run` (`bool`) – if insert those new tasks to task pool
- `print_nt` (`bool`) – if print new task

Returns a list of the `_id` of `task_def_l`

Return type `List[str]`

fetch_task (`query={}`, `status='waiting'`) → `dict`

Use query to fetch tasks.

Parameters

- `query` (`dict, optional`) – query dict. Defaults to {}.
- `status` (`str, optional`) – [description]. Defaults to STATUS_WAITING.

Returns a task(document in collection) after decoding

Return type `dict`

safe_fetch_task (`query={}`, `status='waiting'`)

Fetch task from task_pool using query with contextmanager

Parameters `query` (`dict`) – the dict of query

Returns `dict`

Return type a task(document in collection) after decoding

query (`query={}`, `decode=True`)

Query task in collection. This function may raise exception `pymongo.errors.CursorNotFound: cursor id not found` if it takes too long to iterate the generator

Parameters

- `query` (`dict`) – the dict of query
- `decode` (`bool`) –

Returns `dict`

Return type a task(document in collection) after decoding

re_query (`_id`) → `dict`

Use `_id` to query task.

Parameters `_id` (`str`) – `_id` of a document

Returns a task(document in collection) after decoding

Return type dict

commit_task_res (*task, res, status='done'*)

Commit the result to task[‘res’].

Parameters

- **task** (*[type]*) – [description]
- **res** (*object*) – the result you want to save
- **status** (*str, optional*) – STATUS_WAITING, STATUS_RUNNING, STATUS_DONE, STATUS_PART_DONE. Defaults to STATUS_DONE.

return_task (*task, status='waiting'*)

Return a task to status. Alway using in error handling.

Parameters

- **task** (*[type]*) – [description]
- **status** (*str, optional*) – STATUS_WAITING, STATUS_RUNNING, STATUS_DONE, STATUS_PART_DONE. Defaults to STATUS_WAITING.

remove (*query={}*)

Remove the task using query

Parameters **query** (*dict*) – the dict of query

task_stat (*query={}*) → dict

Count the tasks in every status.

Parameters **query** (*dict, optional*) – the query dict. Defaults to {}.

Returns dict

reset_waiting (*query={}*)

Reset all running task into waiting status. Can be used when some running task exit unexpected.

Parameters **query** (*dict, optional*) – the query dict. Defaults to {}.

prioritize (*task, priority: int*)

Set priority for task

Parameters

- **task** (*dict*) – The task query from the database
- **priority** (*int*) – the target priority

wait (*query={}*)

When multiprocessing, the main progress may fetch nothing from TaskManager because there are still some running tasks. So main progress should wait until all tasks are trained well by other progress or machines.

Parameters **query** (*dict, optional*) – the query dict. Defaults to {}.

More information of Task Manager can be found in [here](#).

1.18.4 Task Training

After generating and storing those task, it’s time to run the task which is in the WAITING status. Qlib provides a method called `run_task` to run those task in task pool, however, users can also customize how tasks are executed.

An easy way to get the `task_func` is using `qlib.model.trainer.task_train` directly. It will run the whole workflow defined by `task`, which includes *Model*, *Dataset*, *Record*.

```
qlib.workflow.task.manage.run_task(task_func: Callable, task_pool: str, query: dict = {},  
                                    force_release: bool = False, before_status: str = 'waiting',  
                                    after_status: str = 'done', **kwargs)
```

While the task pool is not empty (has WAITING tasks), use `task_func` to fetch and run tasks in `task_pool`

After running this method, here are 4 situations (`before_status -> after_status`):

`STATUS_WAITING -> STATUS_DONE`: use `task["def"]` as `task_func` param, it means that the task has not been started

`STATUS_WAITING -> STATUS_PART_DONE`: use `task["def"]` as `task_func` param

`STATUS_PART_DONE -> STATUS_PART_DONE`: use `task["res"]` as `task_func` param, it means that the task has been started but not completed

`STATUS_PART_DONE -> STATUS_DONE`: use `task["res"]` as `task_func` param

Parameters

- **`task_func` (Callable) –**
`def (task_def, **kwargs) -> <res which will be committed>` the function to run the task
- **`task_pool` (str) –** the name of the task pool (Collection in MongoDB)
- **`query` (dict) –** will use this dict to query `task_pool` when fetching task
- **`force_release` (bool) –** will the program force to release the resource
- **`before_status` (str:) –** the tasks in `before_status` will be fetched and trained. Can be `STATUS_WAITING`, `STATUS_PART_DONE`.
- **`after_status` (str:) –** the tasks after trained will become `after_status`. Can be `STATUS_WAITING`, `STATUS_PART_DONE`.
- **`kwargs` –** the params for `task_func`

Meanwhile, Qlib provides a module called Trainer.

```
class qlib.model.trainer.Trainer
```

The trainer can train a list of models. There are Trainer and DelayTrainer, which can be distinguished by when it will finish real training.

```
__init__()
```

Initialize self. See `help(type(self))` for accurate signature.

```
train(tasks: list, *args, **kwargs) → list
```

Given a list of task definitions, begin training, and return the models.

For Trainer, it finishes real training in this method. For DelayTrainer, it only does some preparation in this method.

Parameters `tasks` – a list of tasks

Returns a list of models

Return type list

```
end_train(models: list, *args, **kwargs) → list
```

Given a list of models, finished something at the end of training if you need. The models may be Recorder, txt file, database, and so on.

For Trainer, it does some finishing touches in this method. For DelayTrainer, it finishes real training in this method.

Parameters `models` – a list of models

Returns a list of models

Return type list

`is_delay()` → bool

If Trainer will delay finishing `end_train`.

Returns if DelayTrainer

Return type bool

Trainer will train a list of tasks and return a list of model recorders. Qlib offer two kinds of Trainer, TrainerR is the simplest way and TrainerRM is based on TaskManager to help manager tasks lifecycle automatically. If you do not want to use Task Manager to manage tasks, then use TrainerR to train a list of tasks generated by TaskGen is enough. [Here](#) are the details about different Trainer.

1.18.5 Task Collecting

To collect the results of `task` after training, Qlib provides `Collector`, `Group` and `Ensemble` to collect the results in a readable, expandable and loosely-coupled way.

`Collector` can collect objects from everywhere and process them such as merging, grouping, averaging and so on. It has 2 step action including `collect` (collect anything in a dict) and `process_collect` (process collected dict).

`Group` also has 2 steps including `group` (can group a set of object based on `group_func` and change them to a dict) and `reduce` (can make a dict become an ensemble based on some rule). For example: `{(A,B,C1): object, (A,B,C2): object}` —group—> `{(A,B): {C1: object, C2: object}}` —reduce—> `{(A,B): object}`

`Ensemble` can merge the objects in an ensemble. For example: `{C1: object, C2: object}` —Ensemble—> object

So the hierarchy is `Collector`'s second step corresponds to `Group`. And `Group`'s second step correspond to `Ensemble`.

For more information, please see `Collector`, `Group` and `Ensemble`, or the [example](#).

1.19 API Reference

Here you can find all Qlib interfaces.

1.19.1 Data

Provider

```
class qlib.data.data.CalendarProvider(*args, **kwargs)
    Calendar provider base class

    Provide calendar data.

    __init__(*args, **kwargs)
        Initialize self. See help(type(self)) for accurate signature.

    calendar(start_time=None, end_time=None, freq='day', future=False)
        Get calendar of certain market in given time range.
```

Parameters

- **start_time** (*str*) – start of the time range.
- **end_time** (*str*) – end of the time range.
- **freq** (*str*) – time frequency, available: year/quarter/month/week/day.
- **future** (*bool*) – whether including future trading day.

Returns calendar list

Return type list

locate_index (*start_time*, *end_time*, *freq*, *future*)

Locate the start time index and end time index in a calendar under certain frequency.

Parameters

- **start_time** (*str*) – start of the time range.
- **end_time** (*str*) – end of the time range.
- **freq** (*str*) – time frequency, available: year/quarter/month/week/day.
- **future** (*bool*) – whether including future trading day.

Returns

- *pd.Timestamp* – the real start time.
- *pd.Timestamp* – the real end time.
- *int* – the index of start time.
- *int* – the index of end time.

class qlib.data.data.**InstrumentProvider** (**args*, ***kwargs*)

Instrument provider base class

Provide instrument data.

__init__ (**args*, ***kwargs*)

Initialize self. See help(type(self)) for accurate signature.

static instruments (*market='all'*, *filter_pipe=None*)

Get the general config dictionary for a base market adding several dynamic filters.

Parameters

- **market** (*str*) – market/industry/index shortname, e.g. all/sse/szse/sse50/csi300/csi500.
- **filter_pipe** (*list*) – the list of dynamic filters.

Returns

dict of stockpool config. {‘market’=>base market name, ‘filter_pipe’=>list of filters}

example :

Return type dict

list_instruments (*instruments*, *start_time=None*, *end_time=None*, *freq='day'*, *as_list=False*)

List the instruments based on a certain stockpool config.

Parameters

- **instruments** (*dict*) – stockpool config.

- **start_time** (*str*) – start of the time range.
- **end_time** (*str*) – end of the time range.
- **as_list** (*bool*) – return instruments as list or dict.

Returns instruments list or dictionary with time spans

Return type dict or list

```
class qlib.data.data.FeatureProvider(*args, **kwargs)
```

Feature provider class

Provide feature data.

```
__init__(*args, **kwargs)
```

Initialize self. See help(type(self)) for accurate signature.

```
feature(instrument, field, start_time, end_time, freq)
```

Get feature data.

Parameters

- **instrument** (*str*) – a certain instrument.
- **field** (*str*) – a certain field of feature.
- **start_time** (*str*) – start of the time range.
- **end_time** (*str*) – end of the time range.
- **freq** (*str*) – time frequency, available: year/quarter/month/week/day.

Returns data of a certain feature

Return type pd.Series

```
class qlib.data.data.ExpressionProvider
```

Expression provider class

Provide Expression data.

```
__init__()
```

Initialize self. See help(type(self)) for accurate signature.

```
expression(instrument, field, start_time=None, end_time=None, freq='day')
```

Get Expression data.

Parameters

- **instrument** (*str*) – a certain instrument.
- **field** (*str*) – a certain field of feature.
- **start_time** (*str*) – start of the time range.
- **end_time** (*str*) – end of the time range.
- **freq** (*str*) – time frequency, available: year/quarter/month/week/day.

Returns data of a certain expression

Return type pd.Series

```
class qlib.data.data.DatasetProvider
```

Dataset provider class

Provide Dataset data.

dataset (*instruments, fields, start_time=None, end_time=None, freq='day', inst_processors=[]*)

Get dataset data.

Parameters

- **instruments** (*list or dict*) – list/dict of instruments or dict of stockpool config.
- **fields** (*list*) – list of feature instances.
- **start_time** (*str*) – start of the time range.
- **end_time** (*str*) – end of the time range.
- **freq** (*str*) – time frequency.
- **inst_processors** (*Iterable[Union[dict, InstProcessor]]*) – the operations performed on each instrument

Returns a pandas dataframe with <instrument, datetime> index.**Return type** pd.DataFrame**static get_instruments_d** (*instruments, freq*)

Parse different types of input instruments to output instruments_d Wrong format of input instruments will lead to exception.

static get_column_names (*fields*)

Get column names from input fields

static dataset_processor (*instruments_d, column_names, start_time, end_time, freq, inst_processors=[]*)

Load and process the data, return the data set. - default using multi-kernel method.

static expression_calculator (*inst, start_time, end_time, freq, column_names, spans=None, g_config=None, inst_processors=[]*)

Calculate the expressions for one instrument, return a df result. If the expression has been calculated before, load from cache.

return value: A data frame with index ‘datetime’ and other data columns.

class qlib.data.data.**LocalCalendarProvider** (**kwargs)

Local calendar data provider class

Provide calendar data from local data source.

__init__ (**kwargs)

Initialize self. See help(type(self)) for accurate signature.

load_calendar (*freq, future*)

Load original calendar timestamp from file.

Parameters **freq** (*str*) – frequency of read calendar file.**Returns** list of timestamps**Return type** list**calendar** (*start_time=None, end_time=None, freq='day', future=False*)

Get calendar of certain market in given time range.

Parameters

- **start_time** (*str*) – start of the time range.
- **end_time** (*str*) – end of the time range.

- **freq** (*str*) – time frequency, available: year/quarter/month/week/day.
- **future** (*bool*) – whether including future trading day.

Returns calendar list

Return type list

```
class qlib.data.data.LocalInstrumentProvider(*args, **kwargs)
```

Local instrument data provider class

Provide instrument data from local data source.

```
list_instruments(instruments, start_time=None, end_time=None, freq='day', as_list=False)
```

List the instruments based on a certain stockpool config.

Parameters

- **instruments** (*dict*) – stockpool config.
- **start_time** (*str*) – start of the time range.
- **end_time** (*str*) – end of the time range.
- **as_list** (*bool*) – return instruments as list or dict.

Returns instruments list or dictionary with time spans

Return type dict or list

```
class qlib.data.data.LocalFeatureProvider(**kwargs)
```

Local feature data provider class

Provide feature data from local data source.

```
__init__(**kwargs)
```

Initialize self. See help(type(self)) for accurate signature.

```
feature(instrument, field, start_index, end_index, freq)
```

Get feature data.

Parameters

- **instrument** (*str*) – a certain instrument.
- **field** (*str*) – a certain field of feature.
- **start_time** (*str*) – start of the time range.
- **end_time** (*str*) – end of the time range.
- **freq** (*str*) – time frequency, available: year/quarter/month/week/day.

Returns data of a certain feature

Return type pd.Series

```
class qlib.data.data.LocalExpressionProvider
```

Local expression data provider class

Provide expression data from local data source.

```
expression(instrument, field, start_time=None, end_time=None, freq='day')
```

Get Expression data.

Parameters

- **instrument** (*str*) – a certain instrument.

- **field**(str) – a certain field of feature.
- **start_time**(str) – start of the time range.
- **end_time**(str) – end of the time range.
- **freq**(str) – time frequency, available: year/quarter/month/week/day.

Returns data of a certain expression

Return type pd.Series

```
class qlib.data.data.LocalDatasetProvider
```

Local dataset data provider class

Provide dataset data from local data source.

```
__init__()
```

Initialize self. See help(type(self)) for accurate signature.

```
dataset(instruments, fields, start_time=None, end_time=None, freq='day', inst_processors=[])
Get dataset data.
```

Parameters

- **instruments**(list or dict) – list/dict of instruments or dict of stockpool config.
- **fields**(list) – list of feature instances.
- **start_time**(str) – start of the time range.
- **end_time**(str) – end of the time range.
- **freq**(str) – time frequency.
- **inst_processors**(Iterable[Union[dict, InstProcessor]]) – the operations performed on each instrument

Returns a pandas dataframe with <instrument, datetime> index.

Return type pd.DataFrame

```
static multi_cache_walker(instruments, fields, start_time=None, end_time=None,
                           freq='day')
```

This method is used to prepare the expression cache for the client. Then the client will load the data from expression cache by itself.

```
static cache_walker(inst, start_time, end_time, freq, column_names)
```

If the expressions of one instrument haven't been calculated before, calculate it and write it into expression cache.

```
class qlib.data.data.ClientCalendarProvider
```

Client calendar data provider class

Provide calendar data by requesting data from server as a client.

```
__init__()
```

Initialize self. See help(type(self)) for accurate signature.

```
calendar(start_time=None, end_time=None, freq='day', future=False)
```

Get calendar of certain market in given time range.

Parameters

- **start_time**(str) – start of the time range.
- **end_time**(str) – end of the time range.

- **freq** (*str*) – time frequency, available: year/quarter/month/week/day.
- **future** (*bool*) – whether including future trading day.

Returns calendar list

Return type list

```
class qlib.data.data.ClientInstrumentProvider
```

Client instrument data provider class

Provide instrument data by requesting data from server as a client.

```
__init__()
```

Initialize self. See help(type(self)) for accurate signature.

```
list_instruments(instruments, start_time=None, end_time=None, freq='day', as_list=False)
```

List the instruments based on a certain stockpool config.

Parameters

- **instruments** (*dict*) – stockpool config.
- **start_time** (*str*) – start of the time range.
- **end_time** (*str*) – end of the time range.
- **as_list** (*bool*) – return instruments as list or dict.

Returns instruments list or dictionary with time spans

Return type dict or list

```
class qlib.data.data.ClientDatasetProvider
```

Client dataset data provider class

Provide dataset data by requesting data from server as a client.

```
__init__()
```

Initialize self. See help(type(self)) for accurate signature.

```
dataset(instruments, fields, start_time=None, end_time=None, freq='day', disk_cache=0, return_uri=False, inst_processors=[])
```

Get dataset data.

Parameters

- **instruments** (*list* or *dict*) – list/dict of instruments or dict of stockpool config.
- **fields** (*list*) – list of feature instances.
- **start_time** (*str*) – start of the time range.
- **end_time** (*str*) – end of the time range.
- **freq** (*str*) – time frequency.
- **inst_processors** (*Iterable[Union[dict, InstProcessor]]*) – the operations performed on each instrument

Returns a pandas dataframe with <instrument, datetime> index.

Return type pd.DataFrame

```
class qlib.data.data.BaseProvider
```

Local provider class

To keep compatible with old qlib provider.

```
features (instruments, fields, start_time=None, end_time=None, freq='day', disk_cache=None, inst_processors=[])
```

disk_cache [int] whether to skip(0)/use(1)/replace(2) disk_cache

This function will try to use cache method which has a keyword *disk_cache*, and will use provider method if a type error is raised because the DatasetD instance is a provider class.

```
class qlib.data.data.LocalProvider
```

```
features_uri (instruments, fields, start_time, end_time, freq, disk_cache=1)
```

Return the uri of the generated cache of features/dataset

Parameters

- **disk_cache** –
- **instruments** –
- **fields** –
- **start_time** –
- **end_time** –
- **freq** –

```
class qlib.data.data.ClientProvider
```

Client Provider

Requesting data from server as a client. Can propose requests:

- Calendar : Directly respond a list of calendars
- Instruments (without filter): Directly respond a list/dict of instruments
- Instruments (with filters): Respond a list/dict of instruments
- Features : Respond a cache uri

The general workflow is described as follows: When the user use client provider to propose a request, the client provider will connect the server and send the request. The client will start to wait for the response. The response will be made instantly indicating whether the cache is available. The waiting procedure will terminate only when the client get the reponse saying *feature_available* is true. *BUG* : Everytime we make request for certain data we need to connect to the server, wait for the response and disconnect from it. We can't make a sequence of requests within one connection. You can refer to <https://python-socketio.readthedocs.io/en/latest/client.html> for documentation of python-socketIO client.

```
__init__()
```

Initialize self. See help(type(self)) for accurate signature.

```
qlib.data.data.CalendarProviderWrapper
```

alias of *qlib.data.data.CalendarProvider*

```
qlib.data.data.InstrumentProviderWrapper
```

alias of *qlib.data.data.InstrumentProvider*

```
qlib.data.data.FeatureProviderWrapper
```

alias of *qlib.data.data.FeatureProvider*

```
qlib.data.data.ExpressionProviderWrapper
```

alias of *qlib.data.data.ExpressionProvider*

```
qlib.data.data.DatasetProviderWrapper
```

alias of *qlib.data.data.DatasetProvider*

```
qlib.data.data.BaseProviderWrapper
    alias of qlib.data.data.BaseProvider

qlib.data.data.register_all_wrappers (C)
```

Filter

```
class qlib.data.filter.BaseDFilter
    Dynamic Instruments Filter Abstract class

    Users can override this class to construct their own filter

    Override __init__ to input filter regulations

    Override filter_main to use the regulations to filter instruments

    __init__()
        Initialize self. See help(type(self)) for accurate signature.

    static from_config (config)
        Construct an instance from config dict.

        Parameters config (dict) – dict of config parameters.

    to_config()
        Construct an instance from config dict.

        Returns return the dict of config parameters.

        Return type dict
```

```
class qlib.data.filter.SeriesDFilter (fstart_time=None, fend_time=None)
    Dynamic Instruments Filter Abstract class to filter a series of certain features
```

Filters should provide parameters:

- filter start time
- filter end time
- filter rule

Override `__init__` to assign a certain rule to filter the series.

Override `_getFilterSeries` to use the rule to filter the series and get a dict of {inst => series}, or override `filter_main` for more advanced series filter rule

__init__ (*fstart_time=None, fend_time=None*)

Init function for filter base class. Filter a set of instruments based on a certain rule within a certain period assigned by `fstart_time` and `fend_time`.

Parameters

- **fstart_time** (*str*) – the time for the filter rule to start filter the instruments.
- **fend_time** (*str*) – the time for the filter rule to stop filter the instruments.

filter_main (*instruments, start_time=None, end_time=None*)
Implement this method to filter the instruments.

Parameters

- **instruments** (*dict*) – input instruments to be filtered.
- **start_time** (*str*) – start of the time range.
- **end_time** (*str*) – end of the time range.

Returns filtered instruments, same structure as input instruments.

Return type dict

class qlib.data.filter.**NameDFilter**(name_rule_re, fstart_time=None, fend_time=None)

Name dynamic instrument filter

Filter the instruments based on a regulated name format.

A name rule regular expression is required.

__init__(name_rule_re, fstart_time=None, fend_time=None)

Init function for name filter class

name_rule_re: str regular expression for the name rule.

static from_config(config)

Construct an instance from config dict.

Parameters config (dict) – dict of config parameters.

to_config()

Construct an instance from config dict.

Returns return the dict of config parameters.

Return type dict

class qlib.data.filter.**ExpressionDFilter**(rule_expression, fstart_time=None, fend_time=None, keep=False)

Expression dynamic instrument filter

Filter the instruments based on a certain expression.

An expression rule indicating a certain feature field is required.

Examples

- *basic features filter* : rule_expression = ‘\$close/\$open>5’
- *cross-sectional features filter* : rule_expression = ‘\$rank(\$close)<10’
- *time-sequence features filter* : rule_expression = ‘\$Ref(\$close, 3)>100’

__init__(rule_expression, fstart_time=None, fend_time=None, keep=False)

Init function for expression filter class

fstart_time: str filter the feature starting from this time.

fend_time: str filter the feature ending by this time.

rule_expression: str an input expression for the rule.

keep: bool whether to keep the instruments of which features don’t exist in the filter time span.

static from_config(config)

Construct an instance from config dict.

Parameters config (dict) – dict of config parameters.

to_config()

Construct an instance from config dict.

Returns return the dict of config parameters.

Return type dict

Class

```
class qlib.data.base.Expression
    Expression base class

    load(instrument, start_index, end_index, freq)
        load feature
```

Parameters

- **instrument** (*str*) – instrument code.
- **start_index** (*str*) – feature start index [in calendar].
- **end_index** (*str*) – feature end index [in calendar].
- **freq** (*str*) – feature frequency.

Returns feature series: The index of the series is the calendar index

Return type pd.Series

get_longest_back_rolling()

Get the longest length of historical data the feature has accessed

This is designed for getting the needed range of the data to calculate the features in specific range at first. However, situations like Ref(Ref(\$close, -1), 1) can not be handled rightly.

So this will only used for detecting the length of historical data needed.

get_extended_window_size()
get_extend_window_size

For to calculate this Operator in range[start_index, end_index] We have to get the *leaf feature* in range[start_index - lft_etd, end_index + rght_etd].

Returns lft_etd, rght_etd

Return type (int, int)

```
class qlib.data.base.Feature(name=None)
    Static Expression
```

This kind of feature will load data from provider

__init__(name=None)
Initialize self. See help(type(self)) for accurate signature.

get_longest_back_rolling()

Get the longest length of historical data the feature has accessed

This is designed for getting the needed range of the data to calculate the features in specific range at first. However, situations like Ref(Ref(\$close, -1), 1) can not be handled rightly.

So this will only used for detecting the length of historical data needed.

get_extended_window_size()
get_extend_window_size

For to calculate this Operator in range[start_index, end_index] We have to get the *leaf feature* in range[start_index - lft_etd, end_index + rght_etd].

Returns lft_etd, rght_etd

Return type (int, int)

```
class qlib.data.base.ExpressionOps
    Operator Expression
    This kind of feature will use operator for feature construction on the fly.
```

Operator

```
class qlib.data.ops.ElemOperator(feature)
    Element-wise Operator
        Parameters feature (Expression) – feature instance
        Returns feature operation output
        Return type Expression
    __init__(feature)
        Initialize self. See help(type(self)) for accurate signature.
    get_longest_back_rolling()
        Get the longest length of historical data the feature has accessed
        This is designed for getting the needed range of the data to calculate the features in specific range at first.
        However, situations like Ref(Ref($close, -1), 1) can not be handled rightly.
        So this will only used for detecting the length of historical data needed.
    get_extended_window_size()
        get_extend_window_size
        For to calculate this Operator in range[start_index, end_index] We have to get the leaf feature in
        range[start_index - lft_etd, end_index + rght_etd].
        Returns lft_etd, rght_etd
        Return type (int, int)
class qlib.data.ops.NpElemOperator(feature, func)
    Numpy Element-wise Operator
        Parameters
            • feature (Expression) – feature instance
            • func (str) – numpy feature operation method
        Returns feature operation output
        Return type Expression
    __init__(feature, func)
        Initialize self. See help(type(self)) for accurate signature.
class qlib.data.ops.Abs(feature)
    Feature Absolute Value
        Parameters feature (Expression) – feature instance
        Returns a feature instance with absolute output
        Return type Expression
    __init__(feature)
        Initialize self. See help(type(self)) for accurate signature.
class qlib.data.ops.Sign(feature)
    Feature Sign
        Parameters feature (Expression) – feature instance
```

Returns a feature instance with sign

Return type *Expression*

__init__(*feature*)
Initialize self. See help(type(self)) for accurate signature.

class qlib.data.ops.**Log**(*feature*)
Feature Log

Parameters **feature** (*Expression*) – feature instance

Returns a feature instance with log

Return type *Expression*

__init__(*feature*)
Initialize self. See help(type(self)) for accurate signature.

class qlib.data.ops.**Power**(*feature, exponent*)
Feature Power

Parameters **feature** (*Expression*) – feature instance

Returns a feature instance with power

Return type *Expression*

__init__(*feature, exponent*)
Initialize self. See help(type(self)) for accurate signature.

class qlib.data.ops.**Mask**(*feature, instrument*)
Feature Mask

Parameters

- **feature** (*Expression*) – feature instance
- **instrument** (*str*) – instrument mask

Returns a feature instance with masked instrument

Return type *Expression*

__init__(*feature, instrument*)
Initialize self. See help(type(self)) for accurate signature.

class qlib.data.ops.**Not**(*feature*)
Not Operator

Parameters

- **feature_left** (*Expression*) – feature instance
- **feature_right** (*Expression*) – feature instance

Returns feature elementwise not output

Return type *Feature*

__init__(*feature*)
Initialize self. See help(type(self)) for accurate signature.

class qlib.data.ops.**PairOperator**(*feature_left, feature_right*)
Pair-wise operator

Parameters

- **feature_left** (*Expression*) – feature instance or numeric value
- **feature_right** (*Expression*) – feature instance or numeric value
- **func** (*str*) – operator function

Returns two features' operation output

Return type *Feature*

__init__ (*feature_left*, *feature_right*)
Initialize self. See help(type(self)) for accurate signature.

get_longest_back_rolling()
Get the longest length of historical data the feature has accessed

This is designed for getting the needed range of the data to calculate the features in specific range at first.
However, situations like Ref(Ref(\$close, -1), 1) can not be handled rightly.

So this will only used for detecting the length of historical data needed.

get_extended_window_size()
get_extend_window_size

For to calculate this Operator in range[start_index, end_index] We have to get the *leaf feature* in range[start_index - lft_etd, end_index + rght_etd].

Returns lft_etd, rght_etd

Return type (int, int)

class qlib.data.ops.NpPairOperator (*feature_left*, *feature_right*, *func*)
Numpy Pair-wise operator

Parameters

- **feature_left** (*Expression*) – feature instance or numeric value
- **feature_right** (*Expression*) – feature instance or numeric value
- **func** (*str*) – operator function

Returns two features' operation output

Return type *Feature*

__init__ (*feature_left*, *feature_right*, *func*)
Initialize self. See help(type(self)) for accurate signature.

class qlib.data.ops.Add (*feature_left*, *feature_right*)
Add Operator

Parameters

- **feature_left** (*Expression*) – feature instance
- **feature_right** (*Expression*) – feature instance

Returns two features' sum

Return type *Feature*

__init__ (*feature_left*, *feature_right*)
Initialize self. See help(type(self)) for accurate signature.

class qlib.data.ops.Sub (*feature_left*, *feature_right*)
Subtract Operator

Parameters

- **feature_left** (*Expression*) – feature instance
- **feature_right** (*Expression*) – feature instance

Returns two features' subtraction

Return type *Feature*

__init__ (*feature_left*, *feature_right*)
Initialize self. See help(type(self)) for accurate signature.

```
class qlib.data.ops.Mul (feature_left, feature_right)
    Multiply Operator
        Parameters
            • feature_left (Expression) – feature instance
            • feature_right (Expression) – feature instance
        Returns two features' product
        Return type Feature
    __init__ (feature_left, feature_right)
        Initialize self. See help(type(self)) for accurate signature.
```



```
class qlib.data.ops.Div (feature_left, feature_right)
    Division Operator
        Parameters
            • feature_left (Expression) – feature instance
            • feature_right (Expression) – feature instance
        Returns two features' division
        Return type Feature
    __init__ (feature_left, feature_right)
        Initialize self. See help(type(self)) for accurate signature.
```



```
class qlib.data.ops.Greater (feature_left, feature_right)
    Greater Operator
        Parameters
            • feature_left (Expression) – feature instance
            • feature_right (Expression) – feature instance
        Returns greater elements taken from the input two features
        Return type Feature
    __init__ (feature_left, feature_right)
        Initialize self. See help(type(self)) for accurate signature.
```



```
class qlib.data.ops.Less (feature_left, feature_right)
    Less Operator
        Parameters
            • feature_left (Expression) – feature instance
            • feature_right (Expression) – feature instance
        Returns smaller elements taken from the input two features
        Return type Feature
    __init__ (feature_left, feature_right)
        Initialize self. See help(type(self)) for accurate signature.
```



```
class qlib.data.ops.Gt (feature_left, feature_right)
    Greater Than Operator
        Parameters
            • feature_left (Expression) – feature instance
            • feature_right (Expression) – feature instance
        Returns bool series indicate left > right
```

Return type *Feature*

__init__ (*feature_left*, *feature_right*)
Initialize self. See help(type(self)) for accurate signature.

class `qlib.data.ops.Ge` (*feature_left*, *feature_right*)
Greater Equal Than Operator
Parameters

- **feature_left** (`Expression`) – feature instance
- **feature_right** (`Expression`) – feature instance

Returns bool series indicate $left \geq right$

Return type *Feature*

__init__ (*feature_left*, *feature_right*)
Initialize self. See help(type(self)) for accurate signature.

class `qlib.data.ops.Lt` (*feature_left*, *feature_right*)
Less Than Operator
Parameters

- **feature_left** (`Expression`) – feature instance
- **feature_right** (`Expression`) – feature instance

Returns bool series indicate $left < right$

Return type *Feature*

__init__ (*feature_left*, *feature_right*)
Initialize self. See help(type(self)) for accurate signature.

class `qlib.data.ops.Le` (*feature_left*, *feature_right*)
Less Equal Than Operator
Parameters

- **feature_left** (`Expression`) – feature instance
- **feature_right** (`Expression`) – feature instance

Returns bool series indicate $left \leq right$

Return type *Feature*

__init__ (*feature_left*, *feature_right*)
Initialize self. See help(type(self)) for accurate signature.

class `qlib.data.ops.Eq` (*feature_left*, *feature_right*)
Equal Operator
Parameters

- **feature_left** (`Expression`) – feature instance
- **feature_right** (`Expression`) – feature instance

Returns bool series indicate $left == right$

Return type *Feature*

__init__ (*feature_left*, *feature_right*)
Initialize self. See help(type(self)) for accurate signature.

class `qlib.data.ops.Ne` (*feature_left*, *feature_right*)
Not Equal Operator
Parameters

- **feature_left** (`Expression`) – feature instance

- **feature_right** (`Expression`) – feature instance

Returns bool series indicate $left \neq right$

Return type `Feature`

`__init__(feature_left, feature_right)`

Initialize self. See help(type(self)) for accurate signature.

class `qlib.data.ops.And(feature_left, feature_right)`

And Operator

Parameters

- **feature_left** (`Expression`) – feature instance
- **feature_right** (`Expression`) – feature instance

Returns two features' row by row & output

Return type `Feature`

`__init__(feature_left, feature_right)`

Initialize self. See help(type(self)) for accurate signature.

class `qlib.data.ops.Or(feature_left, feature_right)`

Or Operator

Parameters

- **feature_left** (`Expression`) – feature instance
- **feature_right** (`Expression`) – feature instance

Returns two features' row by row | outputs

Return type `Feature`

`__init__(feature_left, feature_right)`

Initialize self. See help(type(self)) for accurate signature.

class `qlib.data.ops.If(condition, feature_left, feature_right)`

If Operator

Parameters

- **condition** (`Expression`) – feature instance with bool values as condition
- **feature_left** (`Expression`) – feature instance
- **feature_right** (`Expression`) – feature instance

`__init__(condition, feature_left, feature_right)`

Initialize self. See help(type(self)) for accurate signature.

get_longest_back_rolling()

Get the longest length of historical data the feature has accessed

This is designed for getting the needed range of the data to calculate the features in specific range at first. However, situations like Ref(Ref(\$close, -1), 1) can not be handled rightly.

So this will only used for detecting the length of historical data needed.

get_extended_window_size()
get_extend_window_size

For to calculate this Operator in `range[start_index, end_index]` We have to get the *leaf feature* in `range[start_index - lft_etd, end_index + rght_etd]`.

Returns lft_etd, rght_etd

Return type (int, int)

```
class qlib.data.ops.Rolling(feature, N, func)
    Rolling Operator
    Parameters
        • feature (Expression) – feature instance
        • N (int) – rolling window size
        • func (str) – rolling method

    Returns rolling outputs
    Return type Expression
__init__(feature, N, func)
    Initialize self. See help(type(self)) for accurate signature.

get_longest_back_rolling()
    Get the longest length of historical data the feature has accessed
    This is designed for getting the needed range of the data to calculate the features in specific range at first.
    However, situations like Ref(Ref($close, -1), 1) can not be handled rightly.
    So this will only used for detecting the length of historical data needed.

get_extended_window_size()
    get_extend_window_size
    For to calculate this Operator in range[start_index, end_index] We have to get the leaf feature in
    range[start_index - lft_etd, end_index + rght_etd].
    Returns lft_etd, rght_etd
    Return type (int, int)

class qlib.data.ops.Ref(feature, N)
    Feature Reference
    Parameters
        • feature (Expression) – feature instance
        • N (int) – N = 0, retrieve the first data; N > 0, retrieve data of N periods ago; N < 0,
            future data

    Returns a feature instance with target reference
    Return type Expression
__init__(feature, N)
    Initialize self. See help(type(self)) for accurate signature.

get_longest_back_rolling()
    Get the longest length of historical data the feature has accessed
    This is designed for getting the needed range of the data to calculate the features in specific range at first.
    However, situations like Ref(Ref($close, -1), 1) can not be handled rightly.
    So this will only used for detecting the length of historical data needed.

get_extended_window_size()
    get_extend_window_size
    For to calculate this Operator in range[start_index, end_index] We have to get the leaf feature in
    range[start_index - lft_etd, end_index + rght_etd].
    Returns lft_etd, rght_etd
    Return type (int, int)
```

```
class qlib.data.ops.Mean(feature, N)
    Rolling Mean (MA)

    Parameters
        • feature (Expression) – feature instance
        • N (int) – rolling window size

    Returns a feature instance with rolling average

    Return type Expression

__init__(feature, N)
    Initialize self. See help(type(self)) for accurate signature.

class qlib.data.ops.Sum(feature, N)
    Rolling Sum

    Parameters
        • feature (Expression) – feature instance
        • N (int) – rolling window size

    Returns a feature instance with rolling sum

    Return type Expression

__init__(feature, N)
    Initialize self. See help(type(self)) for accurate signature.

class qlib.data.ops.Std(feature, N)
    Rolling Std

    Parameters
        • feature (Expression) – feature instance
        • N (int) – rolling window size

    Returns a feature instance with rolling std

    Return type Expression

__init__(feature, N)
    Initialize self. See help(type(self)) for accurate signature.

class qlib.data.ops.Var(feature, N)
    Rolling Variance

    Parameters
        • feature (Expression) – feature instance
        • N (int) – rolling window size

    Returns a feature instance with rolling variance

    Return type Expression

__init__(feature, N)
    Initialize self. See help(type(self)) for accurate signature.

class qlib.data.ops.Skew(feature, N)
    Rolling Skewness

    Parameters
        • feature (Expression) – feature instance
        • N (int) – rolling window size

    Returns a feature instance with rolling skewness
```

Return type *Expression*

__init__(*feature*, *N*)
Initialize self. See help(type(self)) for accurate signature.

class `qlib.data.ops.Kurt`(*feature*, *N*)
Rolling Kurtosis

Parameters

- **feature** (*Expression*) – feature instance
- **N** (*int*) – rolling window size

Returns a feature instance with rolling kurtosis

Return type *Expression*

__init__(*feature*, *N*)
Initialize self. See help(type(self)) for accurate signature.

class `qlib.data.ops.Max`(*feature*, *N*)
Rolling Max

Parameters

- **feature** (*Expression*) – feature instance
- **N** (*int*) – rolling window size

Returns a feature instance with rolling max

Return type *Expression*

__init__(*feature*, *N*)
Initialize self. See help(type(self)) for accurate signature.

class `qlib.data.ops.IdxMax`(*feature*, *N*)
Rolling Max Index

Parameters

- **feature** (*Expression*) – feature instance
- **N** (*int*) – rolling window size

Returns a feature instance with rolling max index

Return type *Expression*

__init__(*feature*, *N*)
Initialize self. See help(type(self)) for accurate signature.

class `qlib.data.ops.Min`(*feature*, *N*)
Rolling Min

Parameters

- **feature** (*Expression*) – feature instance
- **N** (*int*) – rolling window size

Returns a feature instance with rolling min

Return type *Expression*

__init__(*feature*, *N*)
Initialize self. See help(type(self)) for accurate signature.

class `qlib.data.ops.IdxMin`(*feature*, *N*)
Rolling Min Index

Parameters

- **feature** (*Expression*) – feature instance

- **N** (*int*) – rolling window size

Returns a feature instance with rolling min index

Return type *Expression*

__init__ (*feature*, *N*)
Initialize self. See help(type(self)) for accurate signature.

class qlib.data.ops.**Quantile** (*feature*, *N*, *qscore*)
Rolling Quantile

Parameters

- **feature** (*Expression*) – feature instance
- **N** (*int*) – rolling window size

Returns a feature instance with rolling quantile

Return type *Expression*

__init__ (*feature*, *N*, *qscore*)
Initialize self. See help(type(self)) for accurate signature.

class qlib.data.ops.**Med** (*feature*, *N*)
Rolling Median

Parameters

- **feature** (*Expression*) – feature instance
- **N** (*int*) – rolling window size

Returns a feature instance with rolling median

Return type *Expression*

__init__ (*feature*, *N*)
Initialize self. See help(type(self)) for accurate signature.

class qlib.data.ops.**Mad** (*feature*, *N*)
Rolling Mean Absolute Deviation

Parameters

- **feature** (*Expression*) – feature instance
- **N** (*int*) – rolling window size

Returns a feature instance with rolling mean absolute deviation

Return type *Expression*

__init__ (*feature*, *N*)
Initialize self. See help(type(self)) for accurate signature.

class qlib.data.ops.**Rank** (*feature*, *N*)
Rolling Rank (Percentile)

Parameters

- **feature** (*Expression*) – feature instance
- **N** (*int*) – rolling window size

Returns a feature instance with rolling rank

Return type *Expression*

__init__ (*feature*, *N*)
Initialize self. See help(type(self)) for accurate signature.

class qlib.data.ops.**Count** (*feature*, *N*)

Rolling Count

Parameters

- **feature** (*Expression*) – feature instance
- **N** (*int*) – rolling window size

Returns a feature instance with rolling count of number of non-NaN elements

Return type *Expression*

__init__ (*feature*, *N*)

Initialize self. See help(type(self)) for accurate signature.

class qlib.data.ops.**Delta** (*feature*, *N*)

Rolling Delta

Parameters

- **feature** (*Expression*) – feature instance
- **N** (*int*) – rolling window size

Returns a feature instance with end minus start in rolling window

Return type *Expression*

__init__ (*feature*, *N*)

Initialize self. See help(type(self)) for accurate signature.

class qlib.data.ops.**Slope** (*feature*, *N*)

Rolling Slope

Parameters

- **feature** (*Expression*) – feature instance
- **N** (*int*) – rolling window size

Returns a feature instance with linear regression slope of given window

Return type *Expression*

__init__ (*feature*, *N*)

Initialize self. See help(type(self)) for accurate signature.

class qlib.data.ops.**Rsquare** (*feature*, *N*)

Rolling R-value Square

Parameters

- **feature** (*Expression*) – feature instance
- **N** (*int*) – rolling window size

Returns a feature instance with linear regression r-value square of given window

Return type *Expression*

__init__ (*feature*, *N*)

Initialize self. See help(type(self)) for accurate signature.

class qlib.data.ops.**Resi** (*feature*, *N*)

Rolling Regression Residuals

Parameters

- **feature** (*Expression*) – feature instance
- **N** (*int*) – rolling window size

Returns a feature instance with regression residuals of given window

Return type *Expression*

__init__(*feature*, *N*)
Initialize self. See help(type(self)) for accurate signature.

class `qlib.data.ops.WMA`(*feature*, *N*)
Rolling WMA
Parameters

- **feature** (*Expression*) – feature instance
- **N** (*int*) – rolling window size

Returns a feature instance with weighted moving average output

Return type *Expression*

__init__(*feature*, *N*)
Initialize self. See help(type(self)) for accurate signature.

class `qlib.data.ops.EMA`(*feature*, *N*)
Rolling Exponential Mean (EMA)
Parameters

- **feature** (*Expression*) – feature instance
- **N** (*int*, *float*) – rolling window size

Returns a feature instance with regression r-value square of given window

Return type *Expression*

__init__(*feature*, *N*)
Initialize self. See help(type(self)) for accurate signature.

class `qlib.data.ops.PairRolling`(*feature_left*, *feature_right*, *N*, *func*)
Pair Rolling Operator
Parameters

- **feature_left** (*Expression*) – feature instance
- **feature_right** (*Expression*) – feature instance
- **N** (*int*) – rolling window size

Returns a feature instance with rolling output of two input features

Return type *Expression*

__init__(*feature_left*, *feature_right*, *N*, *func*)
Initialize self. See help(type(self)) for accurate signature.

get_longest_back_rolling()
Get the longest length of historical data the feature has accessed

This is designed for getting the needed range of the data to calculate the features in specific range at first. However, situations like Ref(Ref(\$close, -1), 1) can not be handled rightly.

So this will only used for detecting the length of historical data needed.

get_extended_window_size()
get_extend_window_size

For to calculate this Operator in range[start_index, end_index] We have to get the *leaf feature* in range[start_index - lft_etd, end_index + rght_etd].

Returns lft_etd, rght_etd

Return type (*int*, *int*)

```
class qlib.data.ops.Corr(feature_left, feature_right, N)
Rolling Correlation
Parameters
    • feature_left (Expression) – feature instance
    • feature_right (Expression) – feature instance
    • N (int) – rolling window size

Returns a feature instance with rolling correlation of two input features

Return type Expression
__init__(feature_left, feature_right, N)
Initialize self. See help(type(self)) for accurate signature.

class qlib.data.ops.Cov(feature_left, feature_right, N)
Rolling Covariance
Parameters
    • feature_left (Expression) – feature instance
    • feature_right (Expression) – feature instance
    • N (int) – rolling window size

Returns a feature instance with rolling max of two input features

Return type Expression
__init__(feature_left, feature_right, N)
Initialize self. See help(type(self)) for accurate signature.

class qlib.data.ops.OpsWrapper
Ops Wrapper
__init__()
Initialize self. See help(type(self)) for accurate signature.

register(ops_list: List[Union[Type[qlib.data.base.ExpressionOps], dict]])
register operator

Parameters ops_list (List \[Union\[Type\[ExpressionOps\], dict\]\]) –
    • if type(ops_list) is List[Type[ExpressionOps]], each element of ops_list represents
        the operator class, which should be the subclass of ExpressionOps.
    • if type(ops_list) is List[dict], each element of ops_list represents the config of operator, which has the

        { “class”: class_name, “module_path”: path,
        } Note: class should be the class name of operator, module_path should be a
        python module or path of file.

qlib.data.ops.register_all_ops(C)
register all operator
```

Cache

```
class qlib.data.cache.MemCacheUnit(*args, **kwargs)
Memory Cache Unit.

__init__(*args, **kwargs)
Initialize self. See help(type(self)) for accurate signature.
```

limited

whether memory cache is limited

```
class qlib.data.cache.MemCache (mem_cache_size_limit=None, limit_type='length')  
Memory cache.
```

```
__init__ (mem_cache_size_limit=None, limit_type='length')
```

Parameters

- **mem_cache_size_limit** (*cache max size.*) –
- **limit_type** (*length or sizeof; length(call fun: len), sizeof(call fun: sys.getsizeof())*) –

```
class qlib.data.cache.ExpressionCache (provider)
```

Expression cache mechanism base class.

This class is used to wrap expression provider with self-defined expression cache mechanism.

Note: Override the *_uri* and *_expression* method to create your own expression cache mechanism.

```
expression (instrument, field, start_time, end_time, freq)  
Get expression data.
```

Note: Same interface as *expression* method in expression provider

```
update (cache_uri: Union[str, pathlib.Path], freq: str = 'day')  
Update expression cache to latest calendar.
```

Overide this method to define how to update expression cache corresponding to users' own cache mechanism.

Parameters

- **cache_uri** (*str or Path*) – the complete uri of expression cache file (include dir path).
- **freq** (*str*) –

Returns 0(successful update)/ 1(no need to update)/ 2(update failure).

Return type int

```
class qlib.data.cache.DatasetCache (provider)
```

Dataset cache mechanism base class.

This class is used to wrap dataset provider with self-defined dataset cache mechanism.

Note: Override the *_uri* and *_dataset* method to create your own dataset cache mechanism.

```
dataset (instruments, fields, start_time=None, end_time=None, freq='day', disk_cache=1, inst_processors=[])  
Get feature dataset.
```

Note: Same interface as *dataset* method in dataset provider

Note: The server use redis_lock to make sure read-write conflicts will not be triggered but client readers are not considered.

update (*cache_uri*: Union[str, *pathlib.Path*], *freq*: str = 'day')

Update dataset cache to latest calendar.

Overide this method to define how to update dataset cache corresponding to users' own cache mechanism.

Parameters

- **cache_uri** (str or Path) – the complete uri of dataset cache file (include dir path).
- **freq** (str) –

Returns 0(successful update)/ 1(no need to update)/ 2(update failure)

Return type int

static **cache_to_origin_data** (*data*, *fields*)

cache data to origin data

Parameters

- **data** – pd.DataFrame, cache data.
- **fields** – feature fields.

Returns pd.DataFrame.

static **normalize_uri_args** (*instruments*, *fields*, *freq*)

normalize uri args

class qlib.data.cache.**DiskExpressionCache** (*provider*, **kwargs)

Prepared cache mechanism for server.

__init__ (*provider*, **kwargs)

Initialize self. See help(type(self)) for accurate signature.

gen_expression_cache (*expression_data*, *cache_path*, *instrument*, *field*, *freq*, *last_update*)

use bin file to save like feature-data.

update (*sid*, *cache_uri*, *freq*: str = 'day')

Update expression cache to latest calendar.

Overide this method to define how to update expression cache corresponding to users' own cache mechanism.

Parameters

- **cache_uri** (str or Path) – the complete uri of expression cache file (include dir path).
- **freq** (str) –

Returns 0(successful update)/ 1(no need to update)/ 2(update failure).

Return type int

class qlib.data.cache.**DiskDatasetCache** (*provider*, **kwargs)

Prepared cache mechanism for server.

__init__ (*provider*, **kwargs)

Initialize self. See help(type(self)) for accurate signature.

```
classmethod read_data_from_cache (cache_path: Union[str, pathlib.Path], start_time,
                                end_time, fields)
read_cache_from
```

This function can read data from the disk cache dataset

Parameters

- **cache_path** –
- **start_time** –
- **end_time** –
- **fields** – The fields order of the dataset cache is sorted. So rearrange the columns to make it consistent.

Returns

```
class IndexManager (cache_path: Union[str, pathlib.Path])
```

The lock is not considered in the class. Please consider the lock outside the code. This class is the proxy of the disk data.

```
__init__ (cache_path: Union[str, pathlib.Path])
```

Initialize self. See help(type(self)) for accurate signature.

```
gen_dataset_cache (cache_path: Union[str, pathlib.Path], instruments, fields, freq,
                    inst_processors=[])
```

Note: This function does not consider the cache read write lock. Please

Aquire the lock outside this function

The format the cache contains 3 parts(followed by typical filename).

- index : cache/d41366901e25de3ec47297f12e2ba11d.index
 - The content of the file may be in following format(pandas.Series)

	start	end
1999-11-10	00:00:00	0 1
1999-11-11	00:00:00	1 2
1999-11-12	00:00:00	2 3
...		

Note: The start is closed. The end is open!!!!

- Each line contains two element <start_index, end_index> with a timestamp as its index.
- It indicates the *start_index*‘(included) and ‘*end_index*‘(excluded) of the data for ‘timestamp

- meta data: cache/d41366901e25de3ec47297f12e2ba11d.meta
- data : cache/d41366901e25de3ec47297f12e2ba11d
 - This is a hdf file sorted by datetime

Parameters

- **cache_path** – The path to store the cache.
- **instruments** – The instruments to store the cache.
- **fields** – The fields to store the cache.
- **freq** – The freq to store the cache.
- **inst_processors** – Instrument processors.

:return type pd.DataFrame; The fields of the returned DataFrame are consistent with the parameters of the function.

update(cache_uri, freq: str = 'day')

Update dataset cache to latest calendar.

Overide this method to define how to update dataset cache corresponding to users' own cache mechanism.

Parameters

- **cache_uri** (str or Path) – the complete uri of dataset cache file (include dir path).
- **freq**(str) –

Returns 0(successful update)/ 1(no need to update)/ 2(update failure)

Return type int

Storage

class qlib.data.storage.**BaseStorage**

class qlib.data.storage.**CalendarStorage**(freq: str, future: bool, **kwargs)

The behavior of CalendarStorage's methods and List's methods of the same name remain consistent

__init__(freq: str, future: bool, **kwargs)

Initialize self. See help(type(self)) for accurate signature.

data

get all data

Raises ValueError – If the data(storage) does not exist, raise ValueError

index(value: str) → int

Raises ValueError – If the data(storage) does not exist, raise ValueError

class qlib.data.storage.**InstrumentStorage**(market: str, **kwargs)

__init__(market: str, **kwargs)

Initialize self. See help(type(self)) for accurate signature.

data

get all data

Raises ValueError – If the data(storage) does not exist, raise ValueError

update([E], **F) → None. Update D from mapping/iterable E and F.

Notes

If E present and has a .keys() method, does: for k in E: D[k] = E[k]

If E present and lacks .keys() method, does: for (k, v) in E: D[k] = v

In either case, this is followed by: for k, v in F.items(): D[k] = v

```
class qlib.data.storage.FeatureStorage (instrument: str, field: str, freq: str,  
**kwargs)
```

```
__init__ (instrument: str, field: str, freq: str, **kwargs)
```

Initialize self. See help(type(self)) for accurate signature.

```
data
```

get all data

Notes

if data(storage) does not exist, return empty pd.Series: *return pd.Series(dtype=np.float32)*

```
start_index
```

get FeatureStorage start index

Notes

If the data(storage) does not exist, return None

```
end_index
```

get FeatureStorage end index

Notes

The right index of the data range (both sides are closed)

The next data appending point will be *end_index + 1*

If the data(storage) does not exist, return None

```
write (data_array: Union[List[T], numpy.ndarray, Tuple], index: int = None)
```

Write *data_array* to FeatureStorage starting from *index*.

Notes

If *index* is None, append *data_array* to feature.

If len(*data_array*) == 0; return

If (*index* - self.end_index) >= 1, self[end_index+1: index] will be filled with np.nan

Examples

```
rebase (start_index: int = None, end_index: int = None)
```

Rebase the *start_index* and *end_index* of the FeatureStorage.

start_index and *end_index* are closed intervals: [start_index, end_index]

Examples

```
rewrite (data: Union[List[T], numpy.ndarray, Tuple], index: int)
    overwrite all data in FeatureStorage with data

Parameters
    • data (Union[List, np.ndarray, Tuple]) – data
    • index (int) – data start index

class qlib.data.storage.file_storage.FileStorageMixin

check ()
    check self.uri

Raises ValueError

class qlib.data.storage.file_storage.FileCalendarStorage (freq: str, future: bool,
    **kwargs)

__init__ (freq: str, future: bool, **kwargs)
    Initialize self. See help(type(self)) for accurate signature.

data
    get all data

Raises ValueError – If the data(storage) does not exist, raise ValueError

index (value: str) → int

Raises ValueError – If the data(storage) does not exist, raise ValueError

class qlib.data.storage.file_storage.FileInstrumentStorage (market: str,
    **kwargs)

__init__ (market: str, **kwargs)
    Initialize self. See help(type(self)) for accurate signature.

data
    get all data

Raises ValueError – If the data(storage) does not exist, raise ValueError

update ([E], **F) → None. Update D from mapping/iterable E and F.
```

Notes

If E present and has a .keys() method, does: for k in E: D[k] = E[k]

If E present and lacks .keys() method, does: for (k, v) in E: D[k] = v

In either case, this is followed by: for k, v in F.items(): D[k] = v

```
class qlib.data.storage.file_storage.FileFeatureStorage (instrument: str, field: str,
    freq: str, **kwargs)

__init__ (instrument: str, field: str, freq: str, **kwargs)
    Initialize self. See help(type(self)) for accurate signature.

data
    get all data
```

Notes

if data(storage) does not exist, return empty pd.Series: `return pd.Series(dtype=np.float32)`

write (`data_array: Union[List[T], numpy.ndarray]`, `index: int = None`) → `None`
Write `data_array` to FeatureStorage starting from `index`.

Notes

If `index` is `None`, append `data_array` to feature.

If `len(data_array) == 0`; return

If `(index - self.end_index) >= 1`, `self[end_index+1: index]` will be filled with `np.nan`

Examples

start_index

get FeatureStorage start index

Notes

If the `data(storage)` does not exist, return `None`

end_index

get FeatureStorage end index

Notes

The right index of the data range (both sides are closed)

The next data appending point will be `end_index + 1`

If the `data(storage)` does not exist, return `None`

Dataset

Dataset Class

class `qlib.data.dataset.__init__.Dataset(**kwargs)`

Preparing data for model training and inferencing.

__init__(kwargs)**

init is designed to finish following steps:

- **init the sub instance and the state of the dataset(info to prepare the data)**

- The name of essential state for preparing data should not start with ‘_’ so that it could be serialized on disk when serializing.

- **setup data**

- The data related attributes’ names should start with ‘_’ so that it will not be saved on disk when serializing.

The data could specify the info to calculate the essential data for preparation

config (**kwargs)

config is designed to configure and parameters that cannot be learned from the data

setup_data (**kwargs)

Setup the data.

We split the setup_data function for following situation:

- User have a Dataset object with learned status on disk.
- User load the Dataset object from the disk.
- User call *setup_data* to load new data.
- User prepare data for model based on previous status.

prepare (**kwargs) → object

The type of dataset depends on the model. (It could be pd.DataFrame, pytorch.DataLoader, etc.) The parameters should specify the scope for the prepared data The method should:

- process the data

- return the processed data

Returns return the object

Return type object

```
class qlib.data.dataset.__init__.DatasetH(handler: Union[Dict[KT, VT], qlib.data.dataset.handler.DataHandler], segments: Dict[str, Tuple], **kwargs)
```

Dataset with Data(H)andler

User should try to put the data preprocessing functions into handler. Only following data processing functions should be placed in Dataset:

- The processing is related to specific model.
- The processing is related to data split.

```
__init__(handler: Union[Dict[KT, VT], qlib.data.dataset.handler.DataHandler], segments: Dict[str, Tuple], **kwargs)
```

Setup the underlying data.

Parameters

- **handler** (*Union[dict, DataHandler]*) – handler could be:
 - instance of *DataHandler*
 - config of *DataHandler*. Please refer to *DataHandler*
- **segments** (*dict*) – Describe the options to segment the data. Here are some examples:

```
config(handler_kwargs: dict = None, **kwargs)
```

Initialize the DatasetH

Parameters

- **handler_kwargs** (*dict*) – Config of DataHandler, which could include the following arguments:
 - arguments of DataHandler.conf_data, such as ‘instruments’, ‘start_time’ and ‘end_time’.
- **kwargs** (*dict*) – Config of DatasetH, such as
 - **segments** [*dict*] Config of segments which is same as ‘segments’ in self.__init__

setup_data (*handler_kwargs*: *dict* = *None*, ***kwargs*)

Setup the Data

Parameters **handler_kwargs** (*dict*) – init arguments of DataHandler, which could include the following arguments:

- *init_type* : Init Type of Handler
- *enable_cache* : whether to enable cache

prepare (*segments*: Union[List[str], Tuple[str], str, slice], *col_set*='*all*', *data_key*='infer', ***kwargs*) → Union[List[pandas.core.frame.DataFrame], pandas.core.frame.DataFrame]

Prepare the data for learning and inference.

Parameters

- **segments** (Union[List[Text], Tuple[Text], Text, slice]) – Describe the scope of the data to be prepared. Here are some examples:
 - 'train'
 - ['train', 'valid']
- **col_set** (str) – The col_set will be passed to self.handler when fetching data.
- **data_key** (str) – The data to fetch: DK_* Default is DK_I, which indicate fetching data for **inference**.
- **kwargs** –

The parameters that *kwargs* may contain:

flt_col [str] It only exists in TSDatasetH, can be used to add a column of data(True or False) to filter data. This parameter is only supported when it is an instance of TSDatasetH.

Returns

Return type Union[List[pd.DataFrame], pd.DataFrame]

Raises NotImplementedError:

```
class qlib.data.dataset.__init__.TSDatasampler(data: pandas.core.frame.DataFrame,
                                                start, end, step_len: int, fillna_type: str
                                                = 'none', dtype=None, flt_data=None)
```

(T)ime-(S)eries DataSampler This is the result of TSDatasetH

It works like *torch.data.utils.Dataset*, it provides a very convenient interface for constructing time-series dataset based on tabular data. - On time step dimension, the smaller index indicates the historical data and the larger index indicates the future data.

If user have further requirements for processing data, user could process them based on *TSDatasampler* or create more powerful subclasses.

Known Issues: - For performance issues, this Sampler will convert dataframe into arrays for better performance. This could result

in a different data type

```
__init__(data: pandas.core.frame.DataFrame, start, end, step_len: int, fillna_type: str = 'none',
        dtype=None, flt_data=None)
```

Build a dataset which looks like *torch.data.utils.Dataset*.

Parameters

- **data** (pd.DataFrame) – The raw tabular data

- **start** – The indexable start time
- **end** – The indexable end time
- **step_len** (*int*) – The length of the time-series step
- **fillna_type** (*int*) – How will qlib handle the sample if there is no sample in a specific date. none:
 - fill with np.nan
- ffill:** ffill with previous sample
- ffill+bfill:** ffill with previous samples first and fill with later samples second
- **flt_data** (*pd.Series*) – a column of data(True or False) to filter data. None:
 - keep all data

`get_index()`

Get the pandas index of the data, it will be useful in following scenarios - Special sampler will be used (e.g. user want to sample day by day)

static build_index (*data*: *pandas.core.frame.DataFrame*) → Tu-
ple[*pandas.core.frame.DataFrame*, *dict*]

The relation of the data

Parameters **data** (*pd.DataFrame*) – The dataframe with <datetime, DataFrame>

Returns

- 1) **the first element: reshape the original index into a <datetime(row), instrument(column)> 2D datafram**
instrument SH600000 SH600004 SH600006 SH600007 SH600008 SH600009
... datetime 2021-01-11 0 1 2 3 4 5 ... 2021-01-12 4146 4147 4148 4149
4150 4151 ... 2021-01-13 8293 8294 8295 8296 8297 8298 ... 2021-01-14
12441 12442 12443 12444 12445 12446 ...
- 2) the second element: {<original index>: <row, col>}

Return type Tuple[*pd.DataFrame*, *dict*]

class *qlib.data.dataset.__init__.TSDatasetH* (*step_len=30, **kwargs*)
(T)ime-(S)eries Dataset (H)andler

Convert the tabular data to Time-Series data

Requirements analysis

The typical workflow of a user to get time-series data for an sample - process features - slice proper data from data handler: dimension of sample <feature, > - Build relation of samples by <time, instrument> index

- Be able to sample times series of data <timestep, feature>
- It will be better if the interface is like “torch.utils.data.Dataset”
- **User could build customized batch based on the data**

– The dimension of a batch of data <batch_idx, feature, timestep>

__init__ (*step_len=30, **kwargs*)
Setup the underlying data.

Parameters

- **handler** (*Union[dict, DataHandler]*) – handler could be:
 - instance of *DataHandler*

- config of *DataHandler*. Please refer to *DataHandler*
- **segments** (*dict*) – Describe the options to segment the data. Here are some examples:

config (**kwargs)
Initialize the DatasetH

Parameters

- **handler_kwargs** (*dict*) – Config of DataHandler, which could include the following arguments:
 - arguments of DataHandler.conf_data, such as ‘instruments’, ‘start_time’ and ‘end_time’.
- **kwargs** (*dict*) – Config of DatasetH, such as
 - **segments** [*dict*] Config of segments which is same as ‘segments’ in *self.__init__*

setup_data (**kwargs)
Setup the Data

Parameters handler_kwargs (*dict*) – init arguments of DataHandler, which could include the following arguments:

- **init_type** : Init Type of Handler
- **enable_cache** : whether to enable cache

Data Loader

class qlib.data.dataset.loader.**DataLoader**

DataLoader is designed for loading raw data from original data source.

load (*instruments*, *start_time=None*, *end_time=None*) → pandas.core.frame.DataFrame
load the data as pd.DataFrame.

Example of the data (The multi-index of the columns is optional.):

feature					
		label	\$close	\$volume	Ref(\$close, 1) Mean(
→	→		\$close	\$volume	Ref(\$close, 1) Mean(
→	→		\$close, 3)	\$high-\$low	LABEL0
datetime	instrument				
2010-01-04	SH600000	81.807068	17145150.0	83.737389	
→	83.016739	2.741058	0.0032		
	SH600004	13.313329	11800983.0	13.313329	
→	13.317701	0.183632	0.0042		
	SH600005	37.796539	12231662.0	38.258602	
→	37.919757	0.970325	0.0289		

Parameters

- **instruments** (*str or dict*) – it can either be the market name or the config file of instruments generated by InstrumentProvider.
- **start_time** (*str*) – start of the time range.
- **end_time** (*str*) – end of the time range.

Returns data load from the under layer source

Return type pd.DataFrame

```
class qlib.data.dataset.loader.DLWPParser(config: Union[list, tuple, dict])  
(D)ata(L)oader (W)ith (P)arser for features and names
```

Extracting this class so that QlibDataLoader and other dataloaders(such as QdbDataLoader) can share the fields.

```
__init__(config: Union[list, tuple, dict])
```

Parameters config (Union[list, tuple, dict]) – Config will be used to describe the fields and column names

```
load_group_df(instruments, exprs: list, names: list, start_time: Union[str, pandas._libs.tslibs.timestamps.Timestamp] = None, end_time: Union[str, pandas._libs.tslibs.timestamps.Timestamp] = None, gp_name: str = None) → pandas.core.frame.DataFrame  
load the dataframe for specific group
```

Parameters

- **instruments** – the instruments.
- **exprs** (list) – the expressions to describe the content of the data.
- **names** (list) – the name of the data.

Returns the queried dataframe.

Return type pd.DataFrame

```
load(instruments=None, start_time=None, end_time=None) → pandas.core.frame.DataFrame  
load the data as pd.DataFrame.
```

Example of the data (The multi-index of the columns is optional.):

		feature			
↪		label			
↪\$close, 3)	\$high-\$low	LABEL0			
datetime	instrument				
2010-01-04	SH600000	81.807068	17145150.0	83.737389	
↪ 83.016739	2.741058	0.0032			
	SH600004	13.313329	11800983.0	13.313329	
↪ 13.317701	0.183632	0.0042			
	SH600005	37.796539	12231662.0	38.258602	
↪ 37.919757	0.970325	0.0289			

Parameters

- **instruments** (str or dict) – it can either be the market name or the config file of instruments generated by InstrumentProvider.
- **start_time** (str) – start of the time range.
- **end_time** (str) – end of the time range.

Returns data load from the under layer source

Return type pd.DataFrame

```
class qlib.data.dataset.loader.QlibDataLoader(config: Tuple[list, tuple, dict], filter_pipe: List[T] = None, swap_level: bool = True, freq: Union[str, dict] = 'day', inst_processor: dict = None)
```

Same as QlibDataLoader. The fields can be define by config

```
__init__(config: Tuple[list, tuple, dict], filter_pipe: List[T] = None, swap_level: bool = True, freq: Union[str, dict] = 'day', inst_processor: dict = None)
```

Parameters

- **config** (*Tuple[list, tuple, dict]*) – Please refer to the doc of DLW-Parser
- **filter_pipe** – Filter pipe for the instruments
- **swap_level** – Whether to swap level of MultiIndex
- **freq** (*dict or str*) – If type(config) == dict and type(freq) == str, load config data using freq. If type(config) == dict and type(freq) == dict, load config[<group_name>] data using freq[<group_name>]
- **inst_processor** (*dict*) – If inst_processor is not None and type(config) == dict; load config[<group_name>] data using inst_processor[<group_name>]

```
load_group_df(instruments, exprs: list, names: list, start_time: Union[str, pandas._libs.tslibs.timestamps.Timestamp] = None, end_time: Union[str, pandas._libs.tslibs.timestamps.Timestamp] = None, gp_name: str = None) → pandas.core.frame.DataFrame
```

load the dataframe for specific group

Parameters

- **instruments** – the instruments.
- **exprs** (*list*) – the expressions to describe the content of the data.
- **names** (*list*) – the name of the data.

Returns the queried dataframe.

Return type pd.DataFrame

```
class qlib.data.dataset.loader.StaticDataLoader(config: dict, join='outer')
```

DataLoader that supports loading data from file or as provided.

```
__init__(config: dict, join='outer')
```

Parameters

- **config** (*dict*) – {fields_group: <path or object>}
- **join** (*str*) – How to align different dataframes

```
load(instruments=None, start_time=None, end_time=None) → pandas.core.frame.DataFrame
```

load the data as pd.DataFrame.

Example of the data (The multi-index of the columns is optional.):

	feature				
→	label				
	\$close	\$volume	Ref(\$close, 1)	Mean(
→\$close, 3)	\$high-\$low	LABEL0			
datetime	instrument				
2010-01-04	SH600000	81.807068	17145150.0	83.737389	
→83.016739	2.741058	0.0032			
					(continues on next page)

(continued from previous page)

SH600004	13.313329	11800983.0	13.313329	
↪ 13.317701	0.183632	0.0042		
SH600005	37.796539	12231662.0	38.258602	
↪ 37.919757	0.970325	0.0289		

Parameters

- **instruments** (*str or dict*) – it can either be the market name or the config file of instruments generated by InstrumentProvider.
- **start_time** (*str*) – start of the time range.
- **end_time** (*str*) – end of the time range.

Returns data load from the under layer source

Return type pd.DataFrame

```
class qlib.data.dataset.loader.DataLoaderDH(handler_config: dict, fetch_kwargs: dict = {}, is_group=False)
```

DataLoader based on (D)ata (H)andler It is designed to load multiple data from data handler - If you just want to load data from single datahandler, you can write them in single data handler

TODO: What make this module not that easy to use. - For online scenario

- The underlayer data handler should be configured. But data loader doesn't provide such interface & hook.
- ```
__init__(handler_config: dict, fetch_kwargs: dict = {}, is_group=False)
```

### Parameters

- **handler\_config** (*dict*) – handler\_config will be used to describe the handlers
- **fetch\_kwargs** (*dict*) – fetch\_kwargs will be used to describe the different arguments of fetch method, such as col\_set, squeeze, data\_key, etc.
- **is\_group** (*bool*) – is\_group will be used to describe whether the key of handler\_config is group

```
load(instruments=None, start_time=None, end_time=None) → pandas.core.frame.DataFrame
```

load the data as pd.DataFrame.

Example of the data (The multi-index of the columns is optional.):

|            |             |              |                 |            |
|------------|-------------|--------------|-----------------|------------|
|            | feature     |              |                 |            |
| ↪          | label       |              |                 |            |
|            | \$close     | \$volume     | Ref(\$close, 1) | Mean(      |
| ↪          | \$close, 3) | \$high-\$low | LABEL0          |            |
|            | datetime    | instrument   |                 |            |
| 2010-01-04 | SH600000    | 81.807068    | 17145150.0      | 83.737389  |
| ↪          | 83.016739   | 2.741058     | 0.0032          |            |
|            |             | SH600004     | 13.313329       | 11800983.0 |
| ↪          | 13.317701   | 0.183632     | 0.0042          | 13.313329  |
|            |             | SH600005     | 37.796539       | 12231662.0 |
| ↪          | 37.919757   | 0.970325     | 0.0289          | 38.258602  |

### Parameters

- **instruments** (*str or dict*) – it can either be the market name or the config file of instruments generated by InstrumentProvider.

- **start\_time** (*str*) – start of the time range.
- **end\_time** (*str*) – end of the time range.

**Returns** data load from the under layer source

**Return type** pd.DataFrame

## Data Handler

```
class qlib.data.dataset.handler.DataHandler(instruments=None, start_time=None,
 end_time=None, data_loader: Union[dict,
 str, qlib.data.dataset.loader.DataLoader] =
 None, init_data=True, fetch_orig=True)
```

The steps to using a handler 1. initialized data handler (call by *init*). 2. use the data.

The data handler try to maintain a handler with 2 level. *datetime & instruments*.

Any order of the index level can be supported (The order will be implied in the data). The order *<datetime, instruments>* will be used when the dataframe index name is missed.

Example of the data: The multi-index of the columns is optional.

| feature               |           |            |                 |                  |
|-----------------------|-----------|------------|-----------------|------------------|
| label                 | \$close   | \$volume   | Ref(\$close, 1) | Mean(\$close, 3) |
| → \$high-\$low LABEL0 |           |            |                 |                  |
| datetime instrument   |           |            |                 |                  |
| 2010-01-04 SH600000   | 81.807068 | 17145150.0 | 83.737389       | 83.016739        |
| → 2.741058 0.0032     |           |            |                 |                  |
|                       | SH600004  | 13.313329  | 11800983.0      | 13.313329        |
| → 0.183632 0.0042     |           |            |                 |                  |
|                       | SH600005  | 37.796539  | 12231662.0      | 38.258602        |
| → 0.970325 0.0289     |           |            |                 |                  |

Tips for improving the performance of datahandler - Fetching data with *col\_set=CS\_RAW* will return the raw data and may avoid pandas from copying the data when calling *loc*

```
__init__(instruments=None, start_time=None, end_time=None, data_loader: Union[dict, str,
qlib.data.dataset.loader.DataLoader] = None, init_data=True, fetch_orig=True)
```

### Parameters

- **instruments** – The stock list to retrieve.
- **start\_time** – start\_time of the original data.
- **end\_time** – end\_time of the original data.
- **data\_loader** (*Union[dict, str, DataLoader]*) – data loader to load the data.
- **init\_data** – initialize the original data in the constructor.
- **fetch\_orig** (*bool*) – Return the original data instead of copy if possible.

```
config(**kwargs)
```

configuration of data. # what data to be loaded from data source

This method will be used when loading pickled handler from dataset. The data will be initialized with different time range.

**setup\_data** (*enable\_cache: bool = False*)

Set Up the data in case of running initialization for multiple time

It is responsible for maintaining following variable 1) self.\_data

**Parameters** **enable\_cache** (*bool*) – default value is false:

- if *enable\_cache == True*:

the processed data will be saved on disk, and handler will load the cached data from the disk directly when we call *init* next time

**fetch** (*selector: Union[pandas.\_libs.tslibs.timestamps.Timestamp, slice, str] = slice(None, None, None)*, *level: Union[str, int] = 'datetime'*, *col\_set: Union[str, List[str]] = '\_\_all'*, *squeeze: bool = False*, *proc\_func: Callable = None*) → pandas.core.frame.DataFrame  
fetch data from underlying data source

**Parameters**

• **selector** (*Union[pd.Timestamp, slice, str]*) – describe how to select data by index

• **level** (*Union[str, int]*) – which index level to select the data

• **col\_set** (*Union[str, List[str]]*) –

- if *isinstance(col\_set, str)*:

select a set of meaningful columns.(e.g. features, columns)

**if col\_set == CS\_RAW:** the raw dataset will be returned.

- if *isinstance(col\_set, List[str])*:

select several sets of meaningful columns, the returned data has multiple levels

• **proc\_func** (*Callable*) –

- Give a hook for processing data before fetching

**An example to explain the necessity of the hook:**

- A Dataset learned some processors to process data which is related to data segmentation

- It will apply them every time when preparing data.

- The learned processor require the dataframe remains the same format when fitting and applying

- However the data format will change according to the parameters.

- So the processors should be applied to the underlayer data.

• **squeeze** (*bool*) – whether squeeze columns and index

**Returns**

**Return type** pd.DataFrame.

**get\_cols** (*col\_set='\_\_all'*) → list

get the column names

**Parameters** **col\_set** (*str*) – select a set of meaningful columns.(e.g. features, columns)

**Returns** list of column names

**Return type** list

---

**get\_range\_selector** (*cur\_date*: *Union[pandas.\_libs.tslibs.timestamps.Timestamp, str]*, *periods*: *int*) → slice  
get range selector by number of periods

**Parameters**

- **cur\_date** (*pd.Timestamp* or *str*) – current date
- **periods** (*int*) – number of periods

**get\_range\_iterator** (*periods*: *int*, *min\_periods*: *Optional[int]* = *None*, *\*\*kwargs*)  
→ *Iterator[Tuple[pandas.\_libs.tslibs.timestamps.Timestamp, pandas.core.frame.DataFrame]]*  
get a iterator of sliced data with given periods

**Parameters**

- **periods** (*int*) – number of periods.
- **min\_periods** (*int*) – minimum periods for sliced dataframe.
- **kwargs** (*dict*) – will be passed to *self.fetch*.

```
class qlib.data.dataset.handler.DataHandlerLP (instruments=None,
 start_time=None, end_time=None,
 data_loader: Union[dict, str,
qnib.data.dataset.loader.DataLoader] = None, infer_processors: List[T] = [],
 learn_processors: List[T] = [], shared_processors: List[T] = [],
 process_type='append', drop_raw=False,
 **kwargs)
```

**DataHandler with (L)earnable (P)rocessor**

Tips to improving the performance of data handler - To reduce the memory cost

- *drop\_raw=True*: this will modify the data inplace on raw data;

```
__init__ (instruments=None, start_time=None, end_time=None, data_loader: Union[dict, str, qnib.data.dataset.loader.DataLoader] = None, infer_processors: List[T] = [], learn_processors: List[T] = [], shared_processors: List[T] = [], process_type='append', drop_raw=False, **kwargs)
```

**Parameters**

- **infer\_processors** (*list*) –
    - list of <description info> of processors to generate data for inference
    - example of <description info>:
  - **learn\_processors** (*list*) – similar to *infer\_processors*, but for generating data for learning models
  - **process\_type** (*str*) – PTYPE\_I = ‘independent’
    - self.\_infer will processed by *infer\_processors*
    - self.\_learn will be processed by *learn\_processors*
- PTYPE\_A = ‘append’
- self.\_infer will processed by *infer\_processors*
  - self.\_learn will be processed by *infer\_processors* + *learn\_processors*
  - \* (e.g. self.\_infer processed by *learn\_processors* )

- **drop\_raw** (*bool*) – Whether to drop the raw data

**fit()**

fit data without processing the data

**fit\_process\_data()**

fit and process data

The input of the *fit* will be the output of the previous processor

**process\_data** (*with\_fit: bool = False*)

process\_data data. Run *processor.fit* if necessary

Notation: (data) [processor]

# data processing flow of self.process\_type == DataHandlerLP.PTYPE\_I (self.\_data)-[shared\_processors]-(\_shared\_df)-[learn\_processors]-(\_learn\_df)

-[infer\_processors]-(\_infer\_df)

# data processing flow of self.process\_type == DataHandlerLP.PTYPE\_A (self.\_data)-[shared\_processors]-(\_shared\_df)-[infer\_processors]-(\_infer\_df)-[learn\_processors]-(\_learn\_df)

**Parameters with\_fit** (*bool*) – The input of the *fit* will be the output of the previous processor

**config** (*processor\_kwargs: dict = None, \*\*kwargs*)

configuration of data. # what data to be loaded from data source

This method will be used when loading pickled handler from dataset. The data will be initialized with different time range.

**setup\_data** (*init\_type: str = 'fit\_seq', \*\*kwargs*)

Set up the data in case of running initialization for multiple time

**Parameters**

- **init\_type** (*str*) – The type *IT\_\** listed above.

- **enable\_cache** (*bool*) – default value is false:

– if *enable\_cache == True*:

the processed data will be saved on disk, and handler will load the cached data from the disk directly when we call *init* next time

**fetch** (*selector: Union[pandas.\_libs.tslibs.timestamps.Timestamp, slice, str] = slice(None, None,*

*None), level: Union[str, int] = 'datetime', col\_set='\_\_all\_\_', data\_key: str = 'infer', proc\_func:*

*Callable = None*) → pandas.core.frame.DataFrame

fetch data from underlying data source

**Parameters**

- **selector** (*Union[pd.Timestamp, slice, str]*) – describe how to select data by index.

- **level** (*Union[str, int]*) – which index level to select the data.

- **col\_set** (*str*) – select a set of meaningful columns.(e.g. features, columns).

- **data\_key** (*str*) – the data to fetch: *DK\_\**.

- **proc\_func** (*Callable*) – please refer to the doc of DataHandler.fetch

**Returns**

**Return type** pd.DataFrame

---

**get\_cols** (*col\_set='\_\_all'*, *data\_key: str = 'infer'*) → list  
get the column names

**Parameters**

- **col\_set** (*str*) – select a set of meaningful columns.(e.g. features, columns).
- **data\_key** (*str*) – the data to fetch: DK\_\*.

**Returns** list of column names

**Return type** list

## Processor

`qlib.data.dataset.processor.get_group_columns (df: pandas.core.frame.DataFrame, group: Optional[str])`

get a group of columns from multi-index columns DataFrame

**Parameters**

- **df** (*pd.DataFrame*) – with multi of columns.
- **group** (*str*) – the name of the feature group, i.e. the first level value of the group index.

**class** `qlib.data.dataset.processor.Processor`

**fit** (*df: pandas.core.frame.DataFrame = None*)

learn data processing parameters

**Parameters** **df** (*pd.DataFrame*) – When we fit and process data with processor one by one. The fit function reiles on the output of previous processor, i.e. *df*.

**is\_for\_infer** () → bool

Is this processor usable for inference Some processors are not usable for inference.

**Returns** if it is usable for infenrece.

**Return type** bool

**readonly** () → bool

Does the processor treat the input data readonly (i.e. does not write the input data) when processing

Knowing the readonly information is helpful to the Handler to avoid uncessary copy

**config** (\*\*kwargs)

configure the serializable object

**Parameters**

- **dump\_all** (*bool*) – will the object dump all object
- **exclude** (*list*) – What attribute will not be dumped
- **recursive** (*bool*) – will the configuration be recursive

**class** `qlib.data.dataset.processor.DropnaProcessor (fields_group=None)`

**\_\_init\_\_** (*fields\_group=None*)

Initialize self. See help(type(self)) for accurate signature.

```
readonly()
 Does the processor treat the input data readonly (i.e. does not write the input data) when processing
 Knowing the readonly information is helpful to the Handler to avoid unnecessary copy

class qlib.data.dataset.processor.DropnaLabel (fields_group='label')
```

```
__init__ (fields_group='label')
 Initialize self. See help(type(self)) for accurate signature.

is_for_infer () → bool
 The samples are dropped according to label. So it is not usable for inference
```

```
class qlib.data.dataset.processor.DropCol (col_list=[])
```

```
__init__ (col_list=[])
 Initialize self. See help(type(self)) for accurate signature.

readonly()
 Does the processor treat the input data readonly (i.e. does not write the input data) when processing
 Knowing the readonly information is helpful to the Handler to avoid unnecessary copy
```

```
class qlib.data.dataset.processor.FilterCol (fields_group='feature', col_list=[])
```

```
__init__ (fields_group='feature', col_list=[])
 Initialize self. See help(type(self)) for accurate signature.

readonly()
 Does the processor treat the input data readonly (i.e. does not write the input data) when processing
 Knowing the readonly information is helpful to the Handler to avoid unnecessary copy
```

```
class qlib.data.dataset.processor.TanhProcess
 Use tanh to process noise data
```

```
class qlib.data.dataset.processor.ProcessInf
 Process infinity
```

```
class qlib.data.dataset.processor.Fillna (fields_group=None, fill_value=0)
 Process NaN
```

```
__init__ (fields_group=None, fill_value=0)
 Initialize self. See help(type(self)) for accurate signature.
```

```
class qlib.data.dataset.processor.MinMaxNorm (fit_start_time, fit_end_time, fields_group=None)
```

```
__init__ (fit_start_time, fit_end_time, fields_group=None)
 Initialize self. See help(type(self)) for accurate signature.
```

```
fit (df)
 learn data processing parameters
```

**Parameters** *df* (*pd.DataFrame*) – When we fit and process data with processor one by one. The fit function reiles on the output of previous processor, i.e. *df*.

```
class qlib.data.dataset.processor.ZScoreNorm (fit_start_time, fit_end_time, fields_group=None)
```

ZScore Normalization

---

```

__init__(fit_start_time, fit_end_time, fields_group=None)
 Initialize self. See help(type(self)) for accurate signature.

fit(df)
 learn data processing parameters

Parameters df (pd.DataFrame) – When we fit and process data with processor one by
one. The fit function reiles on the output of previous processor, i.e. df.

class qlib.data.dataset.processor.RobustZScoreNorm(fit_start_time, fit_end_time,
 fields_group=None,
 clip_outlier=True)

Robust ZScore Normalization
Use robust statistics for Z-Score normalization: mean(x) = median(x) std(x) = MAD(x) * 1.4826
Reference: https://en.wikipedia.org/wiki/Median_absolute_deviation.
__init__(fit_start_time, fit_end_time, fields_group=None, clip_outlier=True)
 Initialize self. See help(type(self)) for accurate signature.

fit(df)
 learn data processing parameters

Parameters df (pd.DataFrame) – When we fit and process data with processor one by
one. The fit function reiles on the output of previous processor, i.e. df.

class qlib.data.dataset.processor.CSZScoreNorm(fields_group=None)

Cross Sectional ZScore Normalization

__init__(fields_group=None)
 Initialize self. See help(type(self)) for accurate signature.

class qlib.data.dataset.processor.CSRankNorm(fields_group=None)

Cross Sectional Rank Normalization

__init__(fields_group=None)
 Initialize self. See help(type(self)) for accurate signature.

class qlib.data.dataset.processor.CSZFillna(fields_group=None)

Cross Sectional Fill Nan

__init__(fields_group=None)
 Initialize self. See help(type(self)) for accurate signature.

```

## 1.19.2 Contrib

### Model

```

class qlib.model.base.BaseModel
 Modeling things

 predict(*args, **kwargs) → object
 Make predictions after modeling things

class qlib.model.base.Model
 Learnable Models

 fit(dataset: qlib.data.dataset.Dataset)
 Learn model from the base model

```

---

**Note:** The attribute names of learned model should *not* start with ‘\_’. So that the model could be dumped to disk.

---

The following code example shows how to retrieve *x\_train*, *y\_train* and *w\_train* from the *dataset*:

```
get features and labels
df_train, df_valid = dataset.prepare(
 ["train", "valid"], col_set=["feature", "label"], data_
 ↪key=DataHandlerLP.DK_L
)
x_train, y_train = df_train["feature"], df_train["label"]
x_valid, y_valid = df_valid["feature"], df_valid["label"]

get weights
try:
 wdf_train, wdf_valid = dataset.prepare(["train", "valid"], col_
 ↪set=["weight"],
 data_key=DataHandlerLP.
 ↪DK_L)
 w_train, w_valid = wdf_train["weight"], wdf_valid["weight"]
except KeyError as e:
 w_train = pd.DataFrame(np.ones_like(y_train.values), index=y_
 ↪train.index)
 w_valid = pd.DataFrame(np.ones_like(y_valid.values), index=y_
 ↪valid.index)
```

**Parameters** **dataset** (`Dataset`) – dataset will generate the processed data from model training.

**predict** (*dataset*: `qlib.data.dataset.Dataset`, *segment*: `Union[str, slice] = 'test'`) → object  
give prediction given Dataset

#### Parameters

- **dataset** (`Dataset`) – dataset will generate the processed dataset from model training.
- **segment** (`Text or slice`) – dataset will use this segment to prepare data. (default=test)

#### Returns

**Return type** Prediction results with certain type such as `pandas.Series`.

**class** `qlib.model.base.ModelFT`

Model (F)ine(t)unable

**finetune** (*dataset*: `qlib.data.dataset.Dataset`)

finetune model based given dataset

A typical use case of finetuning model with `qlib.workflow.R`

```
start exp to train init model
with R.start(experiment_name="init models"):
 model.fit(dataset)
 R.save_objects(init_model=model)
 rid = R.get_recorder().id
```

(continues on next page)

(continued from previous page)

```
Finetune model based on previous trained model
with R.start(experiment_name="finetune model"):
 recorder = R.get_recorder(recorder_id=rid, experiment_name="init models")
 model = recorder.load_object("init_model")
 model.finetune(dataset, num_boost_round=10)
```

**Parameters** `dataset` (`Dataset`) – dataset will generate the processed dataset from model training.

## Strategy

```
class qlib.contrib.strategy.strategy.StrategyWrapper(inner_strategy)
```

StrategyWrapper is a wrapper of another strategy. By overriding some methods to make some changes on the basic strategy Cost control and risk control will base on this class.

```
__init__(inner_strategy)
```

**Parameters** `inner_strategy` – set the inner strategy.

```
class qlib.contrib.strategy.strategy.AdjustTimer
```

Responsible for timing of position adjusting

This is designed as multiple inheritance mechanism due to: - the `is_adjust` may need access to the internal state of a strategy.

- it can be regarded as an enhancement to the existing strategy.

```
is_adjust(trade_date)
```

Return if the strategy can adjust positions on `trade_date`. Will normally be used in strategy do trading with trade frequency

```
class qlib.contrib.strategy.strategy.ListAdjustTimer(adjust_dates=None)
```

```
__init__(adjust_dates=None)
```

**Parameters** `adjust_dates` – an iterable object, it will return a timelist for trading dates

```
is_adjust(trade_date)
```

Return if the strategy can adjust positions on `trade_date`. Will normally be used in strategy do trading with trade frequency

```
class qlib.contrib.strategy.strategy.WeightStrategyBase(order_generator_cls_or_obj=<class
 'qlib.contrib.strategy.order_generator.OrderGenWI'>,
 *args, **kwargs)
```

```
__init__(order_generator_cls_or_obj=<class 'qlib.contrib.strategy.order_generator.OrderGenWInteract'>,
 *args, **kwargs)
```

Initialize self. See help(type(self)) for accurate signature.

```
generate_target_weight_position(score, current, trade_date)
```

Generate target position from score for this date and the current position. The cash is not considered in the position

### Parameters

- `score` (`pd.Series`) – pred score for this trade date, index is stock\_id, contain ‘score’ column.
- `current` (`Position()`) – current position.

- **trade\_date** (*pd.Timestamp*) – trade date.

**generate\_order\_list** (*score\_series*, *current*, *trade\_exchange*, *pred\_date*, *trade\_date*)

**Parameters**

- **score\_series** (*pd.Series*) – stock\_id , score.
- **current** (*Position()*) – current of account.
- **trade\_exchange** (*Exchange()*) – exchange.
- **trade\_date** (*pd.Timestamp*) – date.

```
class qlib.contrib.strategy.strategy.TopkDropoutStrategy(topk, n_drop,
 method_sell='bottom',
 method_buy='top',
 risk_degree=0.95,
 thresh=1, hold_thresh=1,
 only_tradable=False,
 **kwargs)
```

**\_\_init\_\_** (*topk*, *n\_drop*, *method\_sell*=*'bottom'*, *method\_buy*=*'top'*, *risk\_degree*=*0.95*, *thresh*=*1*, *hold\_thresh*=*1*, *only\_tradable*=*False*, *\*\*kwargs*)

**Parameters**

- **topk** (*int*) – the number of stocks in the portfolio.
- **n\_drop** (*int*) – number of stocks to be replaced in each trading date.
- **method\_sell** (*str*) – dropout method\_sell, random/bottom.
- **method\_buy** (*str*) – dropout method\_buy, random/top.
- **risk\_degree** (*float*) – position percentage of total value.
- **thresh** (*int*) – minimun holding days since last buy singal of the stock.
- **hold\_thresh** (*int*) – minimum holding days before sell stock , will check *current.get\_stock\_count(order.stock\_id) >= self.thresh*.
- **only\_tradable** (*bool*) – will the strategy only consider the tradable stock when buying and selling. if *only\_tradable*:  
the strategy will peek at the information in the short future to avoid untradable stocks (untradable stocks include stocks that meet suspension, or hit limit up or limit down).

**else:** the strategy will generate orders without peeking any information in the future, so the order generated by the strategies may fail.

**get\_risk\_degree** (*date*)

Return the proportion of your total value you will used in investment. Dynamically risk\_degree will result in Market timing.

**generate\_order\_list** (*score\_series*, *current*, *trade\_exchange*, *pred\_date*, *trade\_date*)

Generate order list according to *score\_series* at *trade\_date*, will not change *current*.

**Parameters**

- **score\_series** (*pd.Series*) – stock\_id , score.
- **current** (*Position()*) – current of account.

- **trade\_exchange** (*Exchange ()*) – exchange.
- **pred\_date** (*pd.Timestamp*) – predict date.
- **trade\_date** (*pd.Timestamp*) – trade date.

## Evaluate

```
qlib.contrib.evaluate.risk_analysis (r, N=252)
```

Risk Analysis

### Parameters

- **r** (*pandas.Series*) – daily return series.
- **N** (*int*) – scaler for annualizing information\_ratio (day: 250, week: 50, month: 12).

```
qlib.contrib.evaluate.backtest (pred, account=1000000000.0, shift=1, benchmark='SH000905', verbose=True, **kwargs)
```

This function will help you set a reasonable Exchange and provide default value for strategy :param - **backtest workflow related or common arguments**: :param pred: predict should has <datetime, instrument> index and one score column. :type pred: pandas.DataFrame :param account: init account value. :type account: float :param shift: whether to shift prediction by one day. :type shift: int :param benchmark: benchmark code, default is SH000905 CSI 500. :type benchmark: str :param verbose: whether to print log. :type verbose: bool :param - **strategy related arguments**: :param strategy: strategy used in backtest. :type strategy: Strategy() :param topk: top-N stocks to buy. :type topk: int (Default value: 50) :param margin:

- if isinstance(margin, int):

```
 sell_limit = margin
```

- else:

```
 sell_limit = pred_in_a_day.count() * margin
```

buffer margin, in single score\_mode, continue holding stock if it is in nlargest(sell\_limit). sell\_limit should be no less than topk.

### Parameters

- **n\_drop** (*int*) – number of stocks to be replaced in each trading date.
- **risk\_degree** (*float*) – 0-1, 0.95 for example, use 95% money to trade.
- **str\_type** ('amount', 'weight' or 'dropout') – strategy type: Top-kAmountStrategy ,TopkWeightStrategy or TopkDropoutStrategy.
- **exchange related arguments** (-) –
- **exchange** (*Exchange ()*) – pass the exchange for speeding up.
- **subscribe\_fields** (*list*) – subscribe fields.
- **open\_cost** (*float*) – open transaction cost. The default value is 0.002(0.2%).
- **close\_cost** (*float*) – close transaction cost. The default value is 0.002(0.2%).
- **min\_cost** (*float*) – min transaction cost.
- **trade\_unit** (*int*) – 100 for China A.
- **deal\_price** (*str*) – dealing price type: 'close', 'open', 'vwap'.
- **limit\_threshold** (*float*) – limit move 0.1 (10%) for example, long and short with same limit.

- **extract\_codes** (*bool*) – will we pass the codes extracted from the pred to the exchange.

---

**Note:** This will be faster with offline qlib.

---

- **executor related arguments** (-) –
- **executor** (*BaseExecutor()*) – executor used in backtest.
- **verbose** (*bool*) – whether to print log.

```
qlib.contrib.evaluate.long_short_backtest (pred, topk=50, deal_price=None, shift=1,
open_cost=0, close_cost=0, trade_unit=None,
limit_threshold=None, min_cost=5, subscribe_fields=[], extract_codes=False)
```

A backtest for long-short strategy

#### Parameters

- **pred** – The trading signal produced on day  $T$ .
- **topk** – The short topk securities and long topk securities.
- **deal\_price** – The price to deal the trading.
- **shift** – Whether to shift prediction by one day. The trading day will be  $T+1$  if  $\text{shift}==1$ .
- **open\_cost** – open transaction cost.
- **close\_cost** – close transaction cost.
- **trade\_unit** – 100 for China A.
- **limit\_threshold** – limit move 0.1 (10%) for example, long and short with same limit.
- **min\_cost** – min transaction cost.
- **subscribe\_fields** – subscribe fields.
- **extract\_codes** – bool. will we pass the codes extracted from the pred to the exchange. NOTE: This will be faster with offline qlib.

#### Returns

The result of backtest, it is represented by a dict. { “long”: long\_returns(excess),  
”short”: short\_returns(excess), “long\_short”: long\_short\_returns }

## Report

```
qlib.contrib.report.analysis_position.report.report_graph (report_df: pandas.core.frame.DataFrame,
show_notebook: bool = True) → [<class 'list'>,
<class 'tuple'>]
```

display backtest report

Example:

```

from qlib.contrib.evaluate import backtest
from qlib.contrib.strategy import TopkDropoutStrategy

backtest parameters
bparas = {}
bparas['limit_threshold'] = 0.095
bparas['account'] = 1000000000

sparas = {}
sparas['topk'] = 50
sparas['n_drop'] = 230
strategy = TopkDropoutStrategy(**sparas)

report_normal_df, _ = backtest(pred_df, strategy, **bparas)

qcr.analysis_position.report_graph(report_normal_df)

```

### Parameters

- **report\_df** – `df.index.name` must be `date`, `df.columns` must contain `return`, `turnover`, `cost`, `bench`.

|            | <code>return</code> | <code>cost</code> | <code>bench</code> | <code>turnover</code> |
|------------|---------------------|-------------------|--------------------|-----------------------|
| date       |                     |                   |                    |                       |
| 2017-01-04 | 0.003421            | 0.000864          | 0.011693           | 0.576325              |
| 2017-01-05 | 0.000508            | 0.000447          | 0.000721           | 0.227882              |
| 2017-01-06 | -0.003321           | 0.000212          | -0.004322          | 0.102765              |
| 2017-01-09 | 0.006753            | 0.000212          | 0.006874           | 0.105864              |
| 2017-01-10 | -0.000416           | 0.000440          | -0.003350          | 0.208396              |

- **show\_notebook** – whether to display graphics in notebook, the default is `True`.

**Returns** if `show_notebook` is `True`, display in notebook; else return `plotly.graph_objs.Figure` list.

```

qlib.contrib.report.analysis_position.score_ic.score_ic_graph(pred_label: pandas.core.frame.DataFrame,
 show_notebook:
 bool = True) →
[<class 'list'>,
 <class 'tuple'>]

```

### score IC

Example:

```

from qlib.data import D
from qlib.contrib.report import analysis_position
pred_df_dates = pred_df.index.get_level_values(level='datetime'
 ↵')
features_df = D.features(D.instruments('csi500'), ['Ref($close,
 ↵ -2)/Ref($close, -1)-1'], pred_df_dates.min(), pred_df_dates.
 ↵max())
features_df.columns = ['label']
pred_label = pd.concat([features_df, pred], axis=1, sort=True).
 ↵reindex(features_df.index)
analysis_position.score_ic_graph(pred_label)

```

### Parameters

- **pred\_label** – index is `pd.MultiIndex`, index name is [`instrument`, `datetime`]; columns names is [`score`, `label`].

| instrument | datetime   | score     | label     |
|------------|------------|-----------|-----------|
| SH600004   | 2017-12-11 | -0.013502 | -0.013502 |
|            | 2017-12-12 | -0.072367 | -0.072367 |
|            | 2017-12-13 | -0.068605 | -0.068605 |
|            | 2017-12-14 | 0.012440  | 0.012440  |
|            | 2017-12-15 | -0.102778 | -0.102778 |

- **show\_notebook** – whether to display graphics in notebook, the default is **True**.

**Returns** if show\_notebook is True, display in notebook; else return **plotly.graph\_objs.Figure** list.

```
qlib.contrib.report.analysis_position.cumulative_return.cumulative_return_graph(position:
 dict,
 re-
 port_normal:
 pan-
 das.core.frame.
 la-
 bel_data:
 pan-
 das.core.frame.
 show_notebook:
 start_date=None,
 end_date=None,
 →
 It-
 er-
 able[plotly.grap
```

Backtest buy, sell, and holding cumulative return graph

Example:

```
from qlib.data import D
from qlib.contrib.evaluate import risk_analysis, backtest,
 ↪long_short_backtest
from qlib.contrib.strategy import TopkDropoutStrategy

backtest parameters
bparas = {}
bparas['limit_threshold'] = 0.095
bparas['account'] = 10000000000

sparas = {}
sparas['topk'] = 50
sparas['n_drop'] = 5
strategy = TopkDropoutStrategy(**sparas)

report_normal_df, positions = backtest(pred_df, strategy,
 ↪**bparas)

pred_df_dates = pred_df.index.get_level_values(level='datetime
 ↪')
features_df = D.features(D.instruments('csi500'), ['Ref($close,
 ↪ -1)/$close - 1'], pred_df_dates.min(), pred_df_dates.max())
features_df.columns = ['label']

qcr.analysis_position.cumulative_return_graph(positions,
 ↪report_normal_df, features_df)
```

**Graph desc:**

- Axis X: Trading day.
- Axis Y:
- Above axis Y:  $((Ref(\$close, -1) / \$close - 1) * weight).sum() / weight.sum()).cumsum()$ .
- Below axis Y: Daily weight sum.
- In the **sell** graph,  $y < 0$  stands for profit; in other cases,  $y > 0$  stands for profit.
- In the **buy\_minus\_sell** graph, the **y** value of the **weight** graph at the bottom is  $buy\_weight + sell\_weight$ .
- In each graph, the **red line** in the histogram on the right represents the average.

**Parameters**

- **position** – position data
- **report\_normal** –

|            | <b>return</b> | cost     | bench     | turnover |
|------------|---------------|----------|-----------|----------|
| date       |               |          |           |          |
| 2017-01-04 | 0.003421      | 0.000864 | 0.011693  | 0.576325 |
| 2017-01-05 | 0.000508      | 0.000447 | 0.000721  | 0.227882 |
| 2017-01-06 | -0.003321     | 0.000212 | -0.004322 | 0.102765 |
| 2017-01-09 | 0.006753      | 0.000212 | 0.006874  | 0.105864 |
| 2017-01-10 | -0.000416     | 0.000440 | -0.003350 | 0.208396 |

- **label\_data** –  $D.features$  result; index is  $pd.MultiIndex$ , index name is [*instrument*, *datetime*]; columns names is [*label*].

The **label T** is the change from **T** to **T+1**, it is recommended to use **close**, example:  
 $D.features(D.instruments('csi500'), ['Ref(\$close, -1) / \$close - 1'])$

|            |            | label     |
|------------|------------|-----------|
| instrument | datetime   |           |
| SH600004   | 2017-12-11 | -0.013502 |
|            | 2017-12-12 | -0.072367 |
|            | 2017-12-13 | -0.068605 |
|            | 2017-12-14 | 0.012440  |
|            | 2017-12-15 | -0.102778 |

**Parameters**

- **show\_notebook** – True or False. If True, show graph in notebook, else return figures
- **start\_date** – start date
- **end\_date** – end date

**Returns**

```
qlib.contrib.report.analysis_position.risk_analysis_graph(analysis_df:
 pan-
 das.core.frame.DataFrame
 =
 None,
 re-
 port_normal_df:
 pan-
 das.core.frame.DataFrame
 =
 None,
 re-
 port_long_short_df:
 pan-
 das.core.frame.DataFrame
 =
 None,
 show_notebook:
 bool
 =
 True)
→
It-
er-
able[plotly.graph_objs._fig]
```

Generate analysis graph and monthly analysis

Example:

```
from qlib.contrib.evaluate import risk_analysis, backtest,
 ↪long_short_backtest
from qlib.contrib.strategy import TopkDropoutStrategy
from qlib.contrib.report import analysis_position

backtest parameters
bparas = {}
bparas['limit_threshold'] = 0.095
bparas['account'] = 1000000000

sparas = {}
sparas['topk'] = 50
sparas['n_drop'] = 230
strategy = TopkDropoutStrategy(**sparas)

report_normal_df, positions = backtest(pred_df, strategy,
 ↪**bparas)
long_short_map = long_short_backtest(pred_df)
report_long_short_df = pd.DataFrame(long_short_map)

analysis = dict()
analysis['pred_long'] = risk_analysis(report_long_short_df[
 ↪'long'])
analysis['pred_short'] = risk_analysis(report_long_short_df[
 ↪'short'])
analysis['pred_long_short'] = risk_analysis(report_long_
 ↪short_df['long_short'])
analysis['excess_return_without_cost'] = risk_analysis(report_
 ↪normal_df['return'] - report_normal_df['bench'])
```

(continues on next page)

(continued from previous page)

```

analysis['excess_return_with_cost'] = risk_analysis(report_
 ↪normal_df['return'] - report_normal_df['bench'] - report_
 ↪normal_df['cost'])
analysis_df = pd.concat(analysis)

analysis_position.risk_analysis_graph(analysis_df, report_
 ↪normal_df)

```

## Parameters

- **analysis\_df** – analysis data, index is **pd.MultiIndex**; columns names is **[risk]**.

|                            |                   | risk      |
|----------------------------|-------------------|-----------|
| excess_return_without_cost | mean              | 0.000692  |
|                            | std               | 0.005374  |
|                            | annualized_return | 0.174495  |
|                            | information_ratio | 2.045576  |
|                            | max_drawdown      | -0.079103 |
| excess_return_with_cost    | mean              | 0.000499  |
|                            | std               | 0.005372  |
|                            | annualized_return | 0.125625  |
|                            | information_ratio | 1.473152  |
|                            | max_drawdown      | -0.088263 |

- **report\_normal\_df** – df.index.name must be **date**, df.columns must contain **return, turnover, cost, bench**.

|            | return    | cost     | bench     | turnover |
|------------|-----------|----------|-----------|----------|
| date       |           |          |           |          |
| 2017-01-04 | 0.003421  | 0.000864 | 0.011693  | 0.576325 |
| 2017-01-05 | 0.000508  | 0.000447 | 0.000721  | 0.227882 |
| 2017-01-06 | -0.003321 | 0.000212 | -0.004322 | 0.102765 |
| 2017-01-09 | 0.006753  | 0.000212 | 0.006874  | 0.105864 |
| 2017-01-10 | -0.000416 | 0.000440 | -0.003350 | 0.208396 |

- **report\_long\_short\_df** – df.index.name must be **date**, df.columns contain **long, short, long\_short**.

|            | long      | short     | long_short |
|------------|-----------|-----------|------------|
| date       |           |           |            |
| 2017-01-04 | -0.001360 | 0.001394  | 0.000034   |
| 2017-01-05 | 0.002456  | 0.000058  | 0.002514   |
| 2017-01-06 | 0.000120  | 0.002739  | 0.002859   |
| 2017-01-09 | 0.001436  | 0.001838  | 0.003273   |
| 2017-01-10 | 0.000824  | -0.001944 | -0.001120  |

- **show\_notebook** – Whether to display graphics in a notebook, default **True**. If True, show graph in notebook If False, return graph figure

## Returns

```
qlib.contrib.report.analysis_position.rank_label.rank_label_graph(position:
 dict, la-
 bel_data:
 pan-
 das.core.frame.DataFrame,
 start_date=None,
 end_date=None,
 show_notebook=True)
 → Iter-
 able[plotly.graph_objs._figure.Figure]
```

Ranking percentage of stocks buy, sell, and holding on the trading day. Average rank-ratio(similar to `sell_df['label'].rank(ascending=False) / len(sell_df)`) of daily trading

Example:

```
from qlib.data import D
from qlib.contrib.evaluate import backtest
from qlib.contrib.strategy import TopkDropoutStrategy

backtest parameters
bparas = {}
bparas['limit_threshold'] = 0.095
bparas['account'] = 1000000000

sparas = {}
sparas['topk'] = 50
sparas['n_drop'] = 230
strategy = TopkDropoutStrategy(**sparas)

_, positions = backtest(pred_df, strategy, **bparas)

pred_df_dates = pred_df.index.get_level_values(level='datetime'
 ↪')
features_df = D.features(D.instruments('csi500'), ['Ref($close,
 ↪ -1)/$close-1'], pred_df_dates.min(), pred_df_dates.max())
features_df.columns = ['label']

qcr.analysis_position.rank_label_graph(positions, features_df,
 ↪pred_df_dates.min(), pred_df_dates.max())
```

## Parameters

- **position** – position data; `qlib.contrib.backtest.backtest` result.
- **label\_data** – `D.features` result; index is `pd.MultiIndex`, index name is `[instrument, datetime]`; columns names is `[label]`.

The **label T** is the change from **T** to **T+1**, it is recommended to use `close`, example: `D.features(D.instruments('csi500'), ['Ref($close, -1)/$close-1'])`.

|            |            | label     |
|------------|------------|-----------|
| instrument | datetime   |           |
| SH600004   | 2017-12-11 | -0.013502 |
|            | 2017-12-12 | -0.072367 |
|            | 2017-12-13 | -0.068605 |
|            | 2017-12-14 | 0.012440  |
|            | 2017-12-15 | -0.102778 |

## Parameters

- **start\_date** – start date
- **end\_date** – end\_date
- **show\_notebook** – **True** or **False**. If True, show graph in notebook, else return figures.

**Returns**

```
qlib.contrib.report.analysis_model.analysis_model_performance.ic_figure(ic_df:
```

```
 pan-
 das.core.frame.DataFrame,
 show_nature_day=True,
 **kwargs)
 →
 plotly.graph_objs._figure.F
```

IC figure

**Parameters**

- **ic\_df** – ic DataFrame
- **show\_nature\_day** – whether to display the abscissa of non-trading day

**Returns** plotly.graph\_objs.Figure

```
qlib.contrib.report.analysis_model.analysis_model_performance.model_performance_graph(pred_l:
 pan-
 das.co
 lag:
 int
 =
 I,
 N:
 int
 =
 5,
 re-
 verse=
 rank=
 graph_
 list
 =
 [‘group’,
 ‘pred_’,
 ‘pred_’,
 ‘show_’,
 ‘bool’]
 =
 True,
 show_
 →
 [<class
 ‘list’>,
 <class
 ‘tu-
 ple’>]
```

Model performance

**Parameters** `pred_label` – index is `pd.MultiIndex`, index name is [`instrument`, `datetime`]; columns names is `**[score, label]**`. It is usually same as the label of model training(e.g. “Ref(\$close, -2)/Ref(\$close, -1) - 1”).

| instrument | datetime   | score     | label     |
|------------|------------|-----------|-----------|
| SH600004   | 2017-12-11 | -0.013502 | -0.013502 |
|            | 2017-12-12 | -0.072367 | -0.072367 |
|            | 2017-12-13 | -0.068605 | -0.068605 |
|            | 2017-12-14 | 0.012440  | 0.012440  |
|            | 2017-12-15 | -0.102778 | -0.102778 |

### Parameters

- `lag` – `pred.groupby(level='instrument')[‘score’].shift(lag)`. It will be only used in the auto-correlation computing.
- `N` – group number, default 5.
- `reverse` – if `True`, `pred[‘score’] *= -1`.
- `rank` – if `True`, calculate rank ic.
- `graph_names` – graph names; default `['cumulative_return', ‘pred_ic’, ‘pred_autocorr’, ‘pred_turnover’]`.
- `show_notebook` – whether to display graphics in notebook, the default is `True`.
- `show_nature_day` – whether to display the abscissa of non-trading day.

**Returns** if `show_notebook` is `True`, display in notebook; else return `plotly.graph_objs.Figure` list.

## 1.19.3 Workflow

### Experiment Manager

`class qlib.workflow.expm.ExpManager(uri: str, default_exp_name: Optional[str])`

This is the `ExpManager` class for managing experiments. The API is designed similar to mlflow. (The link: [https://mlflow.org/docs/latest/python\\_api/mlflow.html](https://mlflow.org/docs/latest/python_api/mlflow.html))

`__init__(uri: str, default_exp_name: Optional[str])`

Initialize self. See help(type(self)) for accurate signature.

`start_exp(*, experiment_id: Optional[str] = None, experiment_name: Optional[str] = None, recorder_id: Optional[str] = None, recorder_name: Optional[str] = None, uri: Optional[str] = None, resume: bool = False, **kwargs)`

Start an experiment. This method includes first `get_or_create` an experiment, and then set it to be active.

### Parameters

- `experiment_id(str)` – id of the active experiment.
- `experiment_name(str)` – name of the active experiment.
- `recorder_id(str)` – id of the recorder to be started.
- `recorder_name(str)` – name of the recorder to be started.
- `uri(str)` – the current tracking URI.
- `resume(boolean)` – whether to resume the experiment and recorder.

### Returns

**Return type** An active experiment.

**end\_exp** (*recorder\_status*: str = 'SCHEDULED', \*\**kwargs*)  
End an active experiment.

#### Parameters

- **experiment\_name** (str) – name of the active experiment.
- **recorder\_status** (str) – the status of the active recorder of the experiment.

**create\_exp** (*experiment\_name*: Optional[str] = None)  
Create an experiment.

**Parameters** **experiment\_name** (str) – the experiment name, which must be unique.

#### Returns

**Return type** An experiment object.

**search\_records** (*experiment\_ids*=None, \*\**kwargs*)

Get a pandas DataFrame of records that fit the search criteria of the experiment. Inputs are the search critera user want to apply.

#### Returns

- A pandas.DataFrame of records, where each metric, parameter, and tag are expanded into their own columns named metrics., params.\*, and tags.\*\* respectively. For records that don't have a particular metric, parameter, or tag, their value will be (NumPy) Nan, None, or None respectively.

**get\_exp** (\*, *experiment\_id*=None, *experiment\_name*=None, *create*: bool = True, *start*: bool = False)

Retrieve an experiment. This method includes getting an active experiment, and get\_or\_create a specific experiment.

When user specify experiment id and name, the method will try to return the specific experiment. When user does not provide recorder id or name, the method will try to return the current active experiment. The *create* argument determines whether the method will automatically create a new experiment according to user's specification if the experiment hasn't been created before.

- If *create* is True:
  - If *active experiment* exists:
    - \* no id or name specified, return the active experiment.
    - \* if id or name is specified, return the specified experiment. If no such exp found, create a new experiment with given id or name. If *start* is set to be True, the experiment is set to be active.
  - If *active experiment* not exists:
    - \* no id or name specified, create a default experiment.
    - \* if id or name is specified, return the specified experiment. If no such exp found, create a new experiment with given id or name. If *start* is set to be True, the experiment is set to be active.
- Else If *create* is False:
  - If *active experiment* exists:
    - \* no id or name specified, return the active experiment.

- \* if id or name is specified, return the specified experiment. If no such exp found, raise Error.
- If *active experiment* not exists:
  - \* no id or name specified. If the default experiment exists, return it, otherwise, raise Error.
  - \* if id or name is specified, return the specified experiment. If no such exp found, raise Error.

#### Parameters

- **experiment\_id** (*str*) – id of the experiment to return.
- **experiment\_name** (*str*) – name of the experiment to return.
- **create** (*boolean*) – create the experiment it if hasn't been created before.
- **start** (*boolean*) – start the new experiment if one is created.

#### Returns

**Return type** An experiment object.

**delete\_exp** (*experiment\_id=None, experiment\_name=None*)  
Delete an experiment.

#### Parameters

- **experiment\_id** (*str*) – the experiment id.
- **experiment\_name** (*str*) – the experiment name.

**default\_uri**  
Get the default tracking URI from qlib.config.C

**uri**  
Get the default tracking URI or current URI.

#### Returns

**Return type** The tracking URI string.

**set\_uri** (*uri: Optional[str] = None*)  
Set the current tracking URI and the corresponding variables.

**Parameters** **uri** (*str*) –

**list\_experiments** ()  
List all the existing experiments.

#### Returns

**Return type** A dictionary (name -> experiment) of experiments information that being stored.

## Experiment

**class** `qlib.workflow.exp.Experiment` (*id, name*)

This is the *Experiment* class for each experiment being run. The API is designed similar to mlflow. (The link: [https://mlflow.org/docs/latest/python\\_api/mlflow.html](https://mlflow.org/docs/latest/python_api/mlflow.html))

**\_\_init\_\_** (*id, name*)  
Initialize self. See help(type(self)) for accurate signature.

**start** (\*, recorder\_id=None, recorder\_name=None, resume=False)

Start the experiment and set it to be active. This method will also start a new recorder.

**Parameters**

- **recorder\_id** (str) – the id of the recorder to be created.
- **recorder\_name** (str) – the name of the recorder to be created.
- **resume** (bool) – whether to resume the first recorder

**Returns**

**Return type** An active recorder.

**end**(recorder\_status='SCHEDULED')

End the experiment.

**Parameters** **recorder\_status** (str) – the status the recorder to be set with when ending (SCHEDULED, RUNNING, FINISHED, FAILED).

**create\_recorder**(recorder\_name=None)

Create a recorder for each experiment.

**Parameters** **recorder\_name** (str) – the name of the recorder to be created.

**Returns**

**Return type** A recorder object.

**search\_records**(\*\*kwargs)

Get a pandas DataFrame of records that fit the search criteria of the experiment. Inputs are the search criteria user want to apply.

**Returns**

- *A pandas.DataFrame of records, where each metric, parameter, and tag are expanded into their own columns named metrics., params.\*, and tags.\*\* respectively. For records that don't have a particular metric, parameter, or tag, their value will be (NumPy) Nan, None, or None respectively.*

**delete\_recorder**(recorder\_id)

Create a recorder for each experiment.

**Parameters** **recorder\_id** (str) – the id of the recorder to be deleted.

**get\_recorder**(recorder\_id=None, recorder\_name=None, create: bool = True, start: bool = False)

Retrieve a Recorder for user. When user specify recorder id and name, the method will try to return the specific recorder. When user does not provide recorder id or name, the method will try to return the current active recorder. The *create* argument determines whether the method will automatically create a new recorder according to user's specification if the recorder hasn't been created before.

- If *create* is True:

- If *active recorder* exists:

- \* no id or name specified, return the active recorder.

- \* if id or name is specified, return the specified recorder. If no such exp found, create a new recorder with given id or name. If *start* is set to be True, the recorder is set to be active.

- If *active recorder* not exists:

- \* no id or name specified, create a new recorder.
  - \* if id or name is specified, return the specified experiment. If no such exp found, create a new recorder with given id or name. If *start* is set to be True, the recorder is set to be active.
- Else If *create* is False:
    - If *active recorder* exists:
      - \* no id or name specified, return the active recorder.
      - \* if id or name is specified, return the specified recorder. If no such exp found, raise Error.
    - If *active recorder* not exists:
      - \* no id or name specified, raise Error.
      - \* if id or name is specified, return the specified recorder. If no such exp found, raise Error.

#### Parameters

- **recorder\_id** (*str*) – the id of the recorder to be deleted.
- **recorder\_name** (*str*) – the name of the recorder to be deleted.
- **create** (*boolean*) – create the recorder if it hasn't been created before.
- **start** (*boolean*) – start the new recorder if one is created.

#### Returns

**Return type** A recorder object.

### **list\_recorders** (\*\**flt\_kwarg*s)

List all the existing recorders of this experiment. Please first get the experiment instance before calling this method. If user want to use the method *R.list\_recorders()*, please refer to the related API document in *QlibRecorder*.

**flt\_kwarg** [dict] filter recorders by conditions e.g. `list_recorders(status=Recorder.STATUS_FI)`

#### Returns

**Return type** A dictionary (id -> recorder) of recorder information that being stored.

## Recorder

### **class qlib.workflow.recorder.Recorder** (*experiment\_id*, *name*)

This is the *Recorder* class for logging the experiments. The API is designed similar to mlflow. (The link: [https://mlflow.org/docs/latest/python\\_api/mlflow.html](https://mlflow.org/docs/latest/python_api/mlflow.html))

The status of the recorder can be SCHEDULED, RUNNING, FINISHED, FAILED.

#### **\_\_init\_\_** (*experiment\_id*, *name*)

Initialize self. See help(type(self)) for accurate signature.

#### **save\_objects** (*local\_path=None*, *artifact\_path=None*, \*\**kwargs*)

Save objects such as prediction file or model checkpoints to the artifact URI. User can save object through keywords arguments (name:value).

#### Parameters

- **local\_path** (*str*) – if provided, them save the file or directory to the artifact URI.

- **artifact\_path=None** (*str*) – the relative path for the artifact to be stored in the URI.

**load\_object** (*name*)

Load objects such as prediction file or model checkpoints.

**Parameters** **name** (*str*) – name of the file to be loaded.

**Returns**

**Return type** The saved object.

**start\_run** ()

Start running or resuming the Recorder. The return value can be used as a context manager within a *with* block; otherwise, you must call `end_run()` to terminate the current run. (See `ActiveRun` class in mlflow)

**Returns**

**Return type** An active running object (e.g. `mlflow.ActiveRun` object)

**end\_run** ()

End an active Recorder.

**log\_params** (\*\**kwargs*)

Log a batch of params for the current run.

**Parameters** **arguments** (*keyword*) – key, value pair to be logged as parameters.

**log\_metrics** (*step=None*, \*\**kwargs*)

Log multiple metrics for the current run.

**Parameters** **arguments** (*keyword*) – key, value pair to be logged as metrics.

**set\_tags** (\*\**kwargs*)

Log a batch of tags for the current run.

**Parameters** **arguments** (*keyword*) – key, value pair to be logged as tags.

**delete\_tags** (\**keys*)

Delete some tags from a run.

**Parameters** **keys** (*series of strs of the keys*) – all the name of the tag to be deleted.

**list\_artifacts** (*artifact\_path: str = None*)

List all the artifacts of a recorder.

**Parameters** **artifact\_path** (*str*) – the relative path for the artifact to be stored in the URI.

**Returns**

**Return type** A list of artifacts information (name, path, etc.) that being stored.

**list\_metrics** ()

List all the metrics of a recorder.

**Returns**

**Return type** A dictionary of metrics that being stored.

**list\_params** ()

List all the params of a recorder.

**Returns**

**Return type** A dictionary of params that being stored.

**list\_tags()**

List all the tags of a recorder.

**Returns**

**Return type** A dictionary of tags that being stored.

## Record Template

**class qlib.workflow.record\_temp.RecordTemp(recorder)**

This is the Records Template class that enables user to generate experiment results such as IC and backtest in a certain format.

**\_\_init\_\_(recorder)**

Initialize self. See help(type(self)) for accurate signature.

**generate(\*\*kwargs)**

Generate certain records such as IC, backtest etc., and save them.

**Parameters kwargs –****load(name)**

Load the stored records. Due to the fact that some problems occurred when we tried to balancing a clean API with the Python's inheritance. This method has to be used in a rather ugly way, and we will try to fix them in the future:

```
sar = SigAnaRecord(recorder)
ic = sar.load(sar.get_path("ic.pkl"))
```

**Parameters name (str) –** the name for the file to be load.

**Returns**

**Return type** The stored records.

**list()**

List the stored records.

**Returns**

**Return type** A list of all the stored records.

**check(parent=False)**

Check if the records is properly generated and saved.

FileExistsError: whether the records are stored properly.

**class qlib.workflow.record\_temp.SignalRecord(model=None, dataset=None, recorder=None)**

This is the Signal Record class that generates the signal prediction. This class inherits the RecordTemp class.

**\_\_init\_\_(model=None, dataset=None, recorder=None)**

Initialize self. See help(type(self)) for accurate signature.

**generate(\*\*kwargs)**

Generate certain records such as IC, backtest etc., and save them.

**Parameters kwargs –****list()**

List the stored records.

**Returns**

**Return type** A list of all the stored records.

**load**(*name*=’pred.pkl’)

Load the stored records. Due to the fact that some problems occurred when we tried to balancing a clean API with the Python’s inheritance. This method has to be used in a rather ugly way, and we will try to fix them in the future:

```
sar = SigAnaRecord(recorder)
ic = sar.load(sar.get_path("ic.pkl"))
```

**Parameters** **name** (*str*) – the name for the file to be load.

**Returns**

**Return type** The stored records.

**class** qlib.workflow.record\_temp.**HFSignalRecord**(*recorder*, \*\**kwargs*)

This is the Signal Analysis Record class that generates the analysis results such as IC and IR. This class inherits the RecordTemp class.

**\_\_init\_\_**(*recorder*, \*\**kwargs*)

Initialize self. See help(type(self)) for accurate signature.

**generate**()

Generate certain records such as IC, backtest etc., and save them.

**Parameters** **kwargs** –

**list**()

List the stored records.

**Returns**

**Return type** A list of all the stored records.

**class** qlib.workflow.record\_temp.**SigAnaRecord**(*recorder*, ana\_long\_short=False, ann\_scaler=252, label\_col=0, \*\**kwargs*)

This is the Signal Analysis Record class that generates the analysis results such as IC and IR. This class inherits the RecordTemp class.

**\_\_init\_\_**(*recorder*, ana\_long\_short=False, ann\_scaler=252, label\_col=0, \*\**kwargs*)

Initialize self. See help(type(self)) for accurate signature.

**generate**(\*\**kwargs*)

Generate certain records such as IC, backtest etc., and save them.

**Parameters** **kwargs** –

**list**()

List the stored records.

**Returns**

**Return type** A list of all the stored records.

**class** qlib.workflow.record\_temp.**PortAnaRecord**(*recorder*, *config*, \*\**kwargs*)

This is the Portfolio Analysis Record class that generates the analysis results such as those of backtest. This class inherits the RecordTemp class.

The following files will be stored in recorder - report\_normal.pkl & positions\_normal.pkl:

- The return report and detailed positions of the backtest, returned by *qlib/contrib/evaluate.py:backtest*

- `port_analysis.pkl` : The risk analysis of your portfolio, returned by `qlib/contrib/evaluate.py:risk_analysis`

`__init__(recorder, config, **kwargs)`

`config["strategy"]` [dict] define the strategy class as well as the kwargs.

`config["backtest"]` [dict] define the backtest kwargs.

`generate(**kwargs)`

Generate certain records such as IC, backtest etc., and save them.

#### Parameters `kwargs` –

`list()`

List the stored records.

#### Returns

**Return type** A list of all the stored records.

## 1.19.4 Task Management

### TaskGen

TaskGenerator module can generate many tasks based on TaskGen and some task templates.

`qlib.workflow.task.gen.task_generator(tasks, generators) → list`

Use a list of TaskGen and a list of task templates to generate different tasks.

For examples:

There are 3 task templates a,b,c and 2 TaskGen A,B. A will generates 2 tasks from a template and B will generates 3 tasks from a template. `task_generator([a, b, c], [A, B])` will finally generate  $3 \times 2 = 6$  tasks.

#### Parameters

- `tasks` (`List[dict]` or `dict`) – a list of task templates or a single task
- `generators` (`List[TaskGen]` or `TaskGen`) – a list of TaskGen or a single TaskGen

**Returns** a list of tasks

**Return type** list

`class qlib.workflow.task.gen.TaskGen`

The base class for generating different tasks

Example 1:

input: a specific task template and rolling steps

output: rolling version of the tasks

Example 2:

input: a specific task template and losses list

output: a set of tasks with different losses

`generate(task: dict) → List[dict]`

Generate different tasks based on a task template

**Parameters** `task` (`dict`) – a task template

**Returns** A list of tasks

**Return type** `typing.List[dict]`

`qlib.workflow.task.gen.handler_mod(task: dict, rolling_gen)`

Help to modify the handler end time when using RollingGen

#### Parameters

- **task** (`dict`) – a task template
- **rg** (`RollingGen`) – an instance of RollingGen

`class qlib.workflow.task.gen.RollingGen(step: int = 40, rtype: str = 'expanding', ds_extra_mod_func: Union[None, Callable] = <function handler_mod>)`

`__init__(step: int = 40, rtype: str = 'expanding', ds_extra_mod_func: Union[None, Callable] = <function handler_mod>)`

Generate tasks for rolling

#### Parameters

- **step** (`int`) – step to rolling
- **rtype** (`str`) – rolling type (expanding, sliding)
- **ds\_extra\_mod\_func** (`Callable`) – A method like: `handler_mod(task: dict, rg: RollingGen)` Do some extra action after generating a task. For example, use `handler_mod` to modify the end time of the handler of a dataset.

`gen_following_tasks(task: dict, test_end: pandas._libs.tslibs.timestamps.Timestamp) → List[dict]`

generating following rolling tasks for `task` until `test_end`

#### Parameters

- **task** (`dict`) – Qlib task format
- **test\_end** (`pd.Timestamp`) – the latest rolling task includes `test_end`

**Returns** the following tasks of `task` ('`task` itself is excluded)

**Return type** `List[dict]`

`generate(task: dict) → List[dict]`

Converting the task into a rolling task.

**Parameters** `task` (`dict`) – A dict describing a task. For example.

```
DEFAULT_TASK = {
 "model": {
 "class": "LGBModel",
 "module_path": "qlib.contrib.model.gbdt",
 },
 "dataset": {
 "class": "DatasetH",
 "module_path": "qlib.data.dataset",
 "kwargs": {
 "handler": {
 "class": "Alpha158",
 "module_path": "qlib.contrib.data.handler",
 "kwargs": {
 "start_time": "2008-01-01",
 "end_time": "2020-08-01",
 "fit_start_time": "2008-01-01",
 "fit_end_time": "2014-12-31",
 "instruments": "csi100",
 }
 }
 }
 }
}
```

(continues on next page)

(continued from previous page)

```

 },
 },
 "segments": {
 "train": ("2008-01-01", "2014-12-31"),
 "valid": ("2015-01-01", "2016-12-20"), #_
 ↪Please avoid leaking the future test data into validation
 "test": ("2017-01-01", "2020-08-01"),
 },
 },
 },
 "record": [
 {
 "class": "SignalRecord",
 "module_path": "qlib.workflow.record_temp",
 },
],
 }
}

```

**Returns** List[dict]**Return type** a list of tasks

## TaskManager

TaskManager can fetch unused tasks automatically and manage the lifecycle of a set of tasks with error handling. These features can run tasks concurrently and ensure every task will be used only once. Task Manager will store all tasks in MongoDB. Users **MUST** finished the configuration of MongoDB when using this module.

A task in TaskManager consists of 3 parts - tasks description: the desc will define the task - tasks status: the status of the task - tasks result: A user can get the task with the task description and task result.

```
class qlib.workflow.task.manage.TaskManager(task_pool: str)
```

Here is what will a task looks like when it created by TaskManager

```
{
 'def': pickle serialized task definition. using pickle will make it easier
 'filter': json-like data. This is for filtering the tasks.
 'status': 'waiting' | 'running' | 'done'
 'res': pickle serialized task result,
}
```

The tasks manager assumes that you will only update the tasks you fetched. The mongo fetch one and update will make it date updating secure.

This class can be used as a tool from commandline. Here are serveral examples

```
python -m qlib.workflow.task.manage -t <pool_name> wait
python -m qlib.workflow.task.manage -t <pool_name> task_stat
```

---

**Note:** Assumption: the data in MongoDB was encoded and the data out of MongoDB was decoded

---

Here are four status which are:

STATUS\_WAITING: waiting for training

STATUS\_RUNNING: training

STATUS\_PART\_DONE: finished some step and waiting for next step

STATUS\_DONE: all work done

### `__init__(task_pool: str)`

Init Task Manager, remember to make the statement of MongoDB url and database name firstly. A TaskManager instance serves a specific task pool. The static method of this module serves the whole MongoDB.

**Parameters** `task_pool (str)` – the name of Collection in MongoDB

### `static list() → list`

List the all collection(task\_pool) of the db.

**Returns** list

### `replace_task(task, new_task)`

Use a new task to replace a old one

**Parameters**

- `task` – old task
- `new_task` – new task

### `insert_task(task)`

Insert a task.

**Parameters** `task` – the task waiting for insert

**Returns** pymongo.results.InsertOneResult

### `insert_task_def(task_def)`

Insert a task to task\_pool

**Parameters** `task_def (dict)` – the task definition

**Returns**

**Return type** pymongo.results.InsertOneResult

### `create_task(task_def_l, dry_run=False, print_nt=False) → List[str]`

If the tasks in task\_def\_l are new, then insert new tasks into the task\_pool, and record inserted\_id. If a task is not new, then just query its \_id.

**Parameters**

- `task_def_l (list)` – a list of task
- `dry_run (bool)` – if insert those new tasks to task pool
- `print_nt (bool)` – if print new task

**Returns** a list of the \_id of task\_def\_l

**Return type** List[str]

### `fetch_task(query={}, status='waiting') → dict`

Use query to fetch tasks.

**Parameters**

- `query (dict, optional)` – query dict. Defaults to {}.
- `status (str, optional)` – [description]. Defaults to STATUS\_WAITING.

**Returns** a task(document in collection) after decoding

**Return type** dict

**safe\_fetch\_task** (*query={}*, *status='waiting'*)  
Fetch task from task\_pool using query with contextmanager

**Parameters** `query (dict)` – the dict of query

**Returns** dict

**Return type** a task(document in collection) after decoding

**query** (*query={}*, *decode=True*)  
Query task in collection. This function may raise exception `pymongo.errors.CursorNotFound: cursor id not found` if it takes too long to iterate the generator

**Parameters**

- `query (dict)` – the dict of query
- `decode (bool)` –

**Returns** dict

**Return type** a task(document in collection) after decoding

**re\_query** (*\_id*) → dict  
Use `_id` to query task.

**Parameters** `_id (str)` – `_id` of a document

**Returns** a task(document in collection) after decoding

**Return type** dict

**commit\_task\_res** (*task, res, status='done'*)  
Commit the result to task[‘res’].

**Parameters**

- `task ([type])` – [description]
- `res (object)` – the result you want to save
- `status (str, optional)` – STATUS\_WAITING, STATUS\_RUNNING, STATUS\_DONE, STATUS\_PART\_DONE. Defaults to STATUS\_DONE.

**return\_task** (*task, status='waiting'*)  
Return a task to status. Alway using in error handling.

**Parameters**

- `task ([type])` – [description]
- `status (str, optional)` – STATUS\_WAITING, STATUS\_RUNNING, STATUS\_DONE, STATUS\_PART\_DONE. Defaults to STATUS\_WAITING.

**remove** (*query={}*)  
Remove the task using query

**Parameters** `query (dict)` – the dict of query

**task\_stat** (*query={}*) → dict  
Count the tasks in every status.

**Parameters** `query (dict, optional)` – the query dict. Defaults to {}.

**Returns** dict

**reset\_waiting** (*query={}*)  
Reset all running task into waiting status. Can be used when some running task exit unexpected.

**Parameters** `query (dict, optional)` – the query dict. Defaults to {}.

**prioritize (task, priority: int)**

Set priority for task

#### Parameters

- `task (dict)` – The task query from the database
- `priority (int)` – the target priority

**wait (query={})**

When multiprocessing, the main progress may fetch nothing from TaskManager because there are still some running tasks. So main progress should wait until all tasks are trained well by other progress or machines.

**Parameters** `query (dict, optional)` – the query dict. Defaults to {}.

```
qlib.workflow.task.manage.run_task(task_func: Callable, task_pool: str, query: dict = {},
force_release: bool = False, before_status: str = 'waiting',
after_status: str = 'done', **kwargs)
```

While the task pool is not empty (has WAITING tasks), use task\_func to fetch and run tasks in task\_pool

After running this method, here are 4 situations (before\_status -> after\_status):

STATUS\_WAITING -> STATUS\_DONE: use task[“def”] as task\_func param, it means that the task has not been started

STATUS\_WAITING -> STATUS\_PART\_DONE: use task[“def”] as task\_func param

STATUS\_PART\_DONE -> STATUS\_PART\_DONE: use task[“res”] as task\_func param, it means that the task has been started but not completed

STATUS\_PART\_DONE -> STATUS\_DONE: use task[“res”] as task\_func param

#### Parameters

- `task_func (Callable)` –  
`def (task_def, **kwargs) -> <res which will be committed>` the function to run the task
- `task_pool (str)` – the name of the task pool (Collection in MongoDB)
- `query (dict)` – will use this dict to query task\_pool when fetching task
- `force_release (bool)` – will the program force to release the resource
- `before_status (str:)` – the tasks in before\_status will be fetched and trained. Can be STATUS\_WAITING, STATUS\_PART\_DONE.
- `after_status (str:)` – the tasks after trained will become after\_status. Can be STATUS\_WAITING, STATUS\_PART\_DONE.
- `kwargs` – the params for task\_func

## Trainer

The Trainer will train a list of tasks and return a list of model recorders. There are two steps in each Trainer including “train“(make model recorder) and “end\_train“(modify model recorder).

This is a concept called DelayTrainer, which can be used in online simulating for parallel training. In DelayTrainer, the first step is only to save some necessary info to model recorders, and the second step which will be finished in the end can do some concurrent and time-consuming operations such as model fitting.

Qlib offer two kinds of Trainer, TrainerR is the simplest way and TrainerRM is based on TaskManager to help manager tasks lifecycle automatically.

```
qlib.model.trainer.begin_task_train(task_config: dict, experiment_name: str, recorder_name: str = None) → qlib.workflow.recorder.Recorder
```

Begin task training to start a recorder and save the task config.

**Parameters**

- **task\_config** (*dict*) – the config of a task
- **experiment\_name** (*str*) – the name of experiment
- **recorder\_name** (*str*) – the given name will be the recorder name. None for using rid.

**Returns** the model recorder

**Return type** *Recorder*

```
qlib.model.trainer.end_task_train(rec: qlib.workflow.recorder.Recorder, experiment_name: str) → qlib.workflow.recorder.Recorder
```

Finish task training with real model fitting and saving.

**Parameters**

- **rec** (*Recorder*) – the recorder will be resumed
- **experiment\_name** (*str*) – the name of experiment

**Returns** the model recorder

**Return type** *Recorder*

```
qlib.model.trainer.task_train(task_config: dict, experiment_name: str) → qlib.workflow.recorder.Recorder
```

Task based training, will be divided into two steps.

**Parameters**

- **task\_config** (*dict*) – The config of a task.
- **experiment\_name** (*str*) – The name of experiment

**Returns** *Recorder*

**Return type** The instance of the recorder

```
class qlib.model.trainer.Trainer
```

The trainer can train a list of models. There are Trainer and DelayTrainer, which can be distinguished by when it will finish real training.

```
__init__()
```

Initialize self. See help(type(self)) for accurate signature.

```
train(tasks: list, *args, **kwargs) → list
```

Given a list of task definitions, begin training, and return the models.

For Trainer, it finishes real training in this method. For DelayTrainer, it only does some preparation in this method.

**Parameters** **tasks** – a list of tasks

**Returns** a list of models

**Return type** list

**end\_train** (*models*: list, \**args*, \*\**kwargs*) → list

Given a list of models, finished something at the end of training if you need. The models may be Recorder, txt file, database, and so on.

For Trainer, it does some finishing touches in this method. For DelayTrainer, it finishes real training in this method.

**Parameters** **models** – a list of models

**Returns** a list of models

**Return type** list

**is\_delay** () → bool

If Trainer will delay finishing *end\_train*.

**Returns** if DelayTrainer

**Return type** bool

**class** qlib.model.trainer.TrainerR (*experiment\_name*: str = None, *train\_func*: Callable = <function task\_train>)

Trainer based on (R)ecorder. It will train a list of tasks and return a list of model recorders in a linear way.

Assumption: models were defined by *task* and the results will be saved to *Recorder*.

**\_\_init\_\_** (*experiment\_name*: str = None, *train\_func*: Callable = <function task\_train>)

Init TrainerR.

**Parameters**

- **experiment\_name** (str, optional) – the default name of experiment.
- **train\_func** (Callable, optional) – default training method. Defaults to *task\_train*.

**train** (*tasks*: list, *train\_func*: Callable = None, *experiment\_name*: str = None, \*\**kwargs*) → List[qlib.workflow.recorder.Recorder]

Given a list of ‘task’s and return a list of trained Recorder. The order can be guaranteed.

**Parameters**

- **tasks** (list) – a list of definitions based on *task* dict
- **train\_func** (Callable) – the training method which needs at least *tasks* and *experiment\_name*. None for the default training method.
- **experiment\_name** (str) – the experiment name, None for use default name.
- **kwargs** – the params for *train\_func*.

**Returns** a list of Recorders

**Return type** List[*Recorder*]

**end\_train** (*recs*: list, \*\**kwargs*) → List[qlib.workflow.recorder.Recorder]

Set STATUS\_END tag to the recorders.

**Parameters** **recs** (list) – a list of trained recorders.

**Returns** the same list as the param.

**Return type** List[*Recorder*]

```
class qlib.model.trainer.DelayTrainerR(experiment_name: str = None,
 train_func=<function begin_task_train>,
 end_train_func=<function end_task_train>)
```

A delayed implementation based on TrainerR, which means *train* method may only do some preparation and *end\_train* method can do the real model fitting.

```
__init__(experiment_name: str = None, train_func=<function begin_task_train>,
 end_train_func=<function end_task_train>)
 Init TrainerRM.
```

#### Parameters

- **experiment\_name** (*str*) – the default name of experiment.
- **train\_func** (*Callable, optional*) – default train method. Defaults to *begin\_task\_train*.
- **end\_train\_func** (*Callable, optional*) – default end\_train method. Defaults to *end\_task\_train*.

```
end_train(recs, end_train_func=None, experiment_name: str = None, **kwargs) →
 List[qlib.workflow.recorder.Recorder]
```

Given a list of Recorder and return a list of trained Recorder. This class will finish real data loading and model fitting.

#### Parameters

- **recs** (*list*) – a list of Recorder, the tasks have been saved to them
- **end\_train\_func** (*Callable, optional*) – the end\_train method which needs at least *recorder's* and '*experiment\_name*'. Defaults to None for using self.end\_train\_func.
- **experiment\_name** (*str*) – the experiment name, None for use default name.
- **kwargs** – the params for end\_train\_func.

**Returns** a list of Recorders

**Return type** List[*Recorder*]

```
class qlib.model.trainer.TrainerRM(experiment_name: str = None, task_pool: str = None,
 train_func=<function task_train>, skip_run_task: bool =
 False)
```

Trainer based on (R)eorder and Task(M)anager. It can train a list of tasks and return a list of model recorders in a multiprocessing way.

Assumption: *task* will be saved to TaskManager and *task* will be fetched and trained from TaskManager

```
__init__(experiment_name: str = None, task_pool: str = None, train_func=<function task_train>,
 skip_run_task: bool = False)
 Init TrainerR.
```

#### Parameters

- **experiment\_name** (*str*) – the default name of experiment.
- **task\_pool** (*str*) – task pool name in TaskManager. None for use same name as experiment\_name.
- **train\_func** (*Callable, optional*) – default training method. Defaults to *task\_train*.
- **skip\_run\_task** (*bool*) – If skip\_run\_task == True: Only run\_task in the worker. Otherwise skip run\_task.

---

**train** (*tasks: list, train\_func: Callable = None, experiment\_name: str = None, before\_status: str = 'waiting', after\_status: str = 'done', \*\*kwargs*) → List[qlib.workflow.recorder.Recorder]  
Given a list of ‘task’s and return a list of trained Recorder. The order can be guaranteed.

This method defaults to a single process, but TaskManager offered a great way to parallel training. Users can customize their train\_func to realize multiple processes or even multiple machines.

#### Parameters

- **tasks** (*list*) – a list of definitions based on *task* dict
- **train\_func** (*Callable*) – the training method which needs at least *task’s and ‘experiment\_name*. None for the default training method.
- **experiment\_name** (*str*) – the experiment name, None for use default name.
- **before\_status** (*str*) – the tasks in before\_status will be fetched and trained. Can be STATUS\_WAITING, STATUS\_PART\_DONE.
- **after\_status** (*str*) – the tasks after trained will become after\_status. Can be STATUS\_WAITING, STATUS\_PART\_DONE.
- **kwargs** – the params for train\_func.

**Returns** a list of Recorders

**Return type** List[*Recorder*]

**end\_train** (*recs: list, \*\*kwargs*) → List[qlib.workflow.recorder.Recorder]  
Set STATUS\_END tag to the recorders.

**Parameters** **recs** (*list*) – a list of trained recorders.

**Returns** the same list as the param.

**Return type** List[*Recorder*]

**worker** (*train\_func: Callable = None, experiment\_name: str = None*)

The multiprocessing method for *train*. It can share a same task\_pool with *train* and can run in other progress or other machines.

#### Parameters

- **train\_func** (*Callable*) – the training method which needs at least *task’s and ‘experiment\_name*. None for the default training method.
- **experiment\_name** (*str*) – the experiment name, None for use default name.

**class** qlib.model.trainer.**DelayTrainerRM**(*experiment\_name: str = None, task\_pool: str = None, train\_func=<function begin\_task\_train>, end\_train\_func=<function end\_task\_train>, skip\_run\_task: bool = False*)

A delayed implementation based on TrainerRM, which means *train* method may only do some preparation and *end\_train* method can do the real model fitting.

**\_\_init\_\_** (*experiment\_name: str = None, task\_pool: str = None, train\_func=<function begin\_task\_train>, end\_train\_func=<function end\_task\_train>, skip\_run\_task: bool = False*)  
Init DelayTrainerRM.

#### Parameters

- **experiment\_name** (*str*) – the default name of experiment.
- **task\_pool** (*str*) – task pool name in TaskManager. None for use same name as experiment\_name.

- **train\_func** (*Callable, optional*) – default train method. Defaults to *begin\_task\_train*.
- **end\_train\_func** (*Callable, optional*) – default end\_train method. Defaults to *end\_task\_train*.
- **skip\_run\_task** (*bool*) – If *skip\_run\_task == True*: Only *run\_task* in the worker. Otherwise skip *run\_task*. E.g. Starting trainer on a CPU VM and then waiting tasks to be finished on GPU VMs.

**train** (*tasks: list, train\_func=None, experiment\_name: str = None, \*\*kwargs*) →  
List[qlib.workflow.recorder.Recorder]  
Same as *train* of TrainerRM, after\_status will be STATUS\_PART\_DONE.

#### Parameters

- **tasks** (*list*) – a list of definition based on *task* dict
- **train\_func** (*Callable*) – the train method which need at least *task's and 'experiment\_name*. Defaults to None for using self.train\_func.
- **experiment\_name** (*str*) – the experiment name, None for use default name.

**Returns** a list of Recorders

**Return type** List[*Recorder*]

**end\_train** (*recs, end\_train\_func=None, experiment\_name: str = None, \*\*kwargs*) →  
List[qlib.workflow.recorder.Recorder]

Given a list of Recorder and return a list of trained Recorder. This class will finish real data loading and model fitting.

#### Parameters

- **recs** (*list*) – a list of Recorder, the tasks have been saved to them.
- **end\_train\_func** (*Callable, optional*) – the end\_train method which need at least *recorder's and 'experiment\_name*. Defaults to None for using self.end\_train\_func.
- **experiment\_name** (*str*) – the experiment name, None for use default name.
- **kwargs** – the params for end\_train\_func.

**Returns** a list of Recorders

**Return type** List[*Recorder*]

**worker** (*end\_train\_func=None, experiment\_name: str = None*)

The multiprocessing method for *end\_train*. It can share a same task\_pool with *end\_train* and can run in other progress or other machines.

#### Parameters

- **end\_train\_func** (*Callable, optional*) – the end\_train method which need at least *recorder's and 'experiment\_name*. Defaults to None for using self.end\_train\_func.
- **experiment\_name** (*str*) – the experiment name, None for use default name.

## Collector

Collector module can collect objects from everywhere and process them such as merging, grouping, averaging and so on.

---

```
class qlib.workflow.task.collect.Collector(process_list=[])
The collector to collect different results
```

```
__init__(process_list=[])
Init Collector.
```

**Parameters** `process_list` (*list or Callable*) – the list of processors or the instance of a processor to process dict.

`collect()` → dict

Collect the results and return a dict like {key: things}

#### Returns

the dict after collecting.

For example:

```
{“prediction”: pd.Series}
{“IC”: {“Xgboost”: pd.Series, “LSTM”: pd.Series}}
```

#### Return type

dict

```
static process_collect(collected_dict, process_list=[], *args, **kwargs) → dict
```

Do a series of processing to the dict returned by collect and return a dict like {key: things} For example, you can group and ensemble.

#### Parameters

- `collected_dict` (*dict*) – the dict return by `collect`
- `process_list` (*list or Callable*) – the list of processors or the instance of a processor to process dict.
- `processor order is the same as the list order.` (*The*) – For example: [Group1(..., Ensemble1()), Group2(..., Ensemble2())]

**Returns** the dict after processing.

#### Return type

```
class qlib.workflow.task.collect.MergeCollector(collector_dict: Dict[str, qlib.workflow.task.collect.Collector], process_list: List[Callable] = [], merge_func=None)
```

A collector to collect the results of other Collectors

For example:

We have 2 collector, which named A and B. A can collect {"prediction": pd.Series} and B can collect {"IC": {"Xgboost": pd.Series, "LSTM": pd.Series}}. Then after this class's collect, we can collect {"A\_prediction": pd.Series, "B\_IC": {"Xgboost": pd.Series, "LSTM": pd.Series}}

```
__init__(collector_dict: Dict[str, qlib.workflow.task.collect.Collector], process_list: List[Callable] = [], merge_func=None)
```

Init MergeCollector.

#### Parameters

- `collector_dict` (*Dict [str, Collector]*) – the dict like {collector\_key, Collector}
- `process_list` (*List [Callable]*) – the list of processors or the instance of processor to process dict.

- **merge\_func** (*Callable*) – a method to generate outermost key. The given params are `collector_key` from `collector_dict` and `key` from every collector after collecting. None for using tuple to connect them, such as “ABC”+ (“a”, “b”) -> (“ABC”, (“a”, “b”)).

**collect()** → dict

Collect all results of `collector_dict` and change the outermost key to a recombination key.

**Returns** the dict after collecting.

**Return type** dict

```
class qlib.workflow.task.collect.RecorderCollector(experiment, process_list=[],
 rec_key_func=None,
 rec_filter_func=None,
 artifacts_path={'pred':
 'pred.pkl'}, artifacts_key=None,
 list_kwargs={})
```

```
__init__(experiment, process_list=[], rec_key_func=None, rec-
filter_func=None, arti-
facts_path={'pred': 'pred.pkl'}, artifacts_key=None, list_kwargs={})
```

Init RecorderCollector.

#### Parameters

- **experiment** (*Experiment or str*) – an instance of an Experiment or the name of an Experiment
- **process\_list** (*list or Callable*) – the list of processors or the instance of a processor to process dict.
- **rec\_key\_func** (*Callable*) – a function to get the key of a recorder. If None, use recorder id.
- **rec\_filter\_func** (*Callable, optional*) – filter the recorder by return True or False. Defaults to None.
- **artifacts\_path** (*dict, optional*) – The artifacts name and its path in Recorder. Defaults to {"pred": "pred.pkl", "IC": "sig\_analysis/ic.pkl"}.
- **artifacts\_key** (*str or List, optional*) – the artifacts key you want to get. If None, get all artifacts.
- **list\_kwargs** (*str*) – arguments for list\_recorders function.

**collect(artifacts\_key=None, rec\_filter\_func=None, only\_exist=True)** → dict

Collect different artifacts based on recorder after filtering.

#### Parameters

- **artifacts\_key** (*str or List, optional*) – the artifacts key you want to get. If None, use the default.
- **rec\_filter\_func** (*Callable, optional*) – filter the recorder by return True or False. If None, use the default.
- **only\_exist** (*bool, optional*) – if only collect the artifacts when a recorder really has. If True, the recorder with exception when loading will not be collected. But if False, it will raise the exception.

**Returns** the dict after collected like {artifact: {rec\_key: object}}

**Return type** dict

---

```
get_exp_name() → str
 Get experiment name

 Returns experiment name

 Return type str
```

## Group

Group can group a set of objects based on *group\_func* and change them to a dict. After group, we provide a method to reduce them.

For example:

```
group: {(A,B,C1): object, (A,B,C2): object} -> {(A,B): {C1: object, C2: object}} reduce: {(A,B): {C1: object, C2: object}} -> {(A,B): object}
```

```
class qlib.model.ens.group.Group (group_func=None, ens: qlib.model.ens.ensemble.Ensemble = None)
```

Group the objects based on dict

```
__init__ (group_func=None, ens: qlib.model.ens.ensemble.Ensemble = None)
```

Init Group.

### Parameters

- **group\_func** (*Callable, optional*) – Given a dict and return the group key and one of the group elements.

For example: {(A,B,C1): object, (A,B,C2): object} -> {(A,B): {C1: object, C2: object}}

- **to None.** (*Defaults*) –

- **ens** (*Ensemble, optional*) – If not None, do ensemble for grouped value after grouping.

```
group (*args, **kwargs) → dict
```

Group a set of objects and change them to a dict.

For example: {(A,B,C1): object, (A,B,C2): object} -> {(A,B): {C1: object, C2: object}}

**Returns** grouped dict

**Return type** dict

```
reduce (*args, **kwargs) → dict
```

Reduce grouped dict.

For example: {(A,B): {C1: object, C2: object}} -> {(A,B): object}

**Returns** reduced dict

**Return type** dict

```
class qlib.model.ens.group.RollingGroup
```

Group the rolling dict

```
group (rolling_dict: dict) → dict
```

Given an rolling dict likes {(A,B,R): things}, return the grouped dict likes {(A,B): {R:things}}

NOTE: There is an assumption which is the rolling key is at the end of the key tuple, because the rolling results always need to be ensemble firstly.

**Parameters** `rolling_dict` (`dict`) – an rolling dict. If the key is not a tuple, then do nothing.

**Returns** grouped dict

**Return type** dict

**\_\_init\_\_()**

Init Group.

**Parameters**

- **group\_func** (`Callable, optional`) – Given a dict and return the group key and one of the group elements.

For example: `{(A,B,C1): object, (A,B,C2): object} -> {(A,B): {C1: object, C2: object}}`

- **to None.** (`Defaults`) –

- **ens** (`Ensemble, optional`) – If not None, do ensemble for grouped value after grouping.

## Ensemble

Ensemble module can merge the objects in an Ensemble. For example, if there are many submodels predictions, we may need to merge them into an ensemble prediction.

**class** `qlib.model.ens.ensemble.Ensemble`

Merge the ensemble\_dict into an ensemble object.

For example: `{Rollinga_b: object, Rollingb_c: object} -> object`

When calling this class:

**Args:** ensemble\_dict (dict): the ensemble dict like `{name: things}` waiting for merging

**Returns:** object: the ensemble object

**class** `qlib.model.ens.ensemble.SingleKeyEnsemble`

Extract the object if there is only one key and value in the dict. Make the result more readable. {Only key: Only value} -> Only value

If there is more than 1 key or less than 1 key, then do nothing. Even you can run this recursively to make dict more readable.

NOTE: Default runs recursively.

When calling this class:

**Args:** ensemble\_dict (dict): the dict. The key of the dict will be ignored.

**Returns:** dict: the readable dict.

**class** `qlib.model.ens.ensemble.RollingEnsemble`

Merge a dict of rolling dataframe like `prediction` or `IC` into an ensemble.

NOTE: The values of dict must be pd.DataFrame, and have the index “datetime”.

When calling this class:

**Args:** ensemble\_dict (dict): a dict like `{"A": pd.DataFrame, "B": pd.DataFrame}`. The key of the dict will be ignored.

**Returns:** pd.DataFrame: the complete result of rolling.

**class** qlib.model.ens.ensemble.**AverageEnsemble**

Average and standardize a dict of same shape dataframe like *prediction* or *IC* into an ensemble.

NOTE: The values of dict must be pd.DataFrame, and have the index “datetime”. If it is a nested dict, then flat it.

When calling this class:

**Args:** ensemble\_dict (dict): a dict like {"A": pd.DataFrame, "B": pd.DataFrame}. The key of the dict will be ignored.

**Returns:** pd.DataFrame: the complete result of averaging and standardizing.

**Utils**

Some tools for task management.

**qlib.workflow.task.utils.get\_mongodb()** → pymongo.database.Database

Get database in MongoDB, which means you need to declare the address and the name of a database at first.

For example:

Using qlib.init():

```
mongo_conf = { "task_url": task_url, # your MongoDB url "task_db_name":
 task_db_name, # database name
 } qlib.init(..., mongo=mongo_conf)
```

After qlib.init():

```
C[“mongo”] = { “task_url” : “mongodb://localhost:27017/”, “task_db_name” :
 “rolling_db”
 }
```

**Returns** the Database instance

**Return type** Database

**qlib.workflow.task.utils.list\_recorders(experiment, rec\_filter\_func=None)**

List all recorders which can pass the filter in an experiment.

**Parameters**

- **experiment** (str or Experiment) – the name of an Experiment or an instance
- **rec\_filter\_func** (Callable, optional) – return True to retain the given recorder. Defaults to None.

**Returns** a dict {rid: recorder} after filtering.

**Return type** dict

**class** qlib.workflow.task.utils.**TimeAdjuster**(future=True, end\_time=None)

Find appropriate date and adjust date.

**\_\_init\_\_(future=True, end\_time=None)**

Initialize self. See help(type(self)) for accurate signature.

**set\_end\_time(end\_time=None)**

Set end time. None for use calendar’s end time.

**Parameters** **end\_time** –

**get(idx: int)**

Get datetime by index.

**Parameters** `idx` (`int`) – index of the calendar

`max()` → `pandas._libs.tslibs.timestamps.Timestamp`  
Return the max calendar datetime

`align_idx` (`time_point`, `tp_type='start'`) → `int`  
Align the index of `time_point` in the calendar.

**Parameters**

- `time_point` –
- `tp_type` (`str`) –

**Returns** `index`

**Return type** `int`

`cal_interval` (`time_point_A`, `time_point_B`) → `int`  
Calculate the trading day interval (`time_point_A - time_point_B`)

**Parameters**

- `time_point_A` – `time_point_A`
- `time_point_B` – `time_point_B` (is the past of `time_point_A`)

**Returns** the interval between A and B

**Return type** `int`

`align_time` (`time_point`, `tp_type='start'`) → `pandas._libs.tslibs.timestamps.Timestamp`  
Align `time_point` to trade date of calendar

**Parameters**

- `time_point` – Time point
- `tp_type` – str time point type (“`start`”, “`end`”)

**Returns** `pd.Timestamp`

`align_seg` (`segment: Union[dict, tuple]`) → `Union[dict, tuple]`  
Align the given date to the trade date

for example:

```
input: {'train': ('2008-01-01', '2014-12-31'), 'valid': ('2015-01-01
˓→', '2016-12-31'), 'test': ('2017-01-01', '2020-08-01')}

output: {'train': (Timestamp('2008-01-02 00:00:00'), Timestamp(
˓→'2014-12-31 00:00:00')),
 'valid': (Timestamp('2015-01-05 00:00:00'), Timestamp('2016-
˓→12-30 00:00:00')),
 'test': (Timestamp('2017-01-03 00:00:00'), Timestamp('2020-
˓→07-31 00:00:00'))}
```

**Parameters** `segment` –

**Returns** `Union[dict, tuple]`

**Return type** the start and end trade date (`pd.Timestamp`) between the given start and end date.

**truncate** (*segment: tuple, test\_start, days: int*) → tuple

Truncate the segment based on the test\_start date

#### Parameters

- **segment** (*tuple*) – time segment
- **test\_start** –
- **days** (*int*) – The trading days to be truncated the data in this segment may need ‘days’ data

#### Returns tuple

**Return type** new segment

**shift** (*seg: tuple, step: int, rtype='sliding'*) → tuple

Shift the datatime of segment

#### Parameters

- **seg** – datetime segment
- **step** (*int*) – rolling step
- **rtype** (*str*) – rolling type (“sliding” or “expanding”)

#### Returns tuple

**Return type** new segment

**Raises** KeyError: – shift will raise error if the index(both start and end) is out of self.cal

## 1.19.5 Online Serving

### Online Manager

OnlineManager can manage a set of *Online Strategy* and run them dynamically.

With the change of time, the decisive models will be also changed. In this module, we call those contributing models *online* models. In every routine(such as every day or every minute), the *online* models may be changed and the prediction of them needs to be updated. So this module provides a series of methods to control this process.

This module also provides a method to simulate *Online Strategy* in history. Which means you can verify your strategy or find a better one.

There are 4 total situations for using different trainers in different situations:

| Situations                 | Description                                                                                                                                                                                                                                                                                                     |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Online + Trainer           | When you want to do a REAL routine, the Trainer will help you train the models. It will train models task by task and strategy by strategy.                                                                                                                                                                     |
| Online + Delay-Trainer     | When your models don't have any temporal dependence, the DelayTrainer will train nothing until all tasks have been prepared. It makes user can train all tasks in the end of <i>routine</i> or <i>first_train</i> .                                                                                             |
| Simulation + Trainer       | When your models have some temporal dependence on the previous models, then you need to consider using Trainer. This means it will REAL train your models in every routine and prepare signals for every routine.                                                                                               |
| Simulation + Delay-Trainer | When your models don't have any temporal dependence, you can use DelayTrainer for the ability to multitasking. It means all tasks in all routines can be REAL trained at the end of simulating. The signals will be prepared well at different time segments (based on whether or not any new model is online). |

```
class qlib.workflow.online.manager.OnlineManager(strategies:
 Union[qlib.workflow.online.strategy.OnlineStrategy,
 List[qlib.workflow.online.strategy.OnlineStrategy]],
 trainer: qlib.model.trainer.Trainer =
 None, begin_time: Union[str, pandas._libs.tslibs.timestamps.Timestamp]
 = None, freq='day')
```

OnlineManager can manage online models with *Online Strategy*. It also provides a history recording of which models are online at what time.

```
__init__(strategies: Union[qlib.workflow.online.strategy.OnlineStrategy,
 List[qlib.workflow.online.strategy.OnlineStrategy]], trainer: qlib.model.trainer.Trainer
 = None, begin_time: Union[str, pandas._libs.tslibs.timestamps.Timestamp] = None,
 freq='day')
```

Init OnlineManager. One OnlineManager must have at least one OnlineStrategy.

#### Parameters

- **strategies** (*Union[OnlineStrategy, List[OnlineStrategy]]*) – an instance of OnlineStrategy or a list of OnlineStrategy
- **begin\_time** (*Union[str, pd.Timestamp]*, *optional*) – the OnlineManager will begin at this time. Defaults to None for using the latest date.
- **trainer** (*Trainer*) – the trainer to train task. None for using TrainerR.
- **freq** (*str*, *optional*) – data frequency. Defaults to “day”.

```
first_train(strategies: List[qlib.workflow.online.strategy.OnlineStrategy] = None, model_kwargs:
 dict = {})
```

Get tasks from every strategy's first\_tasks method and train them. If using DelayTrainer, it can finish training all together after every strategy's first\_tasks.

#### Parameters

- **strategies** (*List[OnlineStrategy]*) – the strategies list (need this param when adding strategies). None for use default strategies.
- **model\_kwargs** (*dict*) – the params for *prepare\_online\_models*

```
routine(cur_time: Union[str, pandas._libs.tslibs.timestamps.Timestamp] = None, task_kwargs: dict
= {}, model_kwargs: dict = {}, signal_kwargs: dict = {})
```

Typical update process for every strategy and record the online history.

The typical update process after a routine, such as day by day or month by month. The process is: Update predictions -> Prepare tasks -> Prepare online models -> Prepare signals.

If using DelayTrainer, it can finish training all together after every strategy's prepare\_tasks.

### Parameters

- **cur\_time** (*Union[str, pd.Timestamp]*, *optional*) – run routine method in this time. Defaults to None.
- **task\_kwargs** (*dict*) – the params for *prepare\_tasks*
- **model\_kwargs** (*dict*) – the params for *prepare\_online\_models*
- **signal\_kwargs** (*dict*) – the params for *prepare\_signals*

**get\_collector** (\*\*kwargs) → qlib.workflow.task.collect.MergeCollector

Get the instance of [Collector](#) to collect results from every strategy. This collector can be a basis as the signals preparation.

**Parameters** **\*\*kwargs** – the params for get\_collector.

**Returns** the collector to merge other collectors.

**Return type** [MergeCollector](#)

**add\_strategy** (*strategies*: *Union[qlib.workflow.online.strategy.OnlineStrategy,*  
*List[qlib.workflow.online.strategy.OnlineStrategy]]*)

Add some new strategies to OnlineManager.

**Parameters** **strategy** (*Union[OnlineStrategy, List[OnlineStrategy]]*)  
– a list of OnlineStrategy

**prepare\_signals** (*prepare\_func: Callable = <qlib.model.ens.ensemble.AverageEnsemble object>*,  
*over\_write=False*)

After preparing the data of the last routine (a box in box-plot) which means the end of the routine, we can prepare trading signals for the next routine.

NOTE: Given a set prediction, all signals before these prediction end times will be prepared well.

Even if the latest signal already exists, the latest calculation result will be overwritten.

---

**Note:** Given a prediction of a certain time, all signals before this time will be prepared well.

---

### Parameters

- **prepare\_func** (*Callable*, *optional*) – Get signals from a dict after collecting. Defaults to AverageEnsemble(), the results collected by MergeCollector must be {xxx:pred}.
- **over\_write** (*bool*, *optional*) – If True, the new signals will overwrite. If False, the new signals will append to the end of signals. Defaults to False.

**Returns** the signals.

**Return type** [pd.DataFrame](#)

**get\_signals** () → *Union[pandas.core.series.Series, pandas.core.frame.DataFrame]*

Get prepared online signals.

**Returns** [pd.Series](#) for only one signals every datetime. [pd.DataFrame](#) for multiple signals, for example, buy and sell operations use different trading signals.

**Return type** Union[pd.Series, pd.DataFrame]

**simulate** (end\_time=None, frequency='day', task\_kwargs={}, model\_kwargs={}, signal\_kwargs={})

→ Union[pandas.core.series.Series, pandas.core.frame.DataFrame]

Starting from the current time, this method will simulate every routine in OnlineManager until the end time.

Considering the parallel training, the models and signals can be prepared after all routine simulating.

The delay training way can be DelayTrainer and the delay preparing signals way can be delay\_prepare.

#### Parameters

- **end\_time** – the time the simulation will end
- **frequency** – the calendar frequency
- **task\_kwargs** (dict) – the params for *prepare\_tasks*
- **model\_kwargs** (dict) – the params for *prepare\_online\_models*
- **signal\_kwargs** (dict) – the params for *prepare\_signals*

**Returns** pd.Series for only one signals every datetime. pd.DataFrame for multiple signals, for example, buy and sell operations use different trading signals.

**Return type** Union[pd.Series, pd.DataFrame]

**delay\_prepare** (model\_kwargs={}, signal\_kwargs{})

Prepare all models and signals if something is waiting for preparation.

#### Parameters

- **model\_kwargs** – the params for *end\_train*
- **signal\_kwargs** – the params for *prepare\_signals*

## Online Strategy

OnlineStrategy module is an element of online serving.

**class** qlib.workflow.online.strategy.**OnlineStrategy** (name\_id: str)

OnlineStrategy is working with *Online Manager*, responding to how the tasks are generated, the models are updated and signals are prepared.

**\_\_init\_\_** (name\_id: str)

Init OnlineStrategy. This module **MUST** use Trainer to finishing model training.

#### Parameters

- **name\_id** (str) – a unique name or id.
- **trainer** (Trainer, optional) – a instance of Trainer. Defaults to None.

**prepare\_tasks** (cur\_time, \*\*kwargs) → List[dict]

After the end of a routine, check whether we need to prepare and train some new tasks based on cur\_time (None for latest).. Return the new tasks waiting for training.

You can find the last online models by OnlineTool.online\_models.

**prepare\_online\_models** (trained\_models, cur\_time=None) → List[object]

Select some models from trained models and set them to online models. This is a typical implementation to online all trained models, you can override it to implement the complex method. You can find the last online models by OnlineTool.online\_models if you still need them.

**NOTE:** Reset all online models to trained models. If there are no trained models, then do nothing.

**NOTE:** Current implementation is very naive. Here is a more complex situation which is more closer to the practical scenarios. 1. Train new models at the day before *test\_start* (at time stamp *T*) 2. Switch models at the *test\_start* (at time timestamp *T + 1* typically)

### Parameters

- **models** (*list*) – a list of models.
- **cur\_time** (*pd.DataFrame*) – current time from OnlineManger. None for the latest.

**Returns** a list of online models.

**Return type** List[object]

**first\_tasks()** → List[dict]

Generate a series of tasks firstly and return them.

**get\_collector()** → qlib.workflow.task.collect.Collector

Get the instance of [Collector](#) to collect different results of this strategy.

**For example:**

- 1) collect predictions in Recorder
- 2) collect signals in a txt file

**Returns** Collector

```
class qlib.workflow.online.strategy.RollingStrategy(name_id: str,
 task_template: Union[dict,
 List[dict]],
 rolling_gen:
 qlib.workflow.task.gen.RollingGen)
```

This example strategy always uses the latest rolling model sas online models.

```
__init__(name_id: str, task_template: Union[dict, List[dict]], rolling_gen:
 qlib.workflow.task.gen.RollingGen)
Init RollingStrategy.
```

Assumption: the str of name\_id, the experiment name, and the trainer's experiment name are the same.

### Parameters

- **name\_id** (*str*) – a unique name or id. Will be also the name of the Experiment.
- **task\_template** (*Union[dict, List[dict]]*) – a list of task\_template or a single template, which will be used to generate many tasks using rolling\_gen.
- **rolling\_gen** (*RollingGen*) – an instance of RollingGen

```
get_collector(process_list=[<qlib.model.ens.group.RollingGroup object>], rec_key_func=None,
 rec_filter_func=None, artifacts_key=None)
```

Get the instance of [Collector](#) to collect results. The returned collector must distinguish results in different models.

Assumption: the models can be distinguished based on the model name and rolling test segments. If you do not want this assumption, please implement your method or use another rec\_key\_func.

### Parameters

- **rec\_key\_func** (*Callable*) – a function to get the key of a recorder. If None, use recorder id.

- **rec\_filter\_func** (*Callable, optional*) – filter the recorder by return True or False. Defaults to None.
- **artifacts\_key** (*List[str], optional*) – the artifacts key you want to get. If None, get all artifacts.

**first\_tasks** () → List[dict]

Use rolling\_gen to generate different tasks based on task\_template.

**Returns** a list of tasks

**Return type** List[dict]

**prepare\_tasks** (*cur\_time*) → List[dict]

Prepare new tasks based on cur\_time (None for the latest).

You can find the last online models by OnlineToolR.online\_models.

**Returns** a list of new tasks.

**Return type** List[dict]

## Online Tool

OnlineTool is a module to set and unset a series of *online* models. The *online* models are some decisive models in some time points, which can be changed with the change of time. This allows us to use efficient submodels as the market-style changing.

**class** qlib.workflow.online.utils.**OnlineTool**

OnlineTool will manage *online* models in an experiment that includes the model recorders.

**\_\_init\_\_** ()

Init OnlineTool.

**set\_online\_tag** (*tag, recorder: Union[list, object]*)

Set *tag* to the model to sign whether online.

### Parameters

- **tag** (*str*) – the tags in *ONLINE\_TAG, OFFLINE\_TAG*
- **recorder** (*Union[list, object]*) – the model's recorder

**get\_online\_tag** (*recorder: object*) → str

Given a model recorder and return its online tag.

**Parameters** **recorder** (*Object*) – the model's recorder

**Returns** the online tag

**Return type** str

**reset\_online\_tag** (*recorder: Union[list, object]*)

Offline all models and set the recorders to 'online'.

**Parameters** **recorder** (*Union[list, object]*) – the recorder you want to reset to 'online'.

**online\_models** () → list

Get current *online* models

**Returns** a list of *online* models.

**Return type** list

**update\_online\_pred**(*to\_date=None*)

Update the predictions of *online* models to *to\_date*.

**Parameters** **to\_date**(*pd.Timestamp*) – the pred before this date will be updated. None for updating to the latest.

**class** qlib.workflow.online.utils.**OnlineToolR**(*default\_exp\_name: str = None*)

The implementation of OnlineTool based on (R)ecorder.

**\_\_init\_\_**(*default\_exp\_name: str = None*)

Init OnlineToolR.

**Parameters** **default\_exp\_name**(*str*) – the default experiment name.

**set\_online\_tag**(*tag, recorder: Union[qlib.workflow.recorder.Recorder, List[T]]*)

Set *tag* to the model's recorder to sign whether online.

**Parameters**

- **tag**(*str*) – the tags in *ONLINE\_TAG*, *NEXT\_ONLINE\_TAG*, *OFFLINE\_TAG*
- **recorder**(*Union[Recorder, List]*) – a list of Recorder or an instance of Recorder

**get\_online\_tag**(*recorder: qlib.workflow.recorder.Recorder*) → *str*

Given a model recorder and return its online tag.

**Parameters** **recorder**(*Recorder*) – an instance of recorder

**Returns** the online tag

**Return type** *str*

**reset\_online\_tag**(*recorder: Union[qlib.workflow.recorder.Recorder, List[T]], exp\_name: str = None*)

Offline all models and set the recorders to 'online'.

**Parameters**

- **recorder**(*Union[Recorder, List]*) – the recorder you want to reset to 'online'.
- **exp\_name**(*str*) – the experiment name. If None, then use *default\_exp\_name*.

**online\_models**(*exp\_name: str = None*) → *list*

Get current *online* models

**Parameters** **exp\_name**(*str*) – the experiment name. If None, then use *default\_exp\_name*.

**Returns** a list of *online* models.

**Return type** *list*

**update\_online\_pred**(*to\_date=None, exp\_name: str = None*)

Update the predictions of online models to *to\_date*.

**Parameters**

- **to\_date**(*pd.Timestamp*) – the pred before this date will be updated. None for updating to latest time in Calendar.
- **exp\_name**(*str*) – the experiment name. If None, then use *default\_exp\_name*.

## RecordUpdater

Updater is a module to update artifacts such as predictions when the stock data is updating.

```
class qlib.workflow.online.update.RMDLoader (rec: qlib.workflow.recorder.Recorder)
 Recorder Model Dataset Loader
```

```
__init__ (rec: qlib.workflow.recorder.Recorder)
 Initialize self. See help(type(self)) for accurate signature.
```

```
get_dataset (start_time, end_time, segments=None) → qlib.data.dataset.DatasetH
 Load, config and setup dataset.
```

This dataset is for inference.

### Parameters

- **start\_time** – the start\_time of underlying data
- **end\_time** – the end\_time of underlying data
- **segments** – dict the segments config for dataset Due to the time series dataset (TSDatasetH), the test segments maybe different from start\_time and end\_time

**Returns** the instance of DatasetH

**Return type** *DatasetH*

```
class qlib.workflow.online.update.RecordUpdater (record:
 qlib.workflow.recorder.Recorder,
 *args, **kwargs)
```

Update a specific recorders

```
__init__ (record: qlib.workflow.recorder.Recorder, *args, **kwargs)
 Initialize self. See help(type(self)) for accurate signature.
```

```
update (*args, **kwargs)
 Update info for specific recorder
```

```
class qlib.workflow.online.update.DSBasedUpdater (record:
 qlib.workflow.recorder.Recorder,
 to_date=None, hist_ref: int = 0,
 freq='day', fname='pred.pkl')
```

Dataset-Based Updater - Provding updating feature for Updating data based on Qlib Dataset

Assumption - Based on Qlib dataset - The data to be updated is a multi-level index pd.DataFrame. For example label , prediction.

LABEL0

datetime instrument 2021-05-10 SH600000 0.006965

SH600004 0.003407

.... 2021-05-28 SZ300498 0.015748

SZ300676 -0.001321

```
__init__ (record: qlib.workflow.recorder.Recorder, to_date=None, hist_ref: int = 0, freq='day',
 fname='pred.pkl')
 Init PredUpdater.
```

### Parameters

- **record** – Recorder
- **to\_date** – update to prediction to the *to\_date*

- **hist\_ref** – int Sometimes, the dataset will have historical depends. Leave the problem to users to set the length of historical dependency

---

**Note:** the start\_time is not included in the hist\_ref

---

**prepare\_data ()** → qlib.data.dataset.DatasetH

Load dataset

Separating this function will make it easier to reuse the dataset

**Returns** the instance of DatasetH

**Return type** *DatasetH*

**update (dataset: qlib.data.dataset.DatasetH = None)**

Update the data in a recorder.

**Parameters** **DatasetH** – the instance of DatasetH. None for reprepae.

**get\_update\_data (dataset: qlib.data.dataset.Dataset)** → pandas.core.frame.DataFrame

return the updated data based on the given dataset

The difference between *get\_update\_data* and *update - update\_date* only include some data specific feature  
- *update* include some general routine steps(e.g. prepare dataset, checking)

**class** qlib.workflow.online.update.**PredUpdater** (*record: qlib.workflow.recorder.Recorder,*  
*to\_date=None, hist\_ref: int = 0,*  
*freq='day', fname='pred.pkl'*)

Update the prediction in the Recorder

**get\_update\_data (dataset: qlib.data.dataset.Dataset)** → pandas.core.frame.DataFrame

return the updated data based on the given dataset

The difference between *get\_update\_data* and *update - update\_date* only include some data specific feature  
- *update* include some general routine steps(e.g. prepare dataset, checking)

**class** qlib.workflow.online.update.**LabelUpdater** (*record: qlib.workflow.recorder.Recorder,*  
*to\_date=None, \*\*kwargs*)

Update the label in the recorder

Assumption - The label is generated from record\_temp.SignalRecord.

**\_\_init\_\_ (record: qlib.workflow.recorder.Recorder, to\_date=None, \*\*kwargs)**

Init PredUpdater.

**Parameters**

- **record** – Recorder
- **to\_date** – update to prediction to the *to\_date*
- **hist\_ref** – int Sometimes, the dataset will have historical depends. Leave the problem to users to set the length of historical dependency

---

**Note:** the start\_time is not included in the hist\_ref

---

**get\_update\_data (dataset: qlib.data.dataset.Dataset)** → pandas.core.frame.DataFrame

return the updated data based on the given dataset

The difference between *get\_update\_data* and *update - update\_date* only include some data specific feature  
- *update* include some general routine steps(e.g. prepare dataset, checking)

## 1.19.6 Utils

### Serializable

Serializable will change the behaviors of pickle. - It only saves the state whose name **does not** start with `_`. It provides a syntactic sugar for distinguish the attributes which user doesn't want. - For examples, a learnable Datahandler just wants to save the parameters without data when dumping to disk

```
qlib.utils.serial.Serializable.dump_all
 will the object dump all object
```

```
qlib.utils.serial.Serializable.exclude
 What attribute will not be dumped
```

## 1.20 Qlib FAQ

### 1.20.1 Qlib Frequently Asked Questions

- 1. *RuntimeError: An attempt has been made to start a new process before the current process has finished its bootstrapping phase...*
- 2. *qlib.data.cache.QlibCacheException: It sees the key(...) of the redis lock has existed in your redis db now.*
- 3. *ModuleNotFoundError: No module named 'qlib.data.\_libs.rolling'*
- 4. *BadNamespaceError: / is not a connected namespace*
- 5. *TypeError: send() got an unexpected keyword argument 'binary'*

#### 1. RuntimeError: An attempt has been made to start a new process before the current process has finished its bootstrapping phase...

```
RuntimeError:
```

```
 An attempt has been made to start a new process before the
 current process has finished its bootstrapping phase.
```

```
 This probably means that you are not using fork to start your
 child processes and you have forgotten to use the proper idiom
 in the main module:
```

```
if __name__ == '__main__':
 freeze_support()
 ...
```

```
 The "freeze_support()" line can be omitted if the program
 is not going to be frozen to produce an executable.
```

This is caused by the limitation of multiprocessing under windows OS. Please refer to [here](#) for more info.

**Solution:** To select a start method you use the `D.features` in the `if __name__ == '__main__'` clause of the main module. For example:

```

import qlib
from qlib.data import D

if __name__ == "__main__":
 qlib.init()
 instruments = ["SH600000"]
 fields = ["$close", "$change"]
 df = D.features(instruments, fields, start_time='2010-01-01', end_time='2012-12-31')
 print(df.head())

```

## 2. qlib.data.cache.QlibCacheException: It sees the key(...) of the redis lock has existed in your redis db now.

It sees the key of the redis lock has existed in your redis db now. You can use the following command to clear your redis keys and rerun your commands

```

$ redis-cli
> select 1
> flushdb

```

If the issue is not resolved, use `keys *` to find if multiple keys exist. If so, try using `flushall` to clear all the keys.

---

**Note:** `qlib.config.redis_task_db` defaults is 1, users can use `qlib.init(redis_task_db=<other_db>)` settings.

---

Also, feel free to post a new issue in our GitHub repository. We always check each issue carefully and try our best to solve them.

## 3. ModuleNotFoundError: No module named 'qlib.data.\_libs.rolling'

```

Do not import qlib package in the repository directory in case of importing qlib_
→from . without compiling #####
Traceback (most recent call last):
File "<stdin>", line 1, in <module>
File "qlib/qlib/__init__.py", line 19, in init
 from .data.cache import H
File "qlib/qlib/data/__init__.py", line 8, in <module>
 from .data import (
File "qlib/qlib/data/data.py", line 20, in <module>
 from .cache import H
File "qlib/qlib/data/cache.py", line 36, in <module>
 from .ops import Operators
File "qlib/qlib/data/ops.py", line 19, in <module>
 from ._libs.rolling import rolling_slope, rolling_rsquare, rolling_resi
ModuleNotFoundError: No module named 'qlib.data._libs.rolling'

```

- If the error occurs when importing qlib package with PyCharm IDE, users can execute the following command in the project root folder to compile Cython files and generate executable files:

```

python setup.py build_ext --inplace

```

- If the error occurs when importing qlib package with command `python`, users need to change the running directory to ensure that the script does not run in the project directory.

#### 4. BadNamespaceError: / is not a connected namespace

```
File "qlib_online.py", line 35, in <module>
 cal = D.calendar()
File "e:\code\python\microsoft\qlib_latest\qlib\qlib\data\data.py", line 973, in _
 ↵calendar
 return Cal.calendar(start_time, end_time, freq, future=future)
File "e:\code\python\microsoft\qlib_latest\qlib\qlib\data\data.py", line 798, in _
 ↵calendar
 self.conn.send_request(
File "e:\code\python\microsoft\qlib_latest\qlib\qlib\data\client.py", line 101, in _
 ↵send_request
 self.sio.emit(request_type + "_request", request_content)
File "G:\apps\miniconda\envs\qlib\lib\site-packages\python_socketio-5.3.0-py3.8.
 ↵egg\socketio\client.py", line 369, in emit
 raise exceptions.BadNamespaceError(
BadNamespaceError: / is not a connected namespace.
```

- The version of `python-socketio` in `qlib` needs to be the same as the version of `python-socketio` in `qlib-server`:

```
pip install -U python-socketio==<qlib-server python-socketio version>
```

#### 5. TypeError: send() got an unexpected keyword argument 'binary'

```
File "qlib_online.py", line 35, in <module>
 cal = D.calendar()
File "e:\code\python\microsoft\qlib_latest\qlib\qlib\data\data.py", line 973, in _
 ↵calendar
 return Cal.calendar(start_time, end_time, freq, future=future)
File "e:\code\python\microsoft\qlib_latest\qlib\qlib\data\data.py", line 798, in _
 ↵calendar
 self.conn.send_request(
File "e:\code\python\microsoft\qlib_latest\qlib\qlib\data\client.py", line 101, in _
 ↵send_request
 self.sio.emit(request_type + "_request", request_content)
File "G:\apps\miniconda\envs\qlib\lib\site-packages\socketio\client.py", line 263, in _
 ↵emit
 self._send_packet(packet.Packet(packet.EVENT, namespace=namespace,
File "G:\apps\miniconda\envs\qlib\lib\site-packages\socketio\client.py", line 339, in _
 ↵_send_packet
 self.eio.send(ep, binary=binary)
TypeError: send() got an unexpected keyword argument 'binary'
```

- The `python-engineio` version needs to be compatible with the `python-socketio` version, reference: <https://github.com/miguelgrinberg/python-socketio#version-compatibility>

```
pip install -U python-engineio==<compatible python-socketio version>
or
pip install -U python-socketio==3.1.2 python-engineio==3.13.2
```

## 1.21 Changelog

Here you can see the full list of changes between each QLib release.

### 1.21.1 Version 0.1.0

This is the initial release of QLib library.

### 1.21.2 Version 0.1.1

Performance optimize. Add more features and operators.

### 1.21.3 Version 0.1.2

- Support operator syntax. Now `High() - Low()` is equivalent to `Sub(High(), Low())`.
- Add more technical indicators.

### 1.21.4 Version 0.1.3

Bug fix and add instruments filtering mechanism.

### 1.21.5 Version 0.2.0

- Redesign `LocalProvider` database format for performance improvement.
- Support load features as string fields.
- Add scripts for database construction.
- More operators and technical indicators.

### 1.21.6 Version 0.2.1

- Support registering user-defined `Provider`.
- Support use operators in string format, e.g. `['Ref($close, 1)']` is valid field format.
- Support dynamic fields in `$some_field` format. And existing fields like `Close()` may be deprecated in the future.

### 1.21.7 Version 0.2.2

- Add `disk_cache` for reusing features (enabled by default).
- Add `qlib.contrib` for experimental model construction and evaluation.

## 1.21.8 Version 0.2.3

- Add backtest module
- Decoupling the Strategy, Account, Position, Exchange from the backtest module

## 1.21.9 Version 0.2.4

- Add profit attribution module
- Add risk\_control and cost\_control strategies

## 1.21.10 Version 0.3.0

- Add estimator module

## 1.21.11 Version 0.3.1

- Add filter module

## 1.21.12 Version 0.3.2

- Add real price trading, if the factor field in the data set is incomplete, use adj\_price trading
- Refactor handler launcher trainer code
- Support backtest configuration parameters in the configuration file
- Fix bug in position amount is 0
- Fix bug of filter module

## 1.21.13 Version 0.3.3

- Fix bug of filter module

## 1.21.14 Version 0.3.4

- Support for finetune model
- Refactor fetcher code

## 1.21.15 Version 0.3.5

- Support multi-label training, you can provide multiple label in handler. (But LightGBM doesn't support due to the algorithm itself)
- Refactor handler code, dataset.py is no longer used, and you can deploy your own labels and features in feature\_label\_config
- Handler only offer DataFrame. Also, trainer and model.py only receive DataFrame
- Change split\_rolling\_data, we roll the data on market calendar now, not on normal date

- Move some date config from handler to trainer

### 1.21.16 Version 0.4.0

- Add *data* package that holds all data-related codes
- Reform the data provider structure
- Create a server for data centralized management ‘[qlib-server<https://amc-msra.visualstudio.com/trading-algo/\\_git/qlib-server>](https://amc-msra.visualstudio.com/trading-algo/_git/qlib-server)‘
- Add a *ClientProvider* to work with server
- Add a pluggable cache mechanism
- Add a recursive backtracking algorithm to inspect the furthest reference date for an expression

**Note:** The `D.instruments` function does not support `start_time`, `end_time`, and `as_list` parameters, if you want to get the results of previous versions of `D.instruments`, you can do this:

```
>>> from qlib.data import D
>>> instruments = D.instruments(market='csi500')
>>> D.list_instruments(instruments=instruments, start_time='2015-01-01', end_time=
←'2016-02-15', as_list=True)
```

---

### 1.21.17 Version 0.4.1

- Add support Windows
- Fix `instruments` type bug
- Fix `features` is empty bug(It will cause failure in updating)
- Fix cache lock and update bug
- Fix use the same cache for the same field (the original space will add a new cache)
- Change “logger handler” from config
- Change model load support 0.4.0 later
- The default value of the `method` parameter of `risk_analysis` function is changed from `ci` to `si`

### 1.21.18 Version 0.4.2

- Refactor DataHandler
- Add Alpha360 DataHandler

### 1.21.19 Version 0.4.3

- Implementing Online Inference and Trading Framework
- Refactoring The interfaces of backtest and strategy module.

## 1.21.20 Version 0.4.4

- Optimize cache generation performance
- Add report module
- Fix bug when using `ServerDatasetCache` offline.
- In the previous version of `long_short_backtest`, there is a case of `np.nan` in `long_short`. The current version 0.4.4 has been fixed, so `long_short_backtest` will be different from the previous version.
- In the 0.4.2 version of `risk_analysis` function, N is 250, and N is 252 from 0.4.3, so 0.4.2 is 0.002122 smaller than the 0.4.3 the backtest result is slightly different between 0.4.2 and 0.4.3.
- **refactor the argument of backtest function.**
  - **NOTE:** - The default arguments of topk margin strategy is changed. Please pass the arguments explicitly if you want to get the same backtest result as previous version. - The `TopkWeightStrategy` is changed slightly. It will try to sell the stocks more than `topk`. (The backtest result of `TopkAmountStrategy` remains the same)
- The margin ratio mechanism is supported in the Topk Margin strategies.

## 1.21.21 Version 0.4.5

- **Add multi-kernel implementation for both client and server.**
  - Support a new way to load data from client which skips dataset cache.
  - Change the default dataset method from single kernel implementation to multi kernel implementation.
- Accelerate the high frequency data reading by optimizing the relative modules.
- Support a new method to write config file by using dict.

## 1.21.22 Version 0.4.6

- **Some bugs are fixed**
  - The default config in *Version 0.4.5* is not friendly to daily frequency data.
  - Backtest error in `TopkWeightStrategy` when `WithInteract=True`.

## 1.21.23 Version 0.5.0

- **First opensource version**
  - Refine the docs, code
  - Add baselines
  - public data crawler

## 1.21.24 Version greater than Version 0.5.0

Please refer to [Github release Notes](#)

---

## Python Module Index

---

### q

qlib.contrib.evaluate, 131  
qlib.contrib.report.analysis\_model.analysis\_model\_performance,  
    139  
qlib.contrib.report.analysis\_position.cumulative\_return,  
    134  
qlib.contrib.report.analysis\_position.rank\_label,  
    137  
qlib.contrib.report.analysis\_position.report,  
    132  
qlib.contrib.report.analysis\_position.risk\_analysis,  
    135  
qlib.contrib.report.analysis\_position.score\_ic,  
    133  
qlib.contrib.strategy.strategy, 129  
qlib.data.base, 93  
qlib.data.data, 83  
qlib.data.dataset.\_\_init\_\_, 113  
qlib.data.dataset.handler, 121  
qlib.data.dataset.loader, 117  
qlib.data.dataset.processor, 125  
qlib.data.filter, 91  
qlib.data.ops, 94  
qlib.model.base, 127  
qlib.model.ens.ensemble, 162  
qlib.model.ens.group, 161  
qlib.model.trainer, 153  
qlib.utils.serial.Serializable, 174  
qlib.workflow.online.manager, 165  
qlib.workflow.online.strategy, 168  
qlib.workflow.online.update, 172  
qlib.workflow.online.utils, 170  
qlib.workflow.record\_temp, 146  
qlib.workflow.task.collect, 158  
qlib.workflow.task.gen, 148  
qlib.workflow.task.manage, 150  
qlib.workflow.task.utils, 163



### Symbols

`__init__()` (*qlib.contrib.strategy.strategy.ListAdjustTimer method*), 129  
`__init__()` (*qlib.contrib.strategy.strategy.StrategyWrapper method*), 129  
`__init__()` (*qlib.contrib.strategy.strategy.TopkDropoutStrategy method*), 130  
`__init__()` (*qlib.contrib.strategy.strategy.WeightStrategyBase method*), 129  
`__init__()` (*qlib.data.base.Feature method*), 93  
`__init__()` (*qlib.data.cache.DiskDatasetCache method*), 108  
`__init__()` (*qlib.data.cache.DiskDatasetCache.IndexManager method*), 109  
`__init__()` (*qlib.data.cache.DiskExpressionCache method*), 108  
`__init__()` (*qlib.data.cache.MemCache method*), 29, 107  
`__init__()` (*qlib.data.cache.MemCacheUnit method*), 29, 106  
`__init__()` (*qlib.data.data.CalendarProvider method*), 83  
`__init__()` (*qlib.data.data.ClientCalendarProvider method*), 88  
`__init__()` (*qlib.data.data.ClientDatasetProvider method*), 89  
`__init__()` (*qlib.data.data.ClientInstrumentProvider method*), 89  
`__init__()` (*qlib.data.data.ClientProvider method*), 90  
`__init__()` (*qlib.data.data.ExpressionProvider method*), 85  
`__init__()` (*qlib.data.data.FeatureProvider method*), 85  
`__init__()` (*qlib.data.data.InstrumentProvider method*), 84  
`__init__()` (*qlib.data.data.LocalCalendarProvider method*), 86  
`__init__()` (*qlib.data.data.LocalDatasetProvider method*), 88  
`__init__()` (*qlib.data.data.LocalFeatureProvider method*), 87  
`__init__()` (*qlib.data.dataset.\_\_init\_\_.Dataset method*), 113  
`__init__()` (*qlib.data.dataset.\_\_init\_\_.DatasetH method*), 28, 114  
`__init__()` (*qlib.data.dataset.TSDataSampler method*), 115  
`__init__()` (*qlib.data.dataset.\_\_init\_\_.TSDatasetH method*), 116  
`__init__()` (*qlib.data.dataset.handler.DataHandler method*), 121  
`__init__()` (*qlib.data.dataset.handler.DataHandlerLP method*), 24, 123  
`__init__()` (*qlib.data.dataset.loader.DLWParser method*), 118  
`__init__()` (*qlib.data.dataset.loader.DataLoaderDH method*), 120  
`__init__()` (*qlib.data.dataset.loader.QlibDataLoader method*), 119  
`__init__()` (*qlib.data.dataset.loader.StaticDataLoader method*), 119  
`__init__()` (*qlib.data.dataset.processor.CSRankNorm method*), 127  
`__init__()` (*qlib.data.dataset.processor.CSZFillna method*), 127  
`__init__()` (*qlib.data.dataset.processor.CSZScoreNorm method*), 127  
`__init__()` (*qlib.data.dataset.processor.DropCol method*), 126  
`__init__()` (*qlib.data.dataset.processor.DropnaLabel method*), 126  
`__init__()` (*qlib.data.dataset.processor.DropnaProcessor method*), 125  
`__init__()` (*qlib.data.dataset.processor.Fillna method*), 126  
`__init__()` (*qlib.data.dataset.processor.FilterCol method*), 126  
`__init__()` (*qlib.data.dataset.processor.MinMaxNorm method*)

`method), 126`  
`__init__() (qlib.data.dataset.processor.RobustZScoreNorm method), 127`  
`__init__() (qlib.data.dataset.processor.ZScoreNorm method), 126`  
`__init__() (qlib.data.filter.BaseDFilter method), 91`  
`__init__() (qlib.data.filter.ExpressionDFilter method), 92`  
`__init__() (qlib.data.filter.NameDFilter method), 92`  
`__init__() (qlib.data.filter.SeriesDFilter method), 91`  
`__init__() (qlib.data.ops.Abs method), 94`  
`__init__() (qlib.data.ops.Add method), 96`  
`__init__() (qlib.data.ops.And method), 99`  
`__init__() (qlib.data.ops.Corr method), 106`  
`__init__() (qlib.data.ops.Count method), 104`  
`__init__() (qlib.data.ops.Cov method), 106`  
`__init__() (qlib.data.ops.Delta method), 104`  
`__init__() (qlib.data.ops.Div method), 97`  
`__init__() (qlib.data.ops.EMA method), 105`  
`__init__() (qlib.data.ops.ElemOperator method), 94`  
`__init__() (qlib.data.ops.Eq method), 98`  
`__init__() (qlib.data.ops.Ge method), 98`  
`__init__() (qlib.data.ops.Greater method), 97`  
`__init__() (qlib.data.ops.Gt method), 98`  
`__init__() (qlib.data.ops.IdxMax method), 102`  
`__init__() (qlib.data.ops.IdxMin method), 103`  
`__init__() (qlib.data.ops.If method), 99`  
`__init__() (qlib.data.ops.Kurt method), 102`  
`__init__() (qlib.data.ops.Le method), 98`  
`__init__() (qlib.data.ops.Less method), 97`  
`__init__() (qlib.data.ops.Log method), 95`  
`__init__() (qlib.data.ops.Lt method), 98`  
`__init__() (qlib.data.ops.Mad method), 103`  
`__init__() (qlib.data.ops.Mask method), 95`  
`__init__() (qlib.data.ops.Max method), 102`  
`__init__() (qlib.data.ops.Mean method), 101`  
`__init__() (qlib.data.ops.Med method), 103`  
`__init__() (qlib.data.ops.Min method), 102`  
`__init__() (qlib.data.ops.Mul method), 97`  
`__init__() (qlib.data.ops.Ne method), 99`  
`__init__() (qlib.data.ops.Not method), 95`  
`__init__() (qlib.data.ops.NpElemOperator method), 94`  
`__init__() (qlib.data.ops.NpPairOperator method), 96`  
`__init__() (qlib.data.ops.OpsWrapper method), 106`  
`__init__() (qlib.data.ops.Or method), 99`  
`__init__() (qlib.data.ops.PairOperator method), 96`  
`__init__() (qlib.data.ops.PairRolling method), 105`  
`__init__() (qlib.data.ops.Power method), 95`  
`__init__() (qlib.data.ops.Quantile method), 103`  
`__init__() (qlib.data.ops.Rank method), 103`  
`__init__() (qlib.data.ops.Ref method), 100`  
`__init__() (qlib.data.ops.Resi method), 105`  
`__init__() (qlib.data.ops.Rolling method), 100`  
`__init__() (qlib.data.ops.Rsquare method), 104`  
`__init__() (qlib.data.ops.Sign method), 95`  
`__init__() (qlib.data.ops.Skew method), 102`  
`__init__() (qlib.data.ops.Slope method), 104`  
`__init__() (qlib.data.ops.Std method), 101`  
`__init__() (qlib.data.ops.Sub method), 96`  
`__init__() (qlib.data.ops.Sum method), 101`  
`__init__() (qlib.data.ops.Var method), 101`  
`__init__() (qlib.data.ops.WMA method), 105`  
`__init__() (qlib.data.storage.file_storage.FileCalendarStorage method), 112`  
`__init__() (qlib.data.storage.file_storage.FileFeatureStorage method), 112`  
`__init__() (qlib.data.storage.file_storage.FileInstrumentStorage method), 112`  
`__init__() (qlib.data.storage.storage.CalendarStorage method), 110`  
`__init__() (qlib.data.storage.storage.FeatureStorage method), 111`  
`__init__() (qlib.data.storage.storage.InstrumentStorage method), 110`  
`__init__() (qlib.model.ens.group.Group method), 161`  
`__init__() (qlib.model.ens.group.RollingGroup method), 162`  
`__init__() (qlib.model.trainer.DelayTrainerR method), 156`  
`__init__() (qlib.model.trainer.DelayTrainerRM method), 157`  
`__init__() (qlib.model.trainer.Trainer method), 82, 154`  
`__init__() (qlib.model.trainer.TrainerR method), 155`  
`__init__() (qlib.model.trainer.TrainerRM method), 156`  
`__init__() (qlib.workflow.__init__.QlibRecorder method), 40`  
`__init__() (qlib.workflow.exp.Experiment method), 49, 142`  
`__init__() (qlib.workflow.expm.ExpManager method), 47, 140`  
`__init__() (qlib.workflow.online.manager.OnlineManager method), 67, 166`  
`__init__() (qlib.workflow.online.strategy.OnlineStrategy method), 69, 168`  
`__init__() (qlib.workflow.online.strategy.RollingStrategy method), 70, 169`  
`__init__() (qlib.workflow.online.update.DSBasedUpdater method), 74, 172`  
`__init__() (qlib.workflow.online.update.LabelUpdater method), 74, 173`  
`__init__() (qlib.workflow.online.update.RMDLoader method), 73, 172`  
`__init__() (qlib.workflow.online.update.RecordUpdater`

*method), 73, 172*

*\_\_init\_\_() (qlib.workflow.online.utils.OnlineTool method), 71, 170*

*\_\_init\_\_() (qlib.workflow.online.utils.OnlineToolR method), 72, 171*

*\_\_init\_\_() (qlib.workflow.record\_temp.HFSignalRecord method), 147*

*\_\_init\_\_() (qlib.workflow.record\_temp.PortAnaRecord method), 148*

*\_\_init\_\_() (qlib.workflow.record\_temp.RecordTemp method), 146*

*\_\_init\_\_() (qlib.workflow.record\_temp.SigAnaRecord method), 147*

*\_\_init\_\_() (qlib.workflow.record\_temp.SignalRecord method), 146*

*\_\_init\_\_() (qlib.workflow.recorder.Recorder method), 51, 144*

*\_\_init\_\_() (qlib.workflow.task.collect.Collector method), 159*

*\_\_init\_\_() (qlib.workflow.task.collect.MergeCollector method), 159*

*\_\_init\_\_() (qlib.workflow.task.collect.RecorderCollector method), 160*

*\_\_init\_\_() (qlib.workflow.task.gen.RollingGen method), 149*

*\_\_init\_\_() (qlib.workflow.task.manage.TaskManager method), 79, 151*

*\_\_init\_\_() (qlib.workflow.task.utils.TimeAdjuster method), 163*

**A**

*Abs (class in qlib.data.ops), 94*

*Add (class in qlib.data.ops), 96*

*add\_strategy() (qlib.workflow.online.manager.OnlineManager method), 68, 167*

*AdjustTimer (class in qlib.contrib.strategy.strategy), 129*

*align\_idx() (qlib.workflow.task.utils.TimeAdjuster method), 164*

*align\_seg() (qlib.workflow.task.utils.TimeAdjuster method), 164*

*align\_time() (qlib.workflow.task.utils.TimeAdjuster method), 164*

*And (class in qlib.data.ops), 99*

*AverageEnsemble (class in qlib.model.ens.ensemble), 162*

**B**

*backtest () (in module qlib.contrib.evaluate), 131*

*BaseDFilter (class in qlib.data.filter), 91*

*BaseModel (class in qlib.model.base), 127*

*BaseProvider (class in qlib.data.data), 89*

*BaseProviderWrapper (in module qlib.data.data), 90*

*BaseStorage (class in qlib.data.storage.storage), 110*

*begin\_task\_train() (in module qlib.model.trainer), 154*

*build\_index() (qlib.data.dataset.\_\_init\_\_.TSDataset static method), 116*

**C**

*cache\_to\_origin\_data() (qlib.data.cache.DatasetCache static method), 31, 108*

*cache\_walker() (qlib.data.data.LocalDatasetProvider static method), 88*

*cal\_interval() (qlib.workflow.task.utils.TimeAdjuster method), 164*

*calendar() (qlib.data.data.CalendarProvider method), 83*

*calendar() (qlib.data.data.ClientCalendarProvider method), 88*

*calendar() (qlib.data.data.LocalCalendarProvider method), 86*

*CalendarProvider (class in qlib.data.data), 83*

*CalendarProviderWrapper (in module qlib.data.data), 90*

*CalendarStorage (class in qlib.data.storage.storage), 110*

*check() (qlib.data.storage.file\_storage.FileStorageMixin method), 112*

*check() (qlib.workflow.record\_temp.RecordTemp method), 146*

*ClientCalendarProvider (class in qlib.data.data), 88*

*ClientDatasetProvider (class in qlib.data.data), 89*

*InstrumentProvider (class in qlib.data.data), 89*

*ClientProvider (class in qlib.data.data), 90*

*collect() (qlib.workflow.task.collect.Collector method), 159*

*collect() (qlib.workflow.task.collect.MergeCollector method), 160*

*collect() (qlib.workflow.task.collect.RecorderCollector method), 160*

*Collector (class in qlib.workflow.task.collect), 158*

*commit\_task\_res() (qlib.workflow.task.manage.TaskManager method), 81, 152*

*config() (qlib.data.dataset.\_\_init\_\_.Dataset method), 113*

*config() (qlib.data.dataset.\_\_init\_\_.DatasetH method), 28, 114*

*config() (qlib.data.dataset.\_\_init\_\_.TSDatasetH method), 117*

*config() (qlib.data.dataset.handler.DataHandler method), 121*

**D**  
 config() (*qlib.data.dataset.handler.DataHandlerLP method*), 25, 124  
 config() (*qlib.data.dataset.processor.Processor method*), 125  
 Corr (*class in qlib.data.ops*), 105  
 Count (*class in qlib.data.ops*), 103  
 Cov (*class in qlib.data.ops*), 106  
 create\_exp () (*qlib.workflow.expm.ExpManager method*), 48, 141  
 create\_recorder () (*qlib.workflow.exp.Experiment method*), 50, 143  
 create\_task () (*qlib.workflow.task.manage.TaskManager method*), 80, 151  
 CSRankNorm (*class in qlib.data.dataset.processor*), 127  
 CSZFillna (*class in qlib.data.dataset.processor*), 127  
 CSZScoreNorm (*class in qlib.data.dataset.processor*), 127  
 cumulative\_return\_graph () (*in module qlib.contrib.report.analysis\_position.cumulative\_return*), 134

**E**  
 data (*qlib.data.storage.file\_storage.FileCalendarStorage attribute*), 112  
 data (*qlib.data.storage.file\_storage.FileFeatureStorage attribute*), 112  
 data (*qlib.data.storage.file\_storage.FileInstrumentStorage attribute*), 112  
 data (*qlib.data.storage.storage.CalendarStorage attribute*), 110  
 data (*qlib.data.storage.storage.FeatureStorage attribute*), 111  
 data (*qlib.data.storage.storage.InstrumentStorage attribute*), 110  
 DataHandler (*class in qlib.data.dataset.handler*), 121  
 DataHandlerLP (*class in qlib.data.dataset.handler*), 24, 123  
 DataLoader (*class in qlib.data.dataset.loader*), 23, 117  
 DataLoaderDH (*class in qlib.data.dataset.loader*), 120  
 Dataset (*class in qlib.data.dataset.\_\_init\_\_*), 113  
 dataset () (*qlib.data.cache.DatasetCache method*), 31, 107  
 dataset () (*qlib.data.data.ClientDatasetProvider method*), 89  
 dataset () (*qlib.data.data.DatasetProvider method*), 85  
 dataset () (*qlib.data.data.LocalDatasetProvider method*), 88  
 dataset\_processor () (*qlib.data.data.DatasetProvider static method*), 86  
 DatasetCache (*class in qlib.data.cache*), 30, 107  
 DatasetH (*class in qlib.data.dataset.\_\_init\_\_*), 28, 114  
 DatasetProvider (*class in qlib.data.data*), 85

DatasetProviderWrapper (*in module qlib.data.data*), 90  
 default\_uri (*qlib.workflow.expm.ExpManager attribute*), 49, 142  
 delay\_prepare () (*qlib.workflow.online.manager.OnlineManager method*), 69, 168  
 DelayTrainerR (*class in qlib.model.trainer*), 155  
 DelayTrainerRM (*class in qlib.model.trainer*), 157  
 delete\_exp () (*qlib.workflow.\_\_init\_\_.QlibRecorder method*), 44  
 delete\_exp () (*qlib.workflow.expm.ExpManager method*), 49, 142  
 delete\_recorder () (*qlib.workflow.\_\_init\_\_.QlibRecorder method*), 45  
 delete\_recorder () (*qlib.workflow.exp.Experiment method*), 50, 143  
 delete\_tags () (*qlib.workflow.recorder.Recorder method*), 52, 145  
 Delta (*class in qlib.data.ops*), 104  
 DiskDatasetCache (*class in qlib.data.cache*), 108  
 DiskDatasetCache.IndexManager (*class in qlib.data.cache*), 109  
 DiskExpressionCache (*class in qlib.data.cache*), 108  
 Div (*class in qlib.data.ops*), 97  
 DLWParser (*class in qlib.data.dataset.loader*), 118  
 DropCol (*class in qlib.data.dataset.processor*), 126  
 DropnaLabel (*class in qlib.data.dataset.processor*), 126  
 DropnaProcessor (*class in qlib.data.dataset.processor*), 125  
 DSBasedUpdater (*class in qlib.workflow.online.update*), 73, 172  
 dump\_all (*in module qlib.utils.serial.Serializable*), 174

**E**  
 ElemOperator (*class in qlib.data.ops*), 94  
 EMA (*class in qlib.data.ops*), 105  
 end () (*qlib.workflow.exp.Experiment method*), 50, 143  
 end\_exp () (*qlib.workflow.\_\_init\_\_.QlibRecorder method*), 41  
 end\_exp () (*qlib.workflow.expm.ExpManager method*), 47, 141  
 end\_index (*qlib.data.storage.file\_storage.FileFeatureStorage attribute*), 113  
 end\_index (*qlib.data.storage.storage.FeatureStorage attribute*), 111  
 end\_run () (*qlib.workflow.recorder.Recorder method*), 52, 145  
 end\_task\_train () (*in module qlib.model.trainer*), 154  
 end\_train () (*qlib.model.trainer.DelayTrainerR method*), 156

end\_train() (*qlib.model.trainer.DelayTrainerRM method*), 158  
 end\_train() (*qlib.model.trainer.Trainer method*), 82, 154  
 end\_train() (*qlib.model.trainer.TrainerR method*), 155  
 end\_train() (*qlib.model.trainer.TrainerRM method*), 157  
**Ensemble** (*class in qlib.model.ens.ensemble*), 162  
**Eq** (*class in qlib.data.ops*), 98  
**exclude** (*in module qlib.utils.serial.Serializable*), 174  
**Experiment** (*class in qlib.workflow.exp*), 49, 142  
**ExpManager** (*class in qlib.workflow.expm*), 47, 140  
**Expression** (*class in qlib.data.base*), 93  
**expression()** (*qlib.data.cache.ExpressionCache method*), 30, 107  
**expression()** (*qlib.data.data.ExpressionProvider method*), 85  
**expression()** (*qlib.data.data.LocalExpressionProvider method*), 87  
**expression\_calculator()** (*qlib.data.data.DatasetProvider static method*), 86  
**ExpressionCache** (*class in qlib.data.cache*), 30, 107  
**ExpressionDFilter** (*class in qlib.data.filter*), 92  
**ExpressionOps** (*class in qlib.data.base*), 93  
**ExpressionProvider** (*class in qlib.data.data*), 85  
**ExpressionProviderWrapper** (*in module qlib.data.data*), 90

**F**

**Feature** (*class in qlib.data.base*), 93  
**feature()** (*qlib.data.data.FeatureProvider method*), 85  
**feature()** (*qlib.data.data.LocalFeatureProvider method*), 87  
**FeatureProvider** (*class in qlib.data.data*), 85  
**FeatureProviderWrapper** (*in module qlib.data.data*), 90  
**features()** (*qlib.data.data.BaseProvider method*), 89  
**features\_uri()** (*qlib.data.data.LocalProvider method*), 90  
**FeatureStorage** (*class in qlib.data.storage.storage*), 111  
**fetch()** (*qlib.data.dataset.handler.DataHandler method*), 122  
**fetch()** (*qlib.data.dataset.handler.DataHandlerLP method*), 25, 124  
**fetch\_task()** (*qlib.workflow.task.manage.TaskManager method*), 80, 151  
**FileCalendarStorage** (*class in qlib.data.storage.file\_storage*), 112  
**FileFeatureStorage** (*class in qlib.data.storage.file\_storage*), 112  
**FileInstrumentStorage** (*class in qlib.data.storage.file\_storage*), 112  
**FileStorageMixin** (*class in qlib.data.storage.file\_storage*), 112  
**Fillna** (*class in qlib.data.dataset.processor*), 126  
**filter\_main()** (*qlib.data.filter.SeriesDFilter method*), 91  
**FilterCol** (*class in qlib.data.dataset.processor*), 126  
**finetune()** (*qlib.model.base.ModelFT method*), 128  
**first\_tasks()** (*qlib.workflow.online.strategy.OnlineStrategy method*), 70, 169  
**first\_tasks()** (*qlib.workflow.online.strategy.RollingStrategy method*), 71, 170  
**first\_train()** (*qlib.workflow.online.manager.OnlineManager method*), 67, 166  
**fit()** (*qlib.data.dataset.handler.DataHandlerLP method*), 25, 124  
**fit()** (*qlib.data.dataset.processor.MinMaxNorm method*), 126  
**fit()** (*qlib.data.dataset.processor.Processor method*), 125  
**fit()** (*qlib.data.dataset.processor.RobustZScoreNorm method*), 127  
**fit()** (*qlib.data.dataset.processor.ZScoreNorm method*), 127  
**fit()** (*qlib.model.base.Model method*), 32, 127  
**fit\_process\_data()** (*qlib.data.dataset.handler.DataHandlerLP method*), 25, 124  
**from\_config()** (*qlib.data.filter.BaseDFilter static method*), 91  
**from\_config()** (*qlib.data.filter.ExpressionDFilter static method*), 92  
**from\_config()** (*qlib.data.filter.NameDFilter static method*), 92

**G**

**Ge** (*class in qlib.data.ops*), 98  
**gen\_dataset\_cache()** (*qlib.data.cache.DiskDatasetCache method*), 109  
**gen\_expression\_cache()** (*qlib.data.cache.DiskExpressionCache method*), 108  
**gen\_following\_tasks()** (*qlib.workflow.task.gen.RollingGen method*), 149  
**generate()** (*qlib.workflow.record\_temp.HFSignalRecord method*), 147  
**generate()** (*qlib.workflow.record\_temp.PortAnaRecord method*), 148  
**generate()** (*qlib.workflow.record\_temp.RecordTemp method*), 146

```
generate() (qlib.workflow.record_temp.SigAnaRecord get_extended_window_size()
 method), 147 (qlib.data.ops.Rolling method), 100
generate() (qlib.workflow.record_temp.SignalRecord get_group_columns() (in module
 method), 146 qlib.data.dataset.processor), 125
generate() (qlib.workflow.task.gen.RollingGen get_index() (qlib.data.dataset.__init__.TSDDataSampler
 method), 149 method), 116
generate() (qlib.workflow.task.gen.TaskGen method), get_instruments_d()
 78, 148 (qlib.data.data.DatasetProvider static method),
get_generate_order_list() 86
 (qlib.contrib.strategy.strategy.TopkDropoutStrategy
 method), 130 get_longest_back_rolling()
 (qlib.contrib.strategy.strategy.WeightStrategyBase
 method), 130 (qlib.data.base.Expression method), 93
get_generate_order_list() get_longest_back_rolling()
 (qlib.contrib.strategy.strategy.WeightStrategyBase
 method), 130 (qlib.data.base.Feature method), 93
get_generate_target_weight_position() get_longest_back_rolling()
 (qlib.contrib.strategy.strategy.WeightStrategyBase
 method), 129 (qlib.data.ops.ElemOperator method), 94
get() (qlib.workflow.task.utils.TimeAdjuster method), get_longest_back_rolling()
 163 (qlib.data.ops.PairOperator method), 96
get_collector() (qlib.workflow.online.manager.OnlineManager
 method), 68, 167 get_longest_back_rolling()
 (qlib.data.ops.PairRolling method), 105
get_collector() (qlib.workflow.online.strategy.OnlineStrategy
 method), 70, 169 get_longest_back_rolling() (qlib.data.ops.Ref
 method), 100
get_collector() (qlib.workflow.online.strategy.RollingStrategy
 method), 70, 169 get_longest_back_rolling()
 (qlib.data.ops.Rolling method), 100
get_cols() (qlib.data.dataset.handler.DataHandler
 method), 122 get_mongodb() (in module qlib.workflow.task.utils),
 163
get_cols() (qlib.data.dataset.handler.DataHandlerLP
 method), 26, 124 get_online_tag() (qlib.workflow.online.utils.OnlineTool
 method), 71, 170
get_column_names() (qlib.data.data.DatasetProvider
 static method), 86 get_online_tag() (qlib.workflow.online.utils.OnlineToolR
 method), 72, 171
get_dataset() (qlib.workflow.online.update.RMDLoader
 method), 73, 172 get_range_iterator()
 (qlib.data.dataset.handler.DataHandler
 method), 123
get_exp() (qlib.workflow.__init__.QlibRecorder
 method), 43 get_range_selector()
 (qlib.data.dataset.handler.DataHandler
 method), 123
get_exp() (qlib.workflow.expm.ExpManager method),
 48, 141 get_recorder() (qlib.workflow.__init__.QlibRecorder
 method), 44
get_exp_name() (qlib.workflow.task.collect.RecorderCollector
 method), 160 get_recorder() (qlib.workflow.exp.Experiment
 method), 50, 143
get_extended_window_size() (qlib.data.base.Expression
 method), 93 get_risk_degree()
 (qlib.contrib.strategy.strategy.TopkDropoutStrategy
 method), 130
get_extended_window_size() (qlib.data.base.Feature
 method), 93 get_signals() (qlib.workflow.online.manager.OnlineManager
 method), 69, 167
get_extended_window_size() (qlib.data.ops.ElemOperator
 method), 94 get_update_data()
 (qlib.workflow.online.update.DSBasedUpdater
 method), 74, 173
get_extended_window_size() (qlib.data.ops.If
 method), 99 get_update_data()
 (qlib.workflow.online.update.LabelUpdater
 method), 75, 173
get_extended_window_size() (qlib.data.ops.PairOperator
 method), 96 get_update_data()
 (qlib.workflow.online.update.PredUpdater
 method), 105
```

*method), 74, 173*  
*get\_uri () (qlib.workflow.\_\_init\_\_.QlibRecorder method), 44*  
*Greater (class in qlib.data.ops), 97*  
*Group (class in qlib.model.ens.group), 161*  
*group () (qlib.model.ens.group.Group method), 161*  
*group () (qlib.model.ens.group.RollingGroup method), 161*  
*Gt (class in qlib.data.ops), 97*

**H**

*handler\_mod () (in module qlib.workflow.task.gen), 148*  
*HFSignalRecord (class in qlib.workflow.record\_temp), 147*

**I**

*ic\_figure () (in module qlib.contrib.report.analysis\_model.analysis\_model\_perform method), 62, 139*  
*IdxMax (class in qlib.data.ops), 102*  
*IdxMin (class in qlib.data.ops), 102*  
*If (class in qlib.data.ops), 99*  
*index () (qlib.data.storage.file\_storage.FileCalendarStorage method), 112*  
*index () (qlib.data.storage.storage.CalendarStorage method), 110*  
*insert\_task () (qlib.workflow.task.manage.TaskManager method), 79, 151*  
*insert\_task\_def () (qlib.workflow.task.manage.TaskManager method), 80, 151*

*InstrumentProvider (class in qlib.data.data), 84*  
*InstrumentProviderWrapper (in module qlib.data.data), 90*  
*instruments () (qlib.data.data.InstrumentProvider static method), 84*  
*InstrumentStorage (class in qlib.data.storage.storage), 110*  
*is\_adjust () (qlib.contrib.strategy.strategy.AdjustTimer method), 129*  
*is\_adjust () (qlib.contrib.strategy.strategy.ListAdjustTimer method), 129*  
*is\_delay () (qlib.model.trainer.Trainer method), 83, 155*  
*is\_for\_infer () (qlib.data.dataset.processor.DropnaLabel method), 126*  
*is\_for\_infer () (qlib.data.dataset.processor.Processor method), 125*

**K**

*Kurt (class in qlib.data.ops), 102*

**L**

*LabelUpdater (class in qlib.workflow.online.update), 74, 173*  
*Le (class in qlib.data.ops), 98*  
*Less (class in qlib.data.ops), 97*  
*limited (qlib.data.cache.MemCacheUnit attribute), 29, 107*  
*list () (qlib.workflow.record\_temp.HFSignalRecord method), 147*  
*list () (qlib.workflow.record\_temp.PortAnaRecord method), 148*  
*list () (qlib.workflow.record\_temp.RecordTemp method), 146*  
*list () (qlib.workflow.record\_temp.SigAnaRecord method), 147*  
*list () (qlib.workflow.record\_temp.SignalRecord method), 146*  
*list () (qlib.workflow.task.manage.TaskManager static method), 79, 151*  
*list\_artifacts () (qlib.workflow.recorder.Recorder method), 52, 145*  
*list\_experiments () (qlib.workflow.\_\_init\_\_.QlibRecorder method), 42*  
*list\_experiments () (qlib.workflow.expm.ExpManager method), 49, 142*  
*list\_instruments () (qlib.data.data.ClientInstrumentProvider method), 89*  
*list\_instruments () (qlib.data.data.InstrumentProvider method), 84*  
*list\_instruments () (qlib.data.data.LocalInstrumentProvider method), 87*  
*list\_metrics () (qlib.workflow.recorder.Recorder method), 52, 145*  
*list\_params () (qlib.workflow.recorder.Recorder method), 52, 145*  
*list\_recorders () (in module qlib.workflow.task.utils), 163*  
*list\_recorders () (qlib.workflow.\_\_init\_\_.QlibRecorder method), 42*  
*list\_recorders () (qlib.workflow.exp.Experiment method), 51, 144*  
*list\_tags () (qlib.workflow.recorder.Recorder method), 53, 145*  
*ListAdjustTimer (class in qlib.contrib.strategy.strategy), 129*  
*load () (qlib.data.base.Expression method), 93*  
*load () (qlib.data.dataset.loader.DataLoader method), 23, 117*  
*load () (qlib.data.dataset.loader.DataLoaderDH*

*method), 120*  
 load() (*qlib.data.dataset.loader.DLWParser method*), 118  
 load() (*qlib.data.dataset.loader.StaticDataLoader method*), 119  
 load() (*qlib.workflow.record\_temp.RecordTemp method*), 146  
 load() (*qlib.workflow.record\_temp.SignalRecord method*), 147  
 load\_calendar() (*qlib.data.data.LocalCalendarProvider method*), 86  
 load\_group\_df() (*qlib.data.dataset.loader.DLWParser method*), 118  
 load\_group\_df() (*qlib.data.dataset.loader.QlibDataLoader method*), 119  
 load\_object() (*qlib.workflow.\_\_init\_\_.QlibRecorder method*), 46  
 load\_object() (*qlib.workflow.recorder.Recorder method*), 52, 145  
 LocalCalendarProvider (*class in qlib.data.data*), 86  
 LocalDatasetProvider (*class in qlib.data.data*), 88  
 LocalExpressionProvider (*class in qlib.data.data*), 87  
 LocalFeatureProvider (*class in qlib.data.data*), 87  
 LocalInstrumentProvider (*class in qlib.data.data*), 87  
 LocalProvider (*class in qlib.data.data*), 90  
 locate\_index() (*qlib.data.data.CalendarProvider method*), 84  
 Log (*class in qlib.data.ops*), 95  
 log\_metrics() (*qlib.workflow.\_\_init\_\_.QlibRecorder method*), 46  
 log\_metrics() (*qlib.workflow.recorder.Recorder method*), 52, 145  
 log\_params() (*qlib.workflow.\_\_init\_\_.QlibRecorder method*), 46  
 log\_params() (*qlib.workflow.recorder.Recorder method*), 52, 145  
 long\_short\_backtest() (*in module qlib.contrib.evaluate*), 132  
 Lt (*class in qlib.data.ops*), 98

**M**

Mad (*class in qlib.data.ops*), 103  
 Mask (*class in qlib.data.ops*), 95  
 Max (*class in qlib.data.ops*), 102  
 max() (*qlib.workflow.task.utils.TimeAdjuster method*), 164  
 Mean (*class in qlib.data.ops*), 100  
 Med (*class in qlib.data.ops*), 103  
 MemCache (*class in qlib.data.cache*), 29, 107

MemCacheUnit (*class in qlib.data.cache*), 29, 106  
 MergeCollector (*class in qlib.workflow.task.collect*), 159  
 Min (*class in qlib.data.ops*), 102  
 MinMaxNorm (*class in qlib.data.dataset.processor*), 126  
 Model (*class in qlib.model.base*), 32, 127  
 model\_performance\_graph() (*in module qlib.contrib.report.analysis\_model.analysis\_model\_performance*), 62, 139  
 ModelFT (*class in qlib.model.base*), 128  
 Mul (*class in qlib.data.ops*), 96  
 multi\_cache\_walker() (*qlib.data.data.LocalDatasetProvider static method*), 88

**N**

NameDFilter (*class in qlib.data.filter*), 92  
 Ne (*class in qlib.data.ops*), 98  
 normalize\_uri\_args() (*qlib.data.cache.DatasetCache static method*), 31, 108  
 Not (*class in qlib.data.ops*), 95  
 NpElemOperator (*class in qlib.data.ops*), 94  
 NpPairOperator (*class in qlib.data.ops*), 96

**O**

online\_models() (*qlib.workflow.online.utils.OnlineTool method*), 72, 170  
 online\_models() (*qlib.workflow.online.utils.OnlineToolR method*), 72, 171  
 OnlineManager (*class in qlib.workflow.online.manager*), 67, 166  
 OnlineStrategy (*class in qlib.workflow.online.strategy*), 69, 168  
 OnlineTool (*class in qlib.workflow.online.utils*), 71, 170  
 OnlineToolR (*class in qlib.workflow.online.utils*), 72, 171  
 OpsWrapper (*class in qlib.data.ops*), 106  
 Or (*class in qlib.data.ops*), 99

**P**

PairOperator (*class in qlib.data.ops*), 95  
 PairRolling (*class in qlib.data.ops*), 105  
 PortAnaRecord (*class in qlib.workflow.record\_temp*), 147  
 Power (*class in qlib.data.ops*), 95  
 predict() (*qlib.model.base.BaseModel method*), 127  
 predict() (*qlib.model.base.Model method*), 33, 128  
 PredUpdater (*class in qlib.workflow.online.update*), 74, 173  
 prepare() (*qlib.data.dataset.\_\_init\_\_.Dataset method*), 114

prepare() (*qlib.data.dataset.\_\_init\_\_.DatasetH* *qlib.workflow.online.manager* (*module*), 66,  
*method*), 28, 115  
 prepare\_data() (*qlib.workflow.online.update.DSBasedUpdate* *qlib.workflow.online.strategy* (*module*), 69,  
*method*), 74, 173  
 prepare\_online\_models() (*qlib.workflow.online.strategy.OnlineStrategy*  
*method*), 70, 168  
 prepare\_signals() (*qlib.workflow.online.manager.OnlineManager*  
*method*), 68, 167  
 prepare\_tasks() (*qlib.workflow.online.strategy.OnlineStrategy*  
*method*), 69, 168  
 prepare\_tasks() (*qlib.workflow.online.strategy.RollingString* *qlib.data.dataset.loader*,  
*method*), 71, 170  
 prioritize() (*qlib.workflow.task.manage.TaskManager*  
*method*), 81, 153  
 process\_collect() (*qlib.workflow.task.collect.Collector* static  
*method*), 159  
 process\_data() (*qlib.data.dataset.handler.DataHandler*  
*method*), 25, 124  
 ProcessInf (*class in qlib.data.dataset.processor*), 126  
 Processor (*class in qlib.data.dataset.processor*), 125

**Q**

qlib.contrib.evaluate (*module*), 131  
 qlib.contrib.report.analysis\_model.analyse\_stdndata\_fenofache() (*qlib.data.cache.DiskDatasetCache* class  
*method*), 62, 139  
 qlib.contrib.report.analysis\_position.cumulative () (*qlib.data.dataset.processor.DropCol*  
*method*), 134  
 qlib.contrib.report.analysis\_position.rank\_label () (*qlib.data.dataset.processor.DropnaProcessor*  
*method*), 137  
 qlib.contrib.report.analysis\_position.report () (*qlib.data.dataset.processor.FilterCol*  
*method*), 55, 132  
 qlib.contrib.report.analysis\_position.risk\_analyse () (*qlib.data.dataset.processor.Processor*  
*method*), 58, 135  
 qlib.contrib.report.analysis\_position.score\_ic () (*qlib.data.storage.storage.FeatureStorage*  
*method*), 125  
 qlib.contrib.strategy.strategy (*module*), 129  
 qlib.data.base (*module*), 93  
 qlib.data.data (*module*), 83  
 qlib.data.dataset.\_\_init\_\_ (*module*), 113  
 qlib.data.dataset.handler (*module*), 121  
 qlib.data.dataset.loader (*module*), 117  
 qlib.data.dataset.processor (*module*), 125  
 qlib.data.filter (*module*), 91  
 qlib.data.ops (*module*), 94  
 qlib.model.base (*module*), 127  
 qlib.model.ens.ensemble (*module*), 162  
 qlib.model.ens.group (*module*), 161  
 qlib.model.trainer (*module*), 153  
 qlib.utils.serial.Serializable (*module*), 174

**R**

Rank (*class in qlib.data.ops*), 103  
 rank\_label\_graph() (in *qlib.contrib.report.analysis\_position.rank\_label* module  
*method*), 137  
 re\_query() (*qlib.workflow.task.manage.TaskManager*  
*method*), 80, 152

**P**

RecordTemp (*class in qlib.workflow.record\_temp*), 146  
 RecordUpdater (*class in qlib.workflow.online.update*), 73, 172  
 reduce() (*qlib.model.ens.group.Group* *method*), 161  
 Ref (*class in qlib.data.ops*), 100  
 register() (*qlib.data.ops.OpsWrapper* *method*), 106  
 register\_all\_ops() (*in module qlib.data.ops*), 106  
 register\_all\_wrappers() (*in module qlib.data.data*), 91  
 remove() (*qlib.workflow.task.manage.TaskManager*  
*method*), 81, 152

replace\_task() (*qlib.workflow.task.manage.TaskManager* method), 79, 151

report\_graph() (in module *qlib.contrib.report.analysis\_position.report*), 55, 132

reset\_online\_tag() (*qlib.workflow.online.utils.OnlineTool* method), 71, 170

reset\_online\_tag() (*qlib.workflow.online.utils.OnlineToolR* method), 72, 171

reset\_waiting() (*qlib.workflow.task.manage.TaskManager* method), 81, 152

Resi (class in *qlib.data.ops*), 104

return\_task() (*qlib.workflow.task.manage.TaskManager* method), 81, 152

rewrite() (*qlib.data.storage.storage.FeatureStorage* method), 112

risk\_analysis() (in module *qlib.contrib.evaluate*), 131

risk\_analysis\_graph() (in module *qlib.contrib.report.analysis\_position.risk\_analysis*), 58, 135

RMDLoader (class in *qlib.workflow.online.update*), 73, 172

RobustZScoreNorm (class in *qlib.data.dataset.processor*), 127

Rolling (class in *qlib.data.ops*), 99

RollingEnsemble (class in *qlib.model.ens.ensemble*), 162

RollingGen (class in *qlib.workflow.task.gen*), 149

RollingGroup (class in *qlib.model.ens.group*), 161

RollingStrategy (class in *qlib.workflow.online.strategy*), 70, 169

routine() (*qlib.workflow.online.manager.OnlineManager* method), 68, 166

Rsquare (class in *qlib.data.ops*), 104

run\_task() (in module *qlib.workflow.task.manage*), 82, 153

**S**

safe\_fetch\_task() (*qlib.workflow.task.manage.TaskManager* method), 80, 151

save\_objects() (*qlib.workflow.\_init\_.QlibRecorder* method), 45

save\_objects() (*qlib.workflow.recorder.Recorder* method), 51, 144

score\_ic\_graph() (in module *qlib.contrib.report.analysis\_position.score\_ic*), 57, 133

search\_records() (*qlib.workflow.\_init\_.QlibRecorder* method), 41

search\_records() (*qlib.workflow.exp.Experiment* method), 50, 143

SeriesDFilter (class in *qlib.data.filter*), 91

set\_end\_time() (*qlib.workflow.task.utils.TimeAdjuster* method), 163

set\_online\_tag() (*qlib.workflow.online.utils.OnlineTool* method), 71, 170

set\_online\_tag() (*qlib.workflow.online.utils.OnlineToolR* method), 72, 171

set\_tags() (*qlib.workflow.\_init\_.QlibRecorder* method), 46

set\_tags() (*qlib.workflow.recorder.Recorder* method), 52, 145

set\_uri() (*qlib.workflow.\_init\_.QlibRecorder* method), 44

set\_uri() (*qlib.workflow.expm.ExpManager* method), 49, 142

setup\_data() (*qlib.data.dataset.\_init\_.Dataset* method), 114

setup\_data() (*qlib.data.dataset.\_init\_.DatasetH* method), 28, 114

setup\_data() (*qlib.data.dataset.\_init\_.TSDatasetH* method), 117

in setup\_data() (*qlib.data.dataset.handler.DataHandler* method), 121

setup\_data() (*qlib.data.dataset.handler.DataHandlerLP* method), 25, 124

shift() (*qlib.workflow.task.utils.TimeAdjuster* method), 165

SigAnaRecord (class in *qlib.workflow.record\_temp*), 147

Sign (class in *qlib.data.ops*), 94

SignalRecord (class in *qlib.workflow.record\_temp*), 146

simulate() (*qlib.workflow.online.manager.OnlineManager* method), 69, 168

SingleKeyEnsemble (class in *qlib.model.ens.ensemble*), 162

Skew (class in *qlib.data.ops*), 101

Slope (class in *qlib.data.ops*), 104

start() (*qlib.workflow.\_init\_.QlibRecorder* method), 40

start() (*qlib.workflow.exp.Experiment* method), 49, 142

start\_exp() (*qlib.workflow.\_init\_.QlibRecorder* method), 41

start\_exp() (*qlib.workflow.expm.ExpManager* method), 47, 140

start\_index(*qlib.data.storage.file\_storage.FileFeatureStorage* attribute), 113

start\_index(*qlib.data.storage.storage.FeatureStorage* attribute), 111

start\_run() (*qlib.workflow.recorder.Recorder method*), 52, 145

StaticDataLoader (*class qlib.data.dataset.loader*), 119

Std (*class in qlib.data.ops*), 101

StrategyWrapper (*class qlib.contrib.strategy.strategy*), 129

Sub (*class in qlib.data.ops*), 96

Sum (*class in qlib.data.ops*), 101

**T**

TanhProcess (*class in qlib.data.dataset.processor*), 126

task\_generator() (*in module qlib.workflow.task.gen*), 148

task\_stat() (*qlib.workflow.task.manage.TaskManager method*), 81, 152

task\_train() (*in module qlib.model.trainer*), 154

TaskGen (*class in qlib.workflow.task.gen*), 78, 148

TaskManager (*class in qlib.workflow.task.manage*), 79, 150

TimeAdjuster (*class in qlib.workflow.task.utils*), 163

to\_config() (*qlib.data.filter.BaseDFilter method*), 91

to\_config() (*qlib.data.filter.ExpressionDFilter method*), 92

to\_config() (*qlib.data.filter.NameDFilter method*), 92

TopkDropoutStrategy (*class in qlib.contrib.strategy.strategy*), 130

train() (*qlib.model.trainer.DelayTrainerRM method*), 158

train() (*qlib.model.trainer.Trainer method*), 82, 154

train() (*qlib.model.trainer.TrainerR method*), 155

train() (*qlib.model.trainer.TrainerRM method*), 156

Trainer (*class in qlib.model.trainer*), 82, 154

TrainerR (*class in qlib.model.trainer*), 155

TrainerRM (*class in qlib.model.trainer*), 156

truncate() (*qlib.workflow.task.utils.TimeAdjuster method*), 164

TSDataSampler (*class in qlib.data.dataset.\_\_init\_\_*), 115

TSDatasetH (*class in qlib.data.dataset.\_\_init\_\_*), 116

**U**

update() (*qlib.data.cache.DatasetCache method*), 31, 108

update() (*qlib.data.cache.DiskDatasetCache method*), 110

update() (*qlib.data.cache.DiskExpressionCache method*), 108

update() (*qlib.data.cache.ExpressionCache method*), 30, 107

update() (*qlib.data.storage.file\_storage.FileInstrumentStorage method*), 112

update() (*qlib.data.storage.storage.InstrumentStorage method*), 110

in update() (*qlib.workflow.online.update.DSBasedUpdater method*), 74, 173

update() (*qlib.workflow.online.update.RecordUpdater method*), 73, 172

update\_online\_pred() (*qlib.workflow.online.utils.OnlineTool method*), 72, 170

update\_online\_pred() (*qlib.workflow.online.utils.OnlineToolR method*), 72, 171

uri (*qlib.workflow.expm.ExpManager attribute*), 49, 142

**V**

Var (*class in qlib.data.ops*), 101

**W**

wait() (*qlib.workflow.task.manage.TaskManager method*), 81, 153

WeightStrategyBase (*class qlib.contrib.strategy.strategy*), 129

WMA (*class in qlib.data.ops*), 105

worker() (*qlib.model.trainer.DelayTrainerRM method*), 158

worker() (*qlib.model.trainer.TrainerRM method*), 157

write() (*qlib.data.storage.file\_storage.FileFeatureStorage method*), 113

write() (*qlib.data.storage.storage.FeatureStorage method*), 111

**Z**

ZScoreNorm (*class in qlib.data.dataset.processor*), 126